

# BULKHEAD SYSTEMS

## THE COST-EFFECTIVE WAY TO CONTAIN YOUR INTERMODAL SHIPMENTS.

Norseman's Bulkhead Systems are a low-cost, one-time-use disposable product that is necessary during the exportation of bulk commodities such as peas, lentils, soybeans, malt, barley and other grains.





Norseman's corrugated-cardboard bulkheads are cost-effective containment-wall solutions. The bulkhead acts as a fourth wall at the door end of the container to hold the product in place. Lightweight, double-wall corrugated cardboard with scored flaps makes for easy installation. Simply cut the bulkhead to discharge. Our Bulkhead Systems are suitable for loading by conveyor, auger, gravity, and tilt loading equipment.

In stock, ready to ship from one of our distribution locations.

Norseman's Bulkhead Systems are **GEAR2PERFORM**.




## NORSEMAN, YOUR ONE-STOP SUPPLIER OF **GEAR2PERFORM**.

-  **On-Demand Supply:** Warehousing space and distribution locations across North America.
-  **Exceptional Service:** One-stop supplier of Fabric, Foam and Film Protective solutions.
-  **Superior Quality:** Manufacturing in North America since 1921.
-  **Extensive Experience:** Our Fiercely Reliable<sup>™</sup> team will find a solution to fit your business.

Contact Norseman or your local Sales Representative to order today.



# BULKHEAD SYSTEMS SPECIFICATIONS

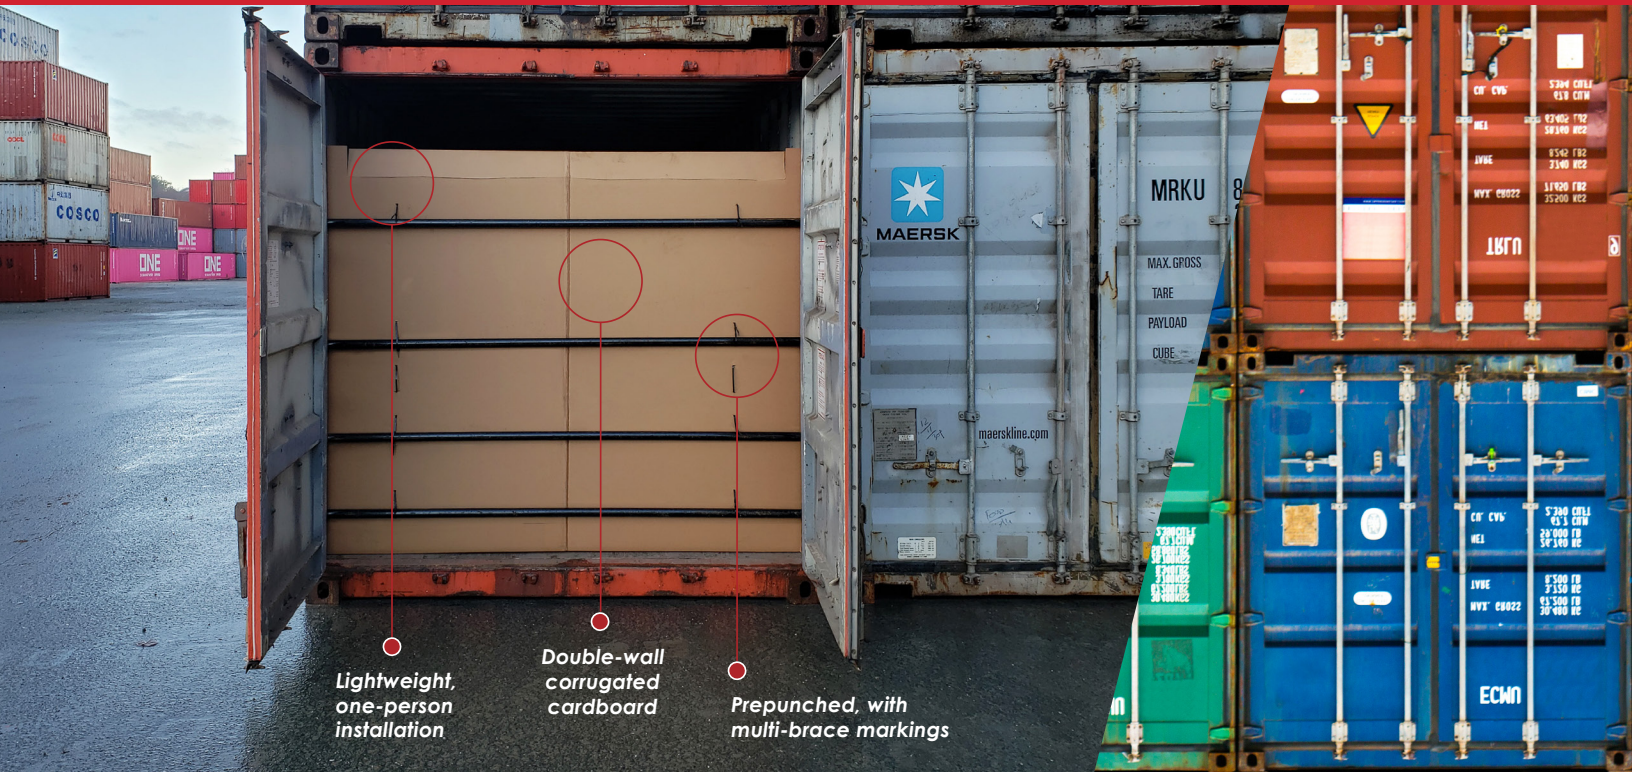

Lightweight,  
one-person  
installation

Double-wall  
corrugated  
cardboard

Prepunched, with  
multi-brace markings

## FEATURES

- Restrain bulk commodities such as peas, lentils, soybeans, malt, barley and other grains.
- Double-wall corrugated cardboard with scored flaps.
- All corrugated bulkheads are prepunched to position handles and steel-bar tie placements.
- Lightweight and cost-effective—can be easily installed by one person.
- For unloading, cut the bulkhead to initiate discharge.
- Custom options available.

## SIZES

- Can be used in 20' or 40' ocean containers.
- Custom bracing systems for 53' intermodal domestic containers and trailers available upon request.



## INSTALL REQUIREMENTS

- Norseman recommends a bar 1.66" OD x .125" wall minimum x 94.5" long or equivalent shaped tubing.

For more information on Norseman protective gear, contact your local Sales Representative.

