

# CHEMICAL & RESIN FULL PE LINERS

## ADDED PROTECTION FOR YOUR **CHEMICAL** **AND RESIN PRODUCTS.**

Convert standard intermodal containers into self-contained transport systems for bulk shipping of granular products such as resins, fertilizers and more.




**Norseman's Chemical and Resin Liners** are fabricated from either a coated woven Polyethylene (PE) membrane or PE film. Norseman's Full PE Liner is used for shipments with free-flowing granular or powder products. This dry-bulk liner forms a dry, clean and protective barrier between the product and the container interior. It provides a contamination-free bulk transport and storage system for dry-bulk commodities within the food, pharmaceutical, chemical and mineral industries.

In stock, ready to ship from one of our distribution locations.

Norseman's Chemical & Resin Full PE Liners are **GEAR2PERFORM**.




## **NORSEMAN, YOUR ONE-STOP SUPPLIER OF GEAR2PERFORM.**

-  **On-Demand Supply:** Warehousing space and distribution locations across North America.
-  **Exceptional Service:** One-stop supplier of Fabric, Foam and Film Protective solutions.
-  **Superior Quality:** Manufacturing in North America since 1921.
-  **Extensive Experience:** Our Fiercely Reliable<sup>TM</sup> team will find a solution to fit your business.

**Contact Norseman or your local Sales Representative to order today.**



# LINER SPECIFICATIONS

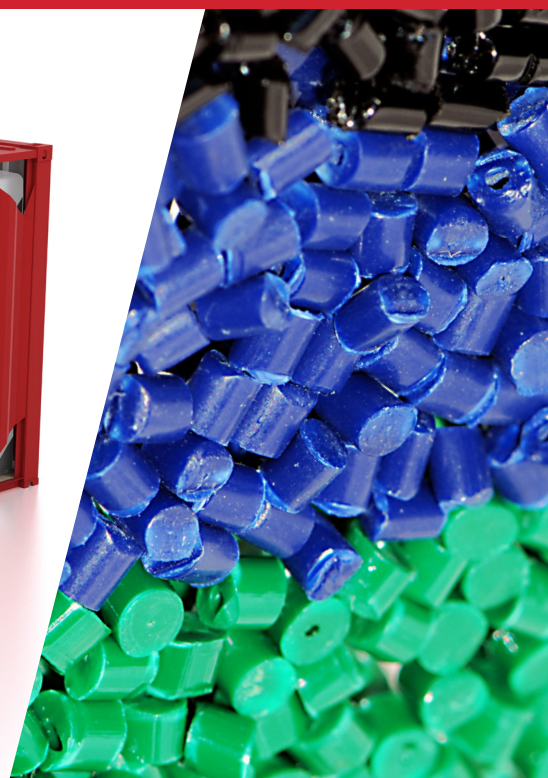

## ⚙️ FEATURES

- Protect products from contaminants and keep products contained in intermodal shipping containers.
- Fabricated with coated woven PE membrane or PE film.
- Full-body welded seams on PE film liners and full-body stitches on woven PE liners reduce your contamination risk.
- Liners are lightweight and flexible for easy handling and installation.
- Certified by ISO 9001–approved production facility.



## SIZES

- Available in 20', 40' and 40' high-cube (HC) sizes.
- Custom options available.



## INSTALL REQUIREMENTS

- Five steel bracing bars (A500 or A53).
- Norseman recommends a bar 1.66" OD x .125" wall minimum x 94.5" long or equivalent shaped tubing.

*For more information on Norseman protective gear, contact your local Sales Representative.*

