


AC Ultra Street Charger Specification

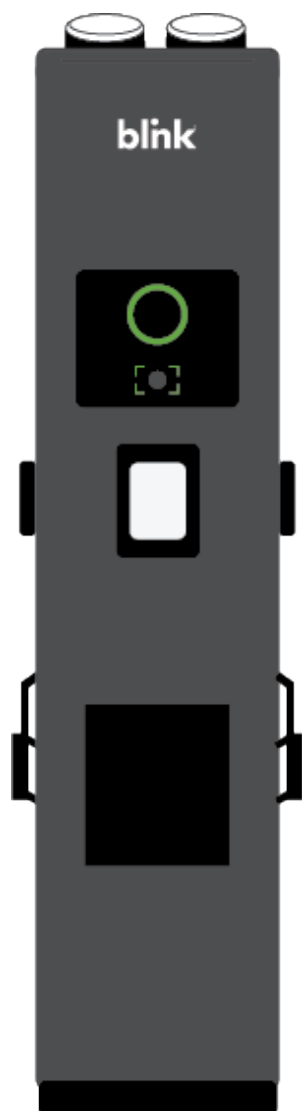

POWER	
Number of Sockets	Two
Input/Output Power	Three phase up to 2x 22kW/32A
Input/Output Voltage	400V±15%, three phase; 50Hz
Connector Type	IEC 62196 Type 2 Socket or Socket with shutter
Residual Current Detection	TypeA+ DC 6mA
FUNCTIONAL	
Connectivity	Wi-Fi, Ethernet, 4G, RS485
Backend Protocol	OCPP 1.6J, OCPP 2.0.1
User Authentication	APP, RFID card, Credit Cards (Optional)
Metering Accuracy	± 1.0%; Build in MID Certified meter
Operating Altitude	2000m
Operating Temperature Range	-30°C ~ +50°C
Storage Temperature Range	-30°C ~ +70°C
Protection	Overcurrent, overvoltage, undervoltage, integrated surge protection, PME
Card Reader	ISO 15693, ISO 14443
Display	APP/LCD (8 inch touch screen, 1280x720)
PHYSICAL PROPERTIES	
Dimensions (H x W x D)	1450 x 310 x 200mm
Approximate Weights (kg)	45kg
Enclosure Rating	IP54, IK10
Mounting	Floor Mount
SAFETY	
Safety Standards	IEC/EN 61851 1, EN 62311, EN 62479, IEC/EN 62955, NEN EN IEC 61439-7
Certification	CE

*Depending on configuration.