


FOLD DOWN LADDERS

RL60 SERIES



PRODUCT OVERVIEW

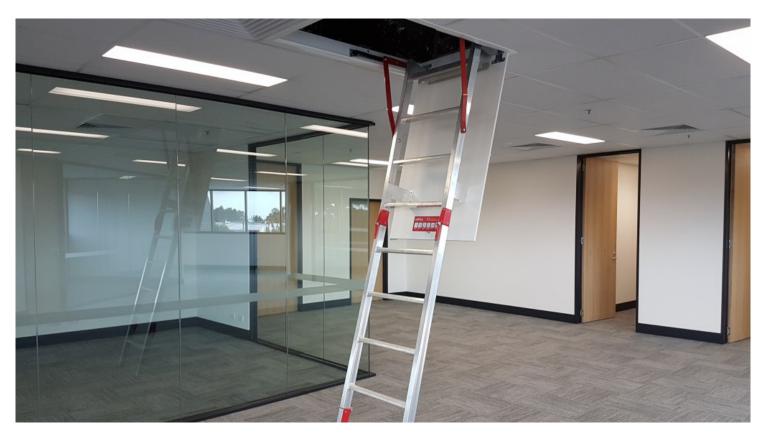

RL60 fold down ladders are ideally suited to access roof and ceiling areas from inside the building. Its easy operation, using gas strut assisted opening and closing, provides additional safety when using this ladder. The minimal look of RL60 series ladders ensure that they blend in with building aesthetics.

The RL60 ladders are supported in place with a suspension kit. Suspension kits are available in various sizes to accommodate different heights and are cut down in the field for perfect fit. The ceiling ladder kit can be used for the secondary ladder to transition between the fold down frame and the rooftop/upper level.

RL62 Heights of 7-10ft



RL63 Heights of 7-14ft



RL62 Suspension kit



RL63 Suspension kit



TECHNICAL SPECIFICATION

Material

- All components and accessories manufactured from high grade 5000 and 6000 series structural aluminium with options for powder coating.
- Fold down door: MelamineFinish: Mill finish standard

Dimensions

- Overall ladder width: 23-3/4in (605mm)
- Distance between stiles: 20-5/8in (525mm)
- Ladder stile: Aluminum extruded stile grade 6106-T6 2-1/4in x 1-1/2in x 1/8in
- Rung diameter: 1-1/4in SQ. 6106-T6 serrated rung
- Rung spacing: 12in (300mm)
- RL62 max height: 7ft to 10ft ladder can be cut on-site for application height
- RL62 frame opening: 48-1/4in x 30-1/2in
- RL63 max height: 7ft to 14ft ladder can be cut on-site for application height
- RL63 frame opening: 64in x 30-1/2in

Weight

RL62 system weight: 89lbs (40kg)RL63 system weight: 110lbs (50kg)

Working load limit

500lbs

Compliance

Kattsafe ladder systems are designed and manufactured to meet and exceed requirements of OSHA standard 1910.23, 1910.28, and CAL-OSHA 3277 as applicable.

Product warranty

5 years from date of purchase subject to installation, use, and maintenance in accordance with manufacturer's specifications and recommendations. Failure to supply and/or install product in accordance with above standards and codes, specifications, and instructions voids complete system certification and/or warranty. Warranty documentation can be found at www.kattsafe.com.