
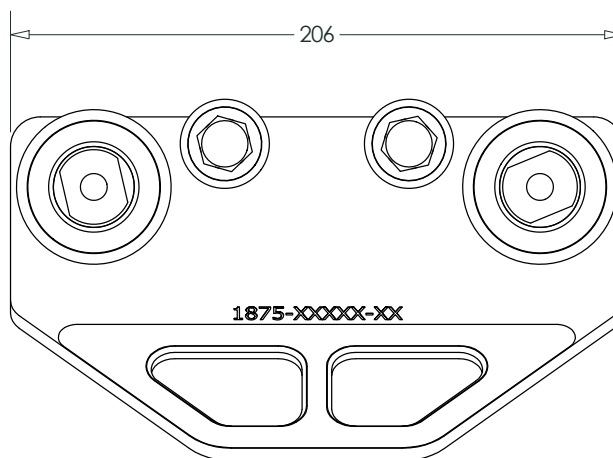
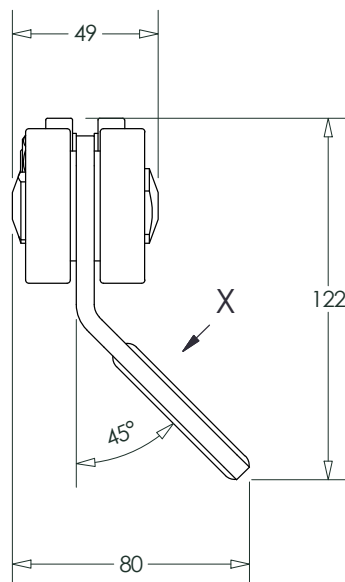


AUXILIARY X

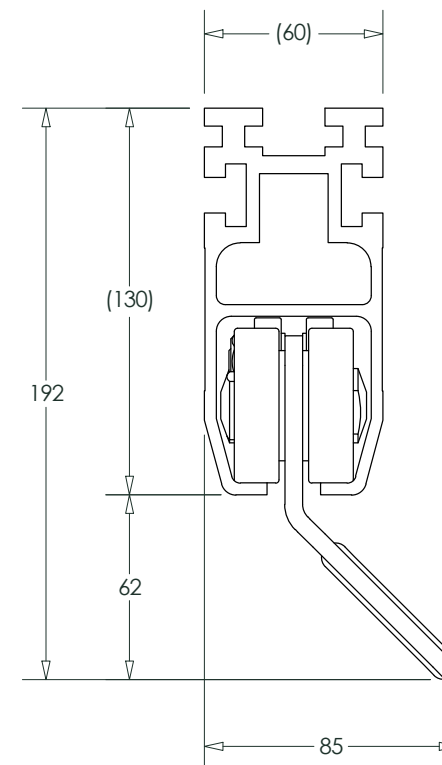

15kN RATED
FOR OVERHEAD ROPE ACCESS APPLICATIONS