


TEMPEST

BOTTOM-LOAD & POU WATER DISPENSER
PRODUCT BROCHURE




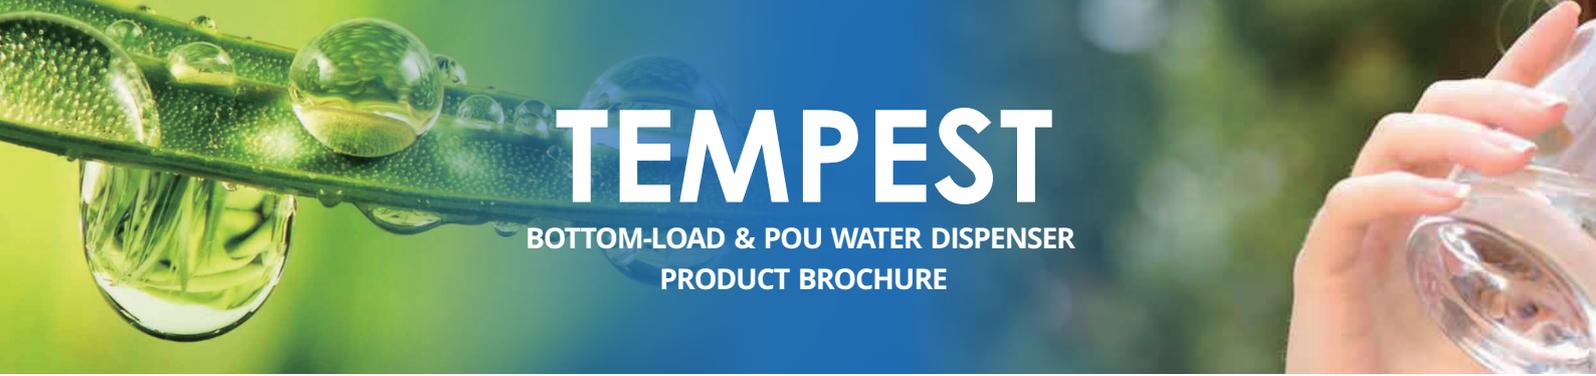

TEMPEST

BOTTOM-LOAD & POU WATER DISPENSER
PRODUCT BROCHURE

PEAK PERFORMANCE AT A VALUE PRICE

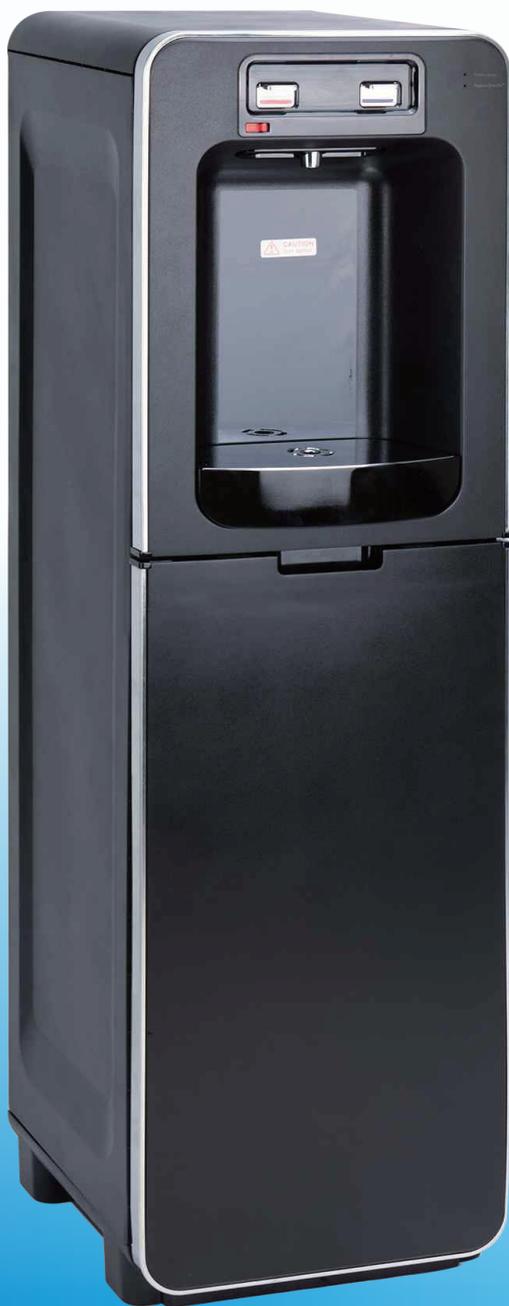

Features

AquaFlo Water Cartridge

Simple: All cold water contact points are exchanged

Quick: All cold water contact points are exchanged

Hygienic: All cold water contact points are exchanged



Tempest POU assembly





TEMPEST

BOTTOM-LOAD & POU WATER DISPENSER
PRODUCT BROCHURE

Performance and specifications

ITEM		SPECIFICATIONS
Power rating		Single phase 100-115VAC 60Hz
Standard current		Hot & Cold: 4.8~5.3A
Power	Cold	70W
Consumption	Hot	500W
Cold	Compressor	Single phase motor
	Refrigerant	R134a
	Temp range	4-10°C (39.2-50°F)
	Temp control	Thermostat (ON 8 °C ±1.5°C, OFF 4 °C ±1.5°C)
	Volume of Cold Reservoir	1.6L (0.4 us gal)
Hot	Heater	Internal heater
	Temp range	76-91°C (168.8-195.8°F)
	Safety device	Bimetal (Limiter: 93 °C OFF)(199.4°F)
	Temp control	Bimetal (85°C)(185°F)
	Capacity (Internal Heater)	1.1L (0.3 us gal)
Refrigerant charge		34g (1.20 oz)
Noise(Sound Power Level)		Pump: ≤50dB(A); Compressor: 43dB(A)
Product weight		Hot & Cold: 16.1kg (35.5 lb)
Product boxed weight		Hot & Cold: 17.6kg (38.8 lb)
Product dimensions		320(W) x 371(D) x 1129(H)mm 12.6"(W) X 14.6"(D) X 44.4"(H)
Product boxed dimensions		360(W) X 406(D) X 1185(H)mm 14.2" (W) X 16.0" (D) X 46.7" (H)
Loading quantity		40' HQ Container: 372 Units
Certifications		UL- ANSI / NSF 372 cULus 399/CAN CAS C22.2 No.120



Tempest dimensions

