

AIRSTREAM®

OWNER'S MANUAL

2027

ATLAS® RT

Tommy Bahama®



Roll With The Best®

User Guide Videos and Airstream Academy

Scan the QR code on the cover or visit <https://support.airstream.com> to view model-specific User Guide Videos that explore topics discussed in this manual. Visit Airstream Academy at <https://www.airstream.com/academy/> to learn the ins and outs of Airstreaming by exploring videos, articles, and frequently asked questions covering a wide range of popular RV topics.

WARNING

Operating, servicing and maintaining a passenger vehicle or off-road vehicle can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service your vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing your vehicle. For more information go to www.P65Warnings.ca.gov/passenger-vehicle

California Consumers

CALIFORNIA CONSUMERS: To comply with California's Song Beverly Consumer Warranty Act pre-litigation notice requirements (described at California Code of Civil Procedure Section 871.24), written notice can be sent to Airstream, Inc., either by email sent to the following email address: support@airstream.com, or by certified or registered mail, return receipt requested, sent to the following address: Airstream, Inc., 428 West Pike Street, P.O. Box 629, Jackson Center, Ohio 45334-0629, Attention: Owner Relations Department.

CONSUMIDORES DE CALIFORNIA: Para cumplir con los requisitos de notificación previa al litigio de la Ley de Garantía del Consumidor Song Beverly de California (descritos en la Sección 871.24 del Código de Procedimiento Civil de California), se puede enviar una notificación por escrito a Airstream, Inc., ya sea por correo electrónico a la siguiente dirección de correo electrónico: support@airstream.com, o por correo certificado o registrado, con acuse de recibo, enviado a la siguiente dirección: Airstream, Inc., 428 West Pike Street, P.O. Box 629, Jackson Center, Ohio 45334-0629, Attention: Owner Relations Department.

Disclaimer And Copyright

All information, illustrations and specifications contained in this manual are based on the latest product information available at the time of publication approval. If and when new materials and production techniques are developed that can improve the quality of its product, or material substitutions are necessary due to availability, Airstream reserves the right to make such changes.

Airstream Tommy Bahama Atlas® 25RT Owner's Manual

©2026 Airstream, Inc. All rights reserved

Publication Date: June 2026

REV# 02

AIRSTREAM®

TABLE OF CONTENTS

INTRODUCTION	1-1	SPRINTER VAN	7-1
SAFETY	2-1	Important Sprinter Information	7-2
Safety Overview	2-2	Tires	7-4
Fire Extinguisher	2-3	Changing A Tire	7-6
Emergency Exits	2-3	Installing and Removing A Wheel	7-8
Fire and Carbon Monoxide Hazards	2-4	Tire Rotation	7-9
Smoke and Carbon Monoxide Alarms (Detectors)	2-6	Air Ride Suspension	7-10
Chemical Sensitivity and Ventilation	2-8	DRIVING	8-1
GENERAL INFORMATION	3-1	Loading	8-2
2-Year Airstream Limited Warranty	3-2	Safety	8-4
Sprinter Van Information	3-5	Trailer Towing and Driving Tips	8-4
Service	3-5	Towing a Trailer	8-6
Camping	3-6	Towing Your Touring Coach	8-10
FLOOR PLANS AND SPECIFICATIONS	4-1	Safety Check List	8-10
Floor Plans	4-2	MAINTENANCE	9-1
Specifications	4-3	Maintenance Schedule	9-2
INTERIOR	5-1	Airstream Service and Parts	9-3
General Information and Cleaning	5-3	Tire Care	9-3
Electrical System Overview	5-7	Plumbing	9-4
Electrical System Operation	5-10	Drain and Waste System	9-6
Entertainment Systems	5-18	Winterizing and Storage	9-8
Appliances	5-20	Electrical Diagrams	9-12
EXTERIOR	6-1	Fresh Water Layout	9-23
Exterior Care	6-2	FAQs and Answers	9-24
Exterior Components	6-4		
Exterior Features	6-6		
Exterior Doors	6-10		
Awning	6-11		
Hitch Cover	6-12		

NOTES

AIRSTREAM®

Section 1 INTRODUCTION

The Owner's Manual for your new Airstream Atlas is designed to respond to the most frequent inquiries regarding the operation, function, and care of the many systems that enhance your travel and camping experience.

The Airstream Atlas is integrated into a Sprinter Van, designed and manufactured by Mercedes-Benz. Operation of the Sprinter, its engine, power train, and other related components are discussed in the Mercedes-Benz Sprinter Operator's Manual and other literature provided by Mercedes-Benz. As a point of reference, those systems discussed in the Sprinter literature are warranted by Mercedes-Benz or their suppliers.

Airstream realizes our customers possess varying degrees of expertise in the area of maintaining and repairing the appliances in their touring coach. For this reason, the service and trouble-shooting information found in this manual is directed toward those with average mechanical skills. We also realize you may be more familiar in one area than you are in another. Only you know your capabilities and limitations.

We want you to use this manual, and hope you will find the information contained in it helpful; however, should you ever feel you may be "getting in over your head," please see your dealer to have the repairs made.

The operation and care of component parts such as, refrigerator, heating and hot water system and others are briefly explained in this manual.

All information, illustrations, and specifications contained in this manual are based on the latest product information available at the time of publication approval. Airstream reserves the right to make changes if and when new materials and/or production techniques are developed that can improve the quality of its product, or when material substitutions are necessary due to availability.

Optional items may be available on all, or particular models. Additionally, some optional items can only be included during the manufacturing phase and cannot later be added to the touring coach. The inclusion of optional items information in this manual does not imply or suggest the availability, application, suitability, or inclusion for any specific unit.

WARNING

Your Mercedes-Benz Sprinter Van Operator's and Warranty Manuals contain important cautions, warnings, operational, and warranty information on the Sprinter and its components. All information in the Sprinter manual should be reviewed and followed for your safety. The Airstream Owner's Manual may provide additional information and tips on the use of the van as a touring coach; however, no information in the Airstream manual should be interpreted as advice or directions to disregard or void the warnings, cautions, or other information contained in the Sprinter's manuals.

Airstream uses the  safety alert symbol and signal words **Danger**, **Warning**, and **Caution** to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death. The following are examples of each type of signal word, safety message, and information message found throughout this manual.

DANGER

Indicates a hazardous situation which, if not avoided, will result in death or serious injury.

WARNING

Indicates a hazardous situation which, if not avoided, could result in death or serious injury.

CAUTION

Indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.

NOTICE

Indicates a potential situation which, if not avoided, may result in damage to your Airstream. Addresses practices not related to personal injury.

NOTE

Provides noteworthy information and tips about your Airstream.

AIRSTREAM®

Section 2 SAFETY

SAFETY OVERVIEW	2-2	SMOKE AND CARBON MONOXIDE ALARMS (DETECTORS)	2-6
Fire and Carbon Monoxide Safety	2-2	Expiration and Replacement.	2-6
Electrical Appliance and Outlet Safety	2-2	Testing	2-6
Seat Belt Safety	2-2	Battery Replacement	2-6
Loading and Weight Distribution Safety	2-2	Maintenance and Troubleshooting	2-7
Tire Safety.	2-2	Smoke Alarm Basic Safety Information.	2-7
Wheel Fastener Torque.	2-2	Carbon Monoxide (CO) Alarm Basic Safety Information	2-7
Mold Safety	2-2	CHEMICAL SENSITIVITY AND VENTILATION	2-8
FIRE EXTINGUISHER	2-3	Chemical Sensitivity	2-8
EMERGENCY EXITS	2-3	Formaldehyde	2-8
Important Safety Notes	2-3	Ventilation	2-8
FIRE AND CARBON MONOXIDE HAZARDS.	2-4	Do Not Smoke	2-8
Symptoms of Carbon Monoxide Poisoning	2-4	Medical Advice	2-8
Conditions That Can Create Dangerous Carbon Monoxide Levels	2-5		
Vehicle Engine and Fuel-Burning Appliance Exhaust	2-5		

Safety Overview

Your safety and the safety of those around you depend on using good judgment. Carelessness with fire, smoking, flammable liquids, or other hazards greatly increases the risk of accidents. This section highlights the most critical safety considerations, along with additional tips found throughout the manual. Please review them carefully, along with the component and appliance manuals provided in your owner's packet, before operating your Airstream.

Fire and Carbon Monoxide Safety

Familiarize yourself and all other occupants with the alarms designed to alert you to dangerous situations. Alarms require periodic maintenance and batteries. Your safety depends on these devices functioning properly. Never ignore alarms. For more information, [see Smoke and Carbon Monoxide Alarms \(Detectors\) on page 2-6](#).

Familiarize yourself and all other occupants with the use of the provided fire extinguisher and emergency exits, discussed in this section.

Portable fuel burning equipment, including wood and charcoal grills and stoves, must never be used inside the vehicle. Keep flammable liquids and materials out of your Touring Coach.

Never run the vehicle's engine or any fuel burning appliances in an enclosed building or a partly enclosed area such as a garage, as this can lead to dangerous carbon monoxide buildup. For more information, [see Fire and Carbon Monoxide Hazards on page 2-4](#)

Electrical Appliance and Outlet Safety

Improper handling of electrical components can be fatal. Do not touch or use electrical components or appliances with bare feet, while hands or feet are wet, or while standing in water or on damp ground; [see Electrical System Overview on page 5-7](#)

Seat Belt Safety

Do not allow passengers to ride anywhere in the touring coach except in seats equipped with approved seat belts. For more information on seat belt safety, refer to your vehicle Owner/Operator Manual and [see Seat Belts on page 8-4](#).

Loading and Weight Distribution Safety

Exceeding the Occupant and Cargo Carrying Capacity (OCCC) of your RV can lead to dangerous operating conditions. Overloading increases the risk of loss of control, tire failure, suspension damage, and reduced braking performance, which may result in serious injury or death.

Touring coaches have fresh water and wastewater holding tanks and multiple storage areas. It gives you great flexibility in loading. If you want to load down all the storage compartments, you may need to reduce the volume of fluids you carry.

Distribute your additional cargo as evenly as possible with the heaviest objects located as low as possible. For detailed information on capacity, loading, and weight distribution [see Specifications on page 4-3](#) and [see Loading on page 8-2](#).

Tire Safety

Properly maintained tires improve the steering, stopping, traction, and load-carrying capability of your vehicle. Be sure to read the Tire Safety information included in your vehicle Owner/Operator Manual. In addition, [see Tire Care on page 9-3](#).

Wheel Fastener Torque

Proper wheel fastener torque helps ensure wheels remain securely attached under load, reducing the risk of loosening or separation and minimizing abnormal wear on tires and related components.

Wheel fastener torque must be checked immediately after reinstalling a wheel and again after 30 miles. Torque all wheel fasteners evenly to specification using the proper sequence; [see Wheel Bolt/Lug Nut Tightening on page 7-8](#). For torque values, [see Specifications on page 4-3](#)

Mold Safety

Mold and mold spores are present in both indoor and outdoor environments. While it is not practical to eliminate all sources, indoor mold growth can be mitigated by controlling moisture and humidity. If left unchecked, mold can cause health problems such as allergic reactions, respiratory symptoms, asthma flare-ups, and, in some cases, infections or more severe reactions in people with asthma or weakened immune systems; [see What factors contribute to mold growth on page 3-9](#).

Fire Extinguisher



The fire extinguisher should be checked regularly to ensure it is fully charged and in good condition. Read and follow the instructions on the extinguisher carefully. Make sure all occupants know how to release the extinguisher from its storage bracket and how to properly operate it. If the fire extinguisher is used, it must be replaced to ensure it is ready in the event of an emergency.

Your local fire department may provide demonstrations, answer questions, and help confirm that your extinguisher is in proper working order.

⚠ WARNING

Fire extinguishers have a limited service life and may deteriorate over time. Check the manufacturer's expiration or manufacture date, and replace the extinguisher according to the manufacturer's recommendations. Inspect the extinguisher regularly — including the pressure gauge (if equipped) — and replace it immediately if it has been discharged (even partially) or shows visible damage.

Emergency Exits

Your touring coach has four exits: the driver's door, passenger door, side entry door, and the emergency exit window over the roadside twin bed.

Everyone traveling in the coach should know how to operate these doors and windows, and exit quickly, even in the dark. Plan and practice emergency exits at each campsite — a few minutes spent rehearsing can make a critical difference in an actual emergency.

Important Safety Notes

- The side entry door step takes a few seconds to extend once the door is opened. If power is unavailable, the step may not extend at all. Always look carefully before using this exit.
- Do not block access to any exit from inside or outside the coach.
- When parking, ensure doors and escape routes are clear of obstacles such as trees, fences, or steep drops.

⚠ DANGER

At each campsite, make sure you have not parked in such a manner as to block the operation of the doors or escape avenues by being too close to trees, fences, or other impediments. Scenic views are one reason for traveling, but do not park so that a beautiful lake or steep cliff is immediately outside your doors. Do not block access to the doors from the inside or outside of the vehicle.

Fire and Carbon Monoxide Hazards

Portable fuel burning equipment, including wood and charcoal grills and stoves, must not be used inside the recreational vehicle.

⚠ DANGER

Portable fuel burning equipment, including wood and charcoal grills and stoves, shall not be used inside the recreational vehicle. The use of this equipment inside the recreational vehicle may cause fires or asphyxiation.

⚠ DANGER

DO NOT use cooking appliances or portable gas heaters for comfort heating. Before operating provided equipment, open overhead vents or turn on exhaust fans and open a window.

⚠ DANGER

DO NOT store LP containers within the vehicle. LP containers are equipped with safety devices that vent gas should the pressure become excessive.

⚠ DANGER

Do not smoke inside the touring coach. Keep matches out of reach of small children. Do not bring flammable liquids inside the RV or clean with flammable materials. Keep flammable materials away from open flames. We have all heard these warnings many times, but they are still among the leading causes of fires.

Carbon monoxide (CO) is a highly poisonous gas produced when fuels burn. It is invisible, odorless, and undetectable by human senses. CO can become a serious hazard in tightly sealed vehicles with added insulation, sealed windows, and other weatherproofing that can trap gases inside.

⚠ DANGER

Carbon Monoxide is poisonous and can cause confusion, unconsciousness, and death. Follow all instructions, cautions, and warnings in this section.

Carbon monoxide can come from many fuel sources, including but not limited to: wood, coal, charcoal, oil, natural gas, gasoline, diesel fuel, kerosene, and propane. LP gas appliances and grills are common sources of carbon monoxide. The vehicle's engine and any onboard diesel or gasoline fuel-burning appliances will expel exhaust gases, including carbon monoxide, through external exhaust systems. If any of these are not properly maintained, ventilated, or are malfunctioning, CO levels can rise quickly.

Under normal conditions, the small amount of CO that may drift in from outside or from beneath the vehicle is not dangerous in a properly ventilated space, provided you take precautions when parking the coach; [see Vehicle Engine and Fuel-Burning Appliance Exhaust on page 2-5](#).

⚠ WARNING

This RV is designed for use with non-vented batteries only. Installing batteries that require venting may release flammable or poisonous gases and can result in fire, explosion, serious injury, or death.

Symptoms of Carbon Monoxide Poisoning

- **Mild Exposure** - Slight headache, nausea, vomiting, fatigue (flu-like symptoms).
- **Medium Exposure** - Throbbing headache, drowsiness, confusion, fast heart rate.
- **Extreme Exposure** - Convulsions, unconsciousness, heart and lung failure. Exposure to CO can cause brain damage and/or death.

⚠ DANGER

Many causes of reported CARBON MONOXIDE POISONING indicate that while victims are aware that they are not well, they become so disoriented that they are unable to save themselves by either exiting the area or calling for assistance. Young children and pets may be the first to be affected.

Conditions That Can Create Dangerous Carbon Monoxide Levels

1. Excessive spillage or reverse venting of fuel-burning engines, generators, and appliances can occur under certain outdoor conditions, such as:
 - Wind direction and/or velocity, including high gusts of wind.
 - Heavy air in the vent pipes (cold/humid air with extended periods between cycles).
 - Negative pressure differential resulting from use of exhaust fans.
 - Simultaneous operation of several fuel-burning appliances competing for limited internal air.
 - Exhaust connections vibrating loose.
 - Obstructions in or unconventional vent-pipe designs which can amplify the above situations.
2. Extended use of un-vented fuel burning devices.
3. Running the vehicle's engine or fuel-burning appliances in enclosed or confined spaces.
4. Temperature increase that can trap exhaust gases near the ground.

DANGER

NEVER ignore any alarm. Failure to respond can result in injury or death. Any alarm silence features are for your convenience only and will not correct a problem. Always check your touring coach for a potential problem after any alarm. Failure to do so can result in injury or death.

Vehicle Engine and Fuel-Burning Appliance Exhaust

Internal combustion engines, such as the vehicle's engine and any onboard diesel or gasoline fuel-burning appliances, will produce exhaust gases, including carbon monoxide, when running. These gases are expelled through external exhaust systems. For additional information, refer to your vehicle owner's manual and, [see Appliances on page 5-20](#).

To reduce the risk of carbon monoxide exposure or other hazardous conditions:

1. DO NOT run the vehicle's engine or any fuel burning appliances in an enclosed building or a partly enclosed area such as a garage.
2. DO NOT operate the vehicle's engine or any fuel burning appliances when parked close to objects that could block the exhaust and force fumes inside; examples include thick vegetation, snow, buildings, and other vehicles.
3. DO NOT operate the vehicle's engine or any fuel burning appliances when parked in high grass or brush. The heat from exhaust system components could cause a fire in dry conditions.
4. DO NOT touch any part of an exhaust system when the vehicle's engine or any fuel burning appliances are running, or in the process of cooling. The heat coming off exhaust systems can cause severe burns. Allow the exhaust systems to cool before attempting maintenance or service.

DANGER

The vehicle's engine and any onboard fuel-burning appliances produce exhaust gases, including carbon monoxide. Prolonged exposure to exhaust gases may cause headaches, nausea, chest tightness, wheezing, cough, and irritation of the eyes, nose, and throat, and in high concentrations can be fatal.

WARNING

Touching hot exhaust system components can cause severe burns.

Smoke and Carbon Monoxide Alarms (Detectors)

Your Airstream is equipped with a smoke alarm and a carbon monoxide alarm. Depending on your Airstream model and date of manufacture, these may be separate devices or combined into a single unit that functions as both a smoke alarm and a carbon monoxide detector. For the purposes of this section, these items will be discussed as separate devices. All warnings and instructions in this section apply, regardless of the type of installation.

Refer to the instructions provided in your owner's packet for operation, testing, battery replacement, troubleshooting, and maintenance requirements for these safety devices.



If instructions were not included in your owner's packet, contact your Airstream dealership, Airstream Customer Relations by email at support@airstream.com or phone at (937) 596-6111, or scan the QR code above to visit <https://www.firstalert.com> and navigate to product support to obtain a copy.

⚠ WARNING

For the safety of all occupants, carefully read the manuals for the smoke and carbon monoxide alarms included in your owner's packet. These manuals provide critical safety information and troubleshooting guidance, as well as instructions for testing, maintenance, and replacement—including service life and end-of-life indications—that must be followed to ensure the alarms function properly and alert you to dangerous situations.

⚠ WARNING

If either alarm sounds, exit immediately and call the Fire Department. In the event of a carbon monoxide alarm, exit immediately and move everyone to a fresh-air location. Do not remove the batteries.

Expiration and Replacement

All alarms have a limited service life, after which they may no longer function reliably. The manufacturer specifies this lifespan in the device manual. However, Airstream recommends replacing alarms every five years due to the unique environment and conditions these devices are exposed to in an RV.

⚠ WARNING

Smoke and Carbon monoxide alarms have a limited life. Replace alarms immediately if they are not operating properly. You should always replace an alarm after 5 years from the date of purchase. Write the purchase date on the space provided on the back of the unit.

Testing

Smoke and carbon monoxide alarms should be tested at regular intervals: after the vehicle has been in storage, before each trip, and at least once per week during use. Refer to the manufacturer's instructions to properly perform these tests.

⚠ WARNING

Test alarms after the vehicle has been in storage, before each trip, and at least once a week while in use. If the alarm ever fails to test correctly, have it replaced immediately. If the alarm is not working properly, it cannot alert you to a problem. Failure to perform the test procedure can result in death or serious injury.

Battery Replacement

Batteries in both the smoke alarm and carbon monoxide alarm should be replaced once a year. Always use the exact brand and type of battery specified in the alarm manufacturer's instructions. Do not use rechargeable batteries.

Do not wait for the alarm to chirp before replacing the battery. If either alarm is chirping, replace its battery immediately.

The battery door will resist closing until batteries are installed. This warns you that the unit will not operate without batteries.

⚠ WARNING

Alarms are typically shipped with batteries in place and deactivated. Ask your dealer to activate the batteries, or, activate them immediately upon delivery. Failure to follow this warning will remove your protection.

Maintenance and Troubleshooting

Smoke and carbon monoxide alarms should periodically be cleaned to prevent the buildup of contaminants that can cause false alerts. Refer to the manufacturer's instructions for properly cleaning and caring for both smoke and carbon monoxide alarms. If an alarm becomes contaminated by excessive dust or debris, causing unwanted alarms, replace the unit immediately.

Each manufacturer's manual includes sections on troubleshooting LED light flashes (codes), alarm chirps, and recurring alarms. If you notice anything out of the ordinary, refer to the specific manual in your owner's packet to determine the type and meaning of indicators.

Smoke Alarm Basic Safety Information

- Smoke alarms only indicate the presence of smoke that reaches the sensor.
- Smoke alarms are not designed to sense gas, heat or flames.
- Smoke alarms cannot operate without working batteries. Removing the batteries for any reason, or failing to replace the batteries at the end of their service life, removes your protection.
- NEVER ignore any alarm. Failure to respond can result in injury or death.
- Any silence features are for your convenience only and will not correct a problem. Always check for a potential problem after any alarm. Failure to do so can result in injury or death.
- Test alarms once a week. If an alarm ever fails to test correctly, have it replaced immediately! If any alarm is not working properly, it cannot alert you to a problem.

Carbon Monoxide (CO) Alarm Basic Safety Information

- CO alarms are intended for use in ordinary indoor locations. It is not designed to measure CO levels in compliance with Occupational Safety and Health Administration (OSHA) commercial or industrial standards. Individuals with medical conditions that may make them more sensitive to carbon monoxide may consider using warning devices which provide audible and visual signals for carbon monoxide concentrations under 30 ppm. For additional information on carbon monoxide and your medical condition contact your physician.

- CO Alarms are designed to detect carbon monoxide from ANY source of combustion. It is NOT designed to detect smoke, fire, or any other gas.
- CO Alarms will only indicate the presence of carbon monoxide gas at the sensor. Carbon monoxide gas may be present in other areas.
- CO alarms cannot operate without working batteries. Removing the batteries for any reason, or failing to replace the batteries at the end of their service life, removes your protection.
- NEVER ignore any alarm. Failure to respond can result in injury or death. CO may be present even if nothing is seen or smelled.
- Any silence features are for your convenience only and will not correct a problem. Always check for a potential problem after any alarm. Failure to do so can result in injury or death.
- Test alarms once a week. If an alarm ever fails to test correctly, have it replaced immediately! If any alarm is not working properly, it cannot alert you to a problem.
- Ensure that the alarm can be heard by all those who are intended to hear it.
- Do not expose to rain or moisture. Do not knock or drop the alarm. Do not open or tamper with the alarm as this could cause a malfunction.
- Seek medical help if it is suspected that someone is suffering from Carbon Monoxide poisoning.
- Carbon monoxide alarms are not a substitute for the proper servicing of fuel-burning appliances.
- Carbon monoxide alarms are not to be used on an intermittent basis, or as a portable alarm for spillage of combustion products from fuel-burning appliances.
- Room spaces should be well ventilated when household cleaning supplies are used as these may cause a false alarm.

Chemical Sensitivity and Ventilation

Chemical Sensitivity

Immediately after purchasing your new recreational vehicle, or after it has been unused for an extended period, you may notice strong odors and experience chemical sensitivity. This is not a defect. Like a new home, many products used in the construction of recreational vehicles, including carpet, linoleum, plywood, insulation, and upholstery, can emit odors as they adjust to their environment.

In addition, formaldehyde, a naturally occurring substance used in building materials and a by-product of combustion and other common processes, may also be present inside your touring coach, as it is present in numerous household products such as paints, coatings, and cosmetics.

In the enclosed space of a recreational vehicle, these emissions can sometimes accumulate through a process referred to as off-gassing. Off-gassing may cause irritation of the eyes, nose, and throat, as well as occasional headache, nausea, or asthma-like symptoms. Elderly persons, young children, and anyone with a history of asthma, allergies, or lung problems may be more susceptible.

Formaldehyde

Formaldehyde is widely used in building materials and household products. It is also a by-product of combustion and other natural processes and may be present inside the touring coach. Trace levels of formaldehyde are released from smoking, cooking, and using soaps, detergents (such as carpet shampoos), and many other household products. Some people are very sensitive to formaldehyde, while others may not react to the same levels.

Your Airstream touring coach uses low formaldehyde-emitting (LFE) wood products, which are standard in the recreational vehicle industry. Formaldehyde is an essential component of the adhesives that bind these wood products. The wood products in your coach are designed to emit formaldehyde at or below industry guidelines and should not cause symptoms in most individuals.

While LFE wood products typically do not emit formaldehyde at levels that would cause symptoms, it is possible, though unlikely, for symptoms to occur if the touring coach is improperly ventilated. Ventilation is essential for many reasons.

Ventilation

Proper ventilation is critical to reduce exposure to chemicals from off-gassing, including formaldehyde. Emissions naturally decrease over time, but you can further minimize exposure and aid in this natural process by opening windows, doors, and roof vents, and running vent fans or the air conditioner.

Ventilate frequently, especially after purchase or during periods of elevated temperature and humidity, as these conditions accelerate off-gassing. Sealing the vehicle reduces airflow and can increase indoor formaldehyde levels.

Airstream strongly recommends that you ventilate your touring coach regularly. If you have any questions about proper ventilation, please contact your dealer or Airstream.

Do Not Smoke

It is recommended you do not smoke inside your recreational vehicle. In addition to causing damage to your recreational vehicle, tobacco smoke releases formaldehyde and other toxic chemicals.

Medical Advice

Questions regarding the effects of formaldehyde on your health should be directed to your doctor or local health department.

AIRSTREAM®

Section 3 GENERAL INFORMATION

2-YEAR AIRSTREAM LIMITED WARRANTY	3-2	CAMPING	3-6
SPRINTER VAN INFORMATION	3-5	Suggested Pre-Travel Check List	3-6
SERVICE.	3-5	Exterior	3-6
Coach-Net® Roadside Assistance	3-5	Interior	3-6
Service Centers	3-5	Touring Coach Equipment and Accessories	3-6
Reporting Safety Defects	3-6	Motoring Essentials	3-6
		Overnight Stop	3-7
		Overnight or Weekend Trips	3-7
		Longer Trips	3-7
		Extended Stay	3-7
		Leveling	3-7
		Effects of Prolonged Occupancy	3-8
		About Molds	3-9
		What are molds	3-9
		What factors contribute to mold growth	3-9
		How can mold growth be inhibited	3-9
		Wastewater System	3-9
		Things Not to Put into Toilet or Drains	3-9
		Drain System	3-10
		Winter Traveling	3-10
		Heated Tanks	3-10

General Information

2-Year Airstream Limited Warranty

AIRSTREAM®

1001 West Pike St., Jackson Center, OH 45334-0629

2027 ATLAS

2-YEAR AIRSTREAM

LIMITED WARRANTY

Delivery Date: _____

Airstream Serial Number: _____

Chassis Serial Number: _____

PURCHASED BY: _____

PURCHASED FROM: _____

Name: _____

Dealer Name: _____

Address: _____

Address: _____

City/State: _____ Zip: _____

City/State: _____ Zip: _____

THIS LIMITED WARRANTY COVERS: (i) The first retail owner and any subsequent owners for a period of 2 years; (ii) ONLY those portions of a NEW motorhome not excluded under the section "What is Not Covered," when sold by an authorized dealership and used for its intended purpose of recreational travel and camping; and, (iii) ONLY defects in workmanship performed and/or materials used to assemble those portions of your motorhome not excluded under the section "What is Not Covered." "Defect" means the failure of the workmanship performed and/or materials used to conform with the design and manufacturing specification and tolerances of Airstream. This Limited Warranty is transferable, and the subsequent owner's warranty coverage period shall be the unexpired balance of the original warranty coverage period. A completed copy of the Warranty Transfer Form must be submitted to Airstream at the time of resale.

When you request and accept the performance of warranty repairs under the terms of this Limited Warranty, you are accepting all terms of this Limited Warranty, including by way of example, warranty limitations and disclaimers, the forum selection clause and the clause reducing the time period when suit must be filed for breach.

If any term or condition in this Limited Warranty conflicts with your state's Uniform Commercial Code ("UCC") as interpreted by courts within your state, the provisions of your state's UCC are varied as allowed for by USS 1-302.

COVERAGE ENDS: 24 months after the first retail owner first takes delivery of the motorhome from an authorized dealership. Delivery occurs when the retail owner takes physical possession of the motorhome or has alterations done to it, whichever occurs first. ANY ACTION FOR BREACH OF THIS WARRANTY OR ANY IMPLIED WARRANTIES MUST BE COMMENCED NOT MORE THAN 25 MONTHS AFTER DATE OF DELIVERY. Some states do not allow the reduction of the time when a breach of warranty claim must be commenced, so the reduction in time when a breach of warranty claim must be commenced may not apply to you.

LIMITATION OF IMPLIED WARRANTIES: IMPLIED WARRANTIES ARISING UNDER APPLICABLE LAW, IF ANY, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE HEREBY LIMITED IN DURATION TO THE TERM OF THIS WARRANTY AND ARE LIMITED IN SCOPE OF COVERAGE TO THOSE PORTIONS OF THE MOTORHOME COVERED BY THIS WARRANTY. THERE ARE NO EXPRESS WARRANTIES OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY ON THOSE PORTIONS OF THE MOTORHOME EXCLUDED FROM COVERAGE. There is no warranty of any nature made by Airstream beyond that contained in this Limited Warranty. No person has authority to enlarge, amend, or modify this Limited Warranty. The dealer is NOT Airstream's agent. Airstream is not responsible for any undertaking, representation, or warranty made by any dealer or others beyond those expressly set forth within this Limited Warranty. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU.

DISCLAIMER OF INCIDENTAL AND CONSEQUENTIAL DAMAGES: Airstream disclaims any and all incidental and consequential damages, including but not limited to expenses such as transportation to and from dealerships and Airstream repair facilities, loss of time, loss of pay, loss of use, inconvenience, commercial loss (including but not limited to lost profits), towing charges, bus fares, vehicle rental, service call charges, gasoline expenses, incidental charges such as telephone calls and facsimile transmissions, and expenses for lodging and moisture damage such as mold and mildew as well as rust and corrosion. This disclaimer is independent of any failure of the essential purpose of any warranties provided with the motorhome and shall survive any determination that a warranty failed of its essential purpose. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

REPAIR REMEDY: Airstream's sole and exclusive obligation is to repair any covered defects discovered within the warranty coverage period if: (1) within 10 days of your discovery of a defect, you notify Airstream OR an authorized dealership of the defect; AND (2) you deliver your motorhome to Airstream OR an authorized dealership at your cost and expense.

BACK-UP REMEDY: If the primary repair remedy fails to successfully cure any defect after a reasonable number of repair attempts, your sole and exclusive remedy shall be to have Airstream pay an independent service shop of your choice to perform repairs to the defect, which requires the exercise of good faith. If you select an independent service shop, you must notify Airstream to allow it to work directly with the service shop to have repairs performed. The repair remedy and the back-up remedy MUST both be exhausted AND these remedies must fail to fulfill their essential purpose before you can seek other legal or equitable remedies for breach of this express warranty or for breach of any implied warranty. THIS LIMITED WARRANTY IS NOT A WARRANTY THAT PROMISES OR EXTENDS TO FUTURE PERFORMANCE BECAUSE THE WARRANTY DOES NOT MAKE A REPRESENTATION ON HOW YOUR MOTORHOME WILL PERFORM IN THE FUTURE BUT INSTEAD REPRESENTS ONLY WHAT THE REMEDY WILL BE IF A DEFECT EXISTS.

Unless prohibited by state law, repairs will not extend the time when you must commence a breach of warranty claim and shall not extend the warranty coverage period. Any performance of repairs after the warranty coverage ends OR any performance of repairs to those portions of your motorhome excluded from coverage shall be considered "good will" repairs. Warranty repairs should be expected. Airstream may use new and/or remanufactured parts and/or components of substantially equal quality to complete a repair. Damage to interior or exterior surfaces, trim, upholstery, and other appearance items may occur at the factory during assembly, during delivery of the motorhome to your selling dealer or on the selling dealer's lot. Normally, any damage is detected and corrected at the factory or by the selling dealer during the inspection process. If you discover any damage when you take delivery of your motorhome, you MUST notify your dealer OR Airstream within 10 days of the date of purchase to have damage repaired at no cost to you. Minor adjustments, such as adjustments to the interior or exterior doors, drawers, and latches will be performed at no cost to you by your selling dealer during the first 90 days of warranty coverage; thereafter, such adjustments are your exclusive responsibility as normal maintenance.

WHAT IS NOT COVERED

1. The Mercedes-Benz chassis and power train, including, by way of example, the engine, drive-train, steering, ride and handling, braking, wheel balance, muffler, tire wear or failure, tubes, batteries and gauges, suspension, cab doors, etc.
2. Accessories and equipment that are working as designed, but which you are unhappy because of the design;
3. Normal deterioration due to wear or exposure, including but not limited to floor coverings, rust, corrosion, oxidation, and cosmetic blemishes. In addition, this Limited Warranty does not apply to consumable parts that are designed to diminish over time, unless failure has occurred due to a defect in materials or workmanship;
4. Normal maintenance and service items, including but not limited to batteries, tires, glass breakage, fuses, bulbs, lubricants, sealants and seals, door adjustments, and awning tension. In addition, this Limited Warranty does not apply to consumable parts that are designed to diminish over time, unless failure has occurred due to a defect in materials or workmanship;
5. After-market equipment or accessories installed on the motorhome after completion of manufacture by Airstream, or any defects or damage caused by such items;
6. Motorhomes not purchased through an authorized dealer of Airstream and motorhome's purchased directly or indirectly through auction, salvage, repossession, or other non-customary sale means.
7. Any motorhome used other than for temporary recreation purposes, including, but not limited to, use of the motorhome for residential, rental, business and commercial purposes, or any motorhome purchased by, registered by, or titled in the name of a business association (such as any LLC, corporation, or partnership). If the motorhome owner or user files a tax form claiming a business or commercial tax benefit or income related to the motorhome, it shall be irrefutable that the motorhome has been used for rental, commercial or business purposes.
8. Defects or damage caused by, in whole or in part, or in any way related to: Accidents, misuse (including off-road use), or negligence; Failure to comply with the instructions set forth in any owner's manual provided with the motorhome; Alteration or modification of the motorhome except such alterations or modifications approved in writing by Airstream; Acts of God or other environmental conditions, such as lightning, hail, salt causing rust, or other chemicals in the atmosphere; De-icing agents or other chemicals applied to the motorhome; Failure to properly maintain or service the motorhome, including but not limited to the maintenance of lubricants, sealants, and seals; Condensation and the results of condensation including water damage and the growth of mold or mildew (mold and mildew are natural growths given certain environmental conditions and are not covered by the terms of this Limited Warranty); The addition of weight to the motorhome that causes the total weight to exceed applicable vehicle weight ratings, or addition of weight causing improper distribution of the weight of the motorhome; Failure to seek and obtain repairs in a timely manner; Failure to use reasonable efforts to mitigate damage caused by defects; Failure to properly ventilate the motorhome; Improper electric power supply or improper motorhome hookup to other facilities; Acts or omissions of any person or entity other than Airstream.
9. Hardware or software of a third-party device that is connected to the motorhome or its components, even if integrated or delivered with the motorhome. Airstream is not responsible for the quality or accuracy of any information or service accessed through or from any third-party device or platform. Software distributed by Airstream inside or outside the motorhome (including, but not limited to, system software and or applications) is not covered by this Limited Warranty. Airstream does not warrant that connections to, from or through the motorhome will be uninterrupted or error-free. Also, the user should back-up their data and information frequently. Airstream is not responsible for any loss or damage to data or information made available in connection with the use of the motorhome. In addition, this Limited Warranty does not apply to: (a) to damage caused by use with another product or service; (b) to damage caused by a third party device or service (including upgrades and expansions), or (c) to obsolescence or lack of utility due to incompatibility with future versions of external hardware or software, including, but not limited to mobile devices.

OBTAINING WARRANTY SERVICE: In order to obtain warranty service under this Limited Warranty, the owner must do all of the following:

1. Owner and dealer representative must complete, sign, and return the Customer Performance Checkout within 10 days from delivery of the motorhome;
2. Notify Airstream or one of its authorized, independent dealers, of any claimed defect within the warranty period or 10 days thereafter;
3. Provide notification of a defect within 10 days of discovery of that defect; and
4. Promptly return the motorhome to an authorized Airstream dealer or Airstream for repairs.

If you believe a defect covered by this Limited Warranty still exists after an attempted repair by an authorized Airstream dealer, you must contact Airstream in one of the following manners, and specify:

1. The complete serial number of the motorhome;
2. The date of original purchase and the date of original delivery;
3. The name of the selling dealer; and servicing dealer, if they are not the same.
4. The nature of the problem and the steps or service which have been performed.

Email: support@airstream.com • Phone: (937) 596-6111

Mail: AIRSTREAM, INC., 428 West Pike Street, P.O. Box 629, Jackson Center, Ohio 45334-0629, Attention: Owner Relations Department

General Information

Airstream may direct you to an authorized Airstream dealer or may request that you bring your motorhome to the Airstream factory in Jackson Center, Ohio for repairs. Airstream does not control the scheduling of repairs at its authorized Airstream dealers, and repairs at the Airstream factory may not be immediately available. Therefore, you may encounter delays in scheduling repairs and/or completion of repairs. All costs associated with transporting the motorhome for any warranty service shall be the sole responsibility of the owner.

CONSUMER ARBITRATION PROGRAM: For recreation vehicles purchased in the State of California, Airstream, Inc. participates in the Consumer Arbitration Program for Recreation Vehicles (CAP-RV). This third-party dispute resolution program is available, at no charge to you, to settle unresolved warranty disputes for recreation vehicles. This dispute resolution program reviews eligible product and service related complaints involving warranty covered components. To find out more about this program, or to request an application/brochure, please call the Arbitration Administration office toll-free 800.279.5343. The CAP-RV program operates as a certified mechanism under the review of the California Arbitration Certification Program. Members of the armed forces who purchased the vehicle in California, or who were stationed in or a resident of California at the time of purchase (regardless of state of purchase) or who are stationed in California at the time of application to this program may utilize the CAP-RV program.

EVENTS THAT DISCHARGE AIRSTREAM'S OBLIGATIONS UNDER THIS LIMITED WARRANTY: Damage Caused by collision, fire, theft, vandalism, explosions, overloading in excess of rated capacities, odometer tampering, and use of the motorhome for commercial, business, or rental purposes shall discharge Airstream from any express or implied warranty obligation.

LEGAL REMEDIES: EXCLUSIVE JURISDICTION FOR DECIDING LEGAL DISPUTES RELATING TO THE ALLEGED BREACH OF EXPRESS WARRANTY AND BREACH OF IMPLIED WARRANTIES ARISING BY OPERATION OF LAW AS WELL AS THOSE RELATING TO REPRESENTATIONS OF ANY NATURE RESTS IN THE COURTS WITHIN THE STATE OF MANUFACTURE, WHICH IS OHIO. ALSO, THIS WARRANTY SHALL BE INTERPRETED AND CONSTRUED IN ACCORDANCE WITH THE LAWS OF THE STATE OF OHIO. ANY AND ALL CLAIMS, CONTROVERSIES, AND CAUSES OF ACTION ARISING OUT OF OR RELATING TO THIS WARRANTY, WHETHER SOUNDING CONTRACT, TORT OR STATUTE, SHALL BE GOVERNED BY THE LAWS OF THE STATE OF OHIO, INCLUDING ITS STATUTE OF LIMITATIONS, WITHOUT GIVING EFFECT TO ANY CONFLICT OF LAW RULE THAT WOULD RESULT IN THE APPLICATION OF THE LAWS OF A DIFFERENT JURISDICTION. IF STATE LAW GIVES YOU ADDITIONAL RIGHTS THAT CONFLICT WITH ANY TERM OF THIS WARRANTY, YOUR STATE LAW APPLIES OVER INCONSISTENT WARRANTY TERMS. For example, if you took delivery of your RV in California, the Song Beverly Warranty Act and Consumers Legal Remedies Act apply because they cannot be waived.

I AGREE THAT ANY AND ALL ACTIONS OF ANY KIND RELATED TO MY MOTORHOME SHALL BE DECIDED BY A JUDGE RATHER THAN BY A JURY. THIS JURY WAIVER MAY NOT APPLY TO YOU IF APPLICABLE OR PROVINCIAL LAW PROHIBITS A WAIVER OF A JURY TRIAL. For example, if you took delivery in California, your right to a jury cannot be waived.

CALIFORNIA CONSUMERS: To comply with California's Song Beverly Consumer Warranty Act pre-litigation notice requirements (described at California Code of Civil Procedure Section 871.24), written notice can be sent to Airstream, Inc., either by email sent to the following email address: support@airstream.com, or by certified or registered mail, return receipt requested, sent to the following address: Airstream, Inc., 428 West Pike Street, P.O. Box 629, Jackson Center, Ohio 45334-0629, Attention: Owner Relations Department.

CONSUMIDORES DE CALIFORNIA: Para cumplir con los requisitos de notificación previa al litigio de la Ley de Garantía del Consumidor Song Beverly de California (descritos en la Sección 871.24 del Código de Procedimiento Civil de California), se puede enviar una notificación por escrito a Airstream, Inc., ya sea por correo electrónico a la siguiente dirección de correo electrónico: support@airstream.com, o por correo certificado o registrado, con acuse de recibo, enviado a la siguiente dirección: Airstream, Inc., 428 West Pike Street, P.O. Box 629, Jackson Center, Ohio 45334-0629, Attention: Owner Relations Department.

Before I purchased my motorhome, I received, read, and agreed to the terms and conditions of this Limited Warranty. I understand and agree that the selling dealership is not an agent for Airstream but is an independent entity. I understand and acknowledge items of the WHAT IS NOT COVERED section of this Limited Warranty. I acknowledge and agree that, before purchasing my motorhome, I inspected or was given an opportunity to inspect my motorhome and disclosed in writing to the selling dealership all defects and damage that I discovered during my test drive. For example, I inspected the underside of the RV for rust and did not discover any unless disclosed in writing to the selling dealership.

Purchaser Signature

Date

Purchaser Signature

Date

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.
AIRSTREAM, INC • 1001 West Pike Street • Jackson Center, Ohio 45334-0629 • Phone: 937-596-6111 • FAX: 937-596-6539

Sprinter Van Information

Airstream, Inc., does not accept any responsibility in connection with any of its touring coach's for the Sprinter Van or its components. The Sprinter Van and its components are covered by Mercedes-Benz Warranties as explained by Sprinter literature provided. Your Sprinter Van and its components are pre-checked by its manufacturer before delivery to Airstream. All service to the Sprinter Van and its components must be performed by Mercedes-Benz Sprinter designated service points according to the manufacturer's warranty and service policies. The literature provided with each touring coach gives important information concerning its warranty coverage, maintenance, and operation.

The Airstream Atlas Owner's Manual may provide additional information and tips on the use of the van as a touring coach, however, no information, in whole or in part, in any Airstream manual should be interpreted as advice or directions to disregard or void the Warnings, Cautions, Notices, or other information contained in the Sprinter's manuals.

⚠ WARNING

Your Mercedes-Benz Sprinter Van Operator's and Warranty Manuals contain important cautions, warnings, operational, and warranty information on the Sprinter and its components. All information in the Sprinter manual should be reviewed and followed for your safety.

Service

Coach-Net® Roadside Assistance



Every new Airstream comes with a one-year, transferable subscription to Coach-Net which includes a long list of premium services to help quickly solve issues or learn about your Airstream.

To learn more, scan the QR code above, navigate to <https://www.airstream.com/owners/coach-net/>, or call Coach-Net at 855-817-1885. On-call technicians are always ready to answer questions.

Service Centers

Before leaving the factory, every vital part of the touring coach is tested for performance. Each test is signed and certified by an inspector. After the touring coach arrives on your dealer's lot, all vital parts and systems are again tested. When you take delivery of your new touring coach, you will receive a complete check out.

At that time, a specified list of performance checks on your touring coach equipment will be conducted, and any deficiencies you have experienced since taking delivery will be corrected.

Please contact your dealer if your touring coach needs service. Major service under your Airstream Limited Warranty is available through our nationwide network of Airstream Dealer Service Centers. To find a dealer, please visit, <https://www.airstream.com> to use our dealer locator.

Occasionally, dealerships change, or new dealers are added that may not appear on the website immediately. Please note that all centers operate on an appointment basis for the utmost efficiency.

When you require service for your touring coach from the Airstream Factory Service Center or a Certified Dealer Service Center, please contact the service manager for an appointment, and inform them if you are unable to keep the appointment date or wish to change it. Service may be arranged at the Factory Service Center by contacting the Service Coordinator at:

Airstream Factory Service Center

428 West Pike Street

P.O. Box 629

Jackson Center, Ohio 45334-0629

Phone: (937) 596-6111 or (877) 596-6111

NOTE

Connected RV features and systems may be turned off while in a service facility for the safety of our technicians. You might have to re-pair your personal device after service appointment.

General Information

Reporting Safety Defects

If you believe your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform the National Highway Traffic Safety Administration (NHTSA), in addition to notifying Airstream, Inc.

If NHTSA receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your dealer, or Airstream Inc.

To contact NHTSA, you may either call the Vehicle Safety Hotline toll-free at 1-888-327-4236 (TTY: 1-800-424-9153), go to <https://www.nhtsa.gov>, or write to:

Administrator

NHTSA

1200 New Jersey Avenue, S.E.

Washington, DC 20590

For additional information about motor vehicle safety visit <https://www.nhtsa.gov>.

Camping

Suggested Pre-Travel Check List

Exterior

1. Verify power cord is stored.
2. Verify water and sewer hoses are stored.
3. Double check all hitch connections (if towing).
4. Look under, over, and around the vehicle for any overlooked items.
5. Ensure all exterior compartments are closed and latched.
6. Check exterior lighting.
7. Check torque of wheel bolts or lug nuts
8. Check tires for correct pressure.

Interior

1. Turn off water pump and heater/hot water system.
2. Close windows and vents.
3. Close all interior cabinet doors.
4. Latch refrigerator door. (Seal containers first.)
5. Latch microwave.
6. Secure, stow, and latch for travel anything that will move, fall, fly, or open.
7. Drain toilet bowl.
8. Turn off 12-volt lights.

Touring Coach Equipment and Accessories

1. Water hose, 5/8-in. high-pressure, tasteless, odorless, non-toxic (two 25-ft. sections).
2. Y connection - water hose.
3. Holding tank cleaner and deodorizer.
4. Power cord adapter, 15 amp - 30-amp.
5. 30-ft. electric cord, 30-amp capacity.
6. Wheel chocks.
7. Torque wrench.
8. Quality tire gauge.
9. Emergency light and first aid kits.

Motoring Essentials

1. Touring coach registration.
2. Carry driver's license.
3. In Canada, bring along a non-residence liability insurance card and your passport.
4. In Mexico, you must have special auto insurance.
5. Carry an extra set of the ignition keys in a separate pocket or in your wallet.
6. Keep an operating flashlight with fresh batteries in the glove compartment.
7. Carry your pet's dish, food, leash, and health and registration papers.

Overnight Stop

In time you will develop a knack for spotting wonderful little roadside locations by turning off the main highway and exploring. There are many modern recreational vehicle parks, including State, County, and Federal parks with good facilities, where you may obtain electrical, water, and sewer hookups and connections. Directories are published which describe in detail these parks and tell what is available in the way of services and hookups.

All you need to do to enjoy the self-contained luxury while boondocking is to:

1. Turn on the Battery Power switch (battery disconnect switch) to provide power to your components.
2. Inverter will need to be turned on to power the entertainment devices. To conserve battery power, turn off the inverter when not in use.
3. Turn on the water pump and open faucets until air is expelled from the system.

Before moving on, turn off the water pump and the heating/hot water system. Check your campsite, both for cleanliness and to be sure you have not left anything behind. Make sure everything is properly stowed.

Overnight or Weekend Trips

On overnight or weekend trips, chances are you will not use up the capacity of the holding tanks. Deplete the water supply, if using the system moderately or conservatively. You will need to maintain the level of your battery during longer periods of battery use, and when the State-of-Charge (SOC) is low.

Longer Trips

On a longer trip, when you have stayed where sewer connections and utility hookups were not available, it will be necessary for you to stop from time to time to dispose of the waste in the holding tank and replenish the water supply. Many truck stops and gas stations, chain and individually owned, have installed sanitary dumping stations for just this purpose. Booklets are available that list these facilities.

When you stop for the night, your Airstream Touring Coach is built to be safely parked in any spot that is relatively level and where the ground is firm. Your facilities are with you. You are self-contained. Try to pick as level a parking spot as possible.

Extended Stay

Making a long trip is not very different from making a weekend excursion. Since everything you need is right at hand, you are at home wherever you go. When packing for an extended trip, take everything you need, but only what you need.

Hook up to water by attaching a ½ -inch minimum high-pressure water hose to the city water service.

Connect to external power when available; [see Shoreline Power Inlet and Cordset on page 6-8](#).

Connect to any external service provider for entertainment, [see Entertainment Systems on page 5-18](#).

When you stay for extended periods where electric or water hookups are not available, you must make regular checks on State-of-Charge of your battery and the contents of your water tank. Carry drinking water in a clean bucket to refill your tank. When your waste tank nears capacity, move your touring coach to a dumping location.

Leveling

When you plan to park and enjoy the features of your coach, it needs to be as level as possible.

Select an area that is as firm and level as possible. Most campgrounds provide this type of parking. For instructions on how to operate the Optional Leveling System; [see Optional Hydraulic Leveling System on page 6-9](#).

Airstream does not recommend placing tires in a hole for leveling. Check the tire section of the chassis portion of this manual for information on tire support; [see Tires on page 7-4](#).

Effects of Prolonged Occupancy

Your touring coach was designed primarily for recreational use and short-term occupancy. If you expect to occupy the touring coach for an extended period, be prepared to deal with condensation and the humid conditions that may be encountered. The relatively small volume and tight compact construction of modern recreation vehicles mean that the normal living activities of even a few occupants will lead to rapid moisture saturation of the air contained in the touring coach and the appearance of visible moisture, especially in cold weather.

Just as moisture collects on the outside of a glass of cold water during humid weather, moisture can condense on the inside surfaces of the touring coach during cold weather when relative humidity of the interior air is high. This condition is increased because the insulated walls of a recreation vehicle are much thinner than house walls. Estimates indicate that two adults can vaporize up to one-and-a-half gallons of water daily through breathing, cooking, bathing, and washing. Unless the water vapor is carried outside by ventilation or condensed by a dehumidifier, it will condense on the inside of the windows and walls as moisture, or in cold weather as frost or ice. It may also condense out of sight within the walls or the ceiling where it will manifest itself as warped or stained panels. Appearance of these conditions may indicate a serious condensation problem. When you recognize the signs of excessive moisture and condensation in the touring coach, action should be taken to minimize their effects.

NOTICE

Your touring coach is not designed, nor intended, for permanent housing. Use of this product for long term or permanent occupancy may lead to premature deterioration of structure, interior finishes, fabrics, carpeting, and drapes. Damage or deterioration due to long-term occupancy may not be considered normal, and may under the terms of the warranty constitute misuse, abuse, or neglect, and may therefore reduce the warranty protection.

To avoid condensation problems, try to follow these tips to help alleviate excess moisture:

- Allow excess moisture to escape to the outside when bathing, washing dishes, hair drying, laundering, and using appliances. Always use an exhaust fan when cooking.
- Keep the bathroom door closed and the vent or window open when bathing and for a period of time after you have finished.
- If you are experiencing condensation, you may want to reconsider hanging wet clothes in the touring coach to dry.
- In hot weather, start the AC early as it removes excess humidity from the air while lowering the temperature.
- Keep the temperature as reasonably cool during cold weather as possible. The warmer the vehicle, the more cold exterior temperatures and warm interior temperatures will collide on wall surfaces, thus creating condensation.
- Use the ceiling vent to keep air circulating inside the vehicle so condensation and mildew cannot form in dead air spaces. Allow air to circulate inside closets and cabinets (leave doors partially open). Please keep in mind that a closed cabinet full of stored goods prevents circulation and allows the exterior temperature to cause condensation.
- The natural tendency would be to close the vehicle tightly during cold weather. This will actually compound the problem. Simply put, you need to remove some of the warm air and allow some cool outside air to get inside the vehicle so the furnace will not recycle the humid interior air.
- Minimize the use of incandescent lights, which produce heat and contribute to condensation.

About Molds

What are molds

Molds are microscopic organisms that naturally occur in virtually every environment, indoors and out. Outdoors, mold growth is important in the decomposition of plants. Indoors, mold growth is unfavorable. Left unchecked, molds break down natural materials, such as wood products and fabrics. Knowing the potential risks is important for any type of homeowner to protect their investment.

What factors contribute to mold growth

For mold growth to occur, temperatures, indoor or outdoors, must be between 40°F and 100°F and, there must be a source of moisture, such as humidity, standing water, damp materials, etc. Indoors, the most rapid growth occurs with warm and humid conditions.

How can mold growth be inhibited

By controlling relative humidity, the growth of mold and mildew can be inhibited. In warm climates, use of the air conditioner will reduce the relative humidity. Vents are located in the bathing and cooking areas and constant use is advised during food preparation and bathing, even during colder weather. Additionally, opening a window during these activities will assist in ventilation. In extremely humid conditions, the use of a dehumidifier can be helpful. If using a dehumidifier, please read and follow all manufacturer instructions and recommendations to the use and cleaning of the dehumidifier.

Frequent use of your touring coach or cleaning regularly is an important preventive measure. Further, any spills should be wiped up quickly and dried as soon as possible. Avoid leaving damp items lying about. On safe surfaces, use mold or mildew killing cleaning products. Check sealants regularly, and reseal when necessary to avoid water leaks. Proper preventive maintenance to the touring coach and its accessories, as described both in this manual and in accompanying literature, will provide the best protection to the touring coach.

Wastewater System

The main parts of the wastewater system are the toilet, holding tanks, and tank dump valves; [see Drain and Waste System on page 9-6](#). The system is designed to provide complete self-contained toilet facilities, while on the road or parked, without being connected to a sewage line. It may also be used when parked while connected to a sewage hose.

Keep the dump valves closed with either method and empty the tanks when they are nearly full. The idea is to send a large volume of water through the tanks and hose at the same time to float solids away.

After the sewage tank has been emptied, close the dump valves and charge the tank by putting a few gallons of water in the sewage holding tank using the waste tank flush inlet. This will spray the interior of the tank with water and help prevent solids from building up in the sewage holding tank. The addition of a deodorizing agent like Aqua-Kem will help prevent odors.


Should you ever have a buildup of solids, close the valves, fill the tanks about 3/4 full with fresh water, drive a distance to agitate the solids, and drain the tanks.

Things Not to Put into Toilet or Drains

- Facial tissues and feminine hygiene products (they do not dissolve like toilet paper).
- Automotive antifreeze, ammonia, alcohols, or acetone.
- Table scraps or other solids that may clog the drains.

General Information

Drain System

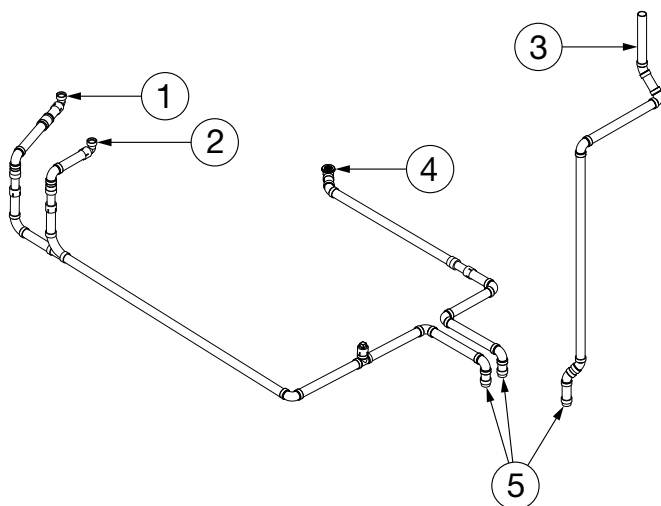

1. Galley Drain
2. Lavatory Drain
3. Waste Tank Vent
4. Shower Drain
5. Holding Tank Connections

Winter Traveling

Traveling in sub-freezing temperatures will require certain precautions to protect the plumbing system and your personal belongings from being damaged by freezing.

While traveling, simply use your common sense. How cold is it? How long will it be before you can turn the heat back on? Is the temperature dropping or rising? Remember, when driving at 50 MPH, the wind chill factor will cause the interior of the touring coach to cool much faster than a touring coach that is parked.

1. You must have at least 1/4 tank of fuel to run the hydronic heating/hot water system as the heat from the furnace warms the touring coach and keeps the fresh water lines and waste water holding tank from freezing. If your fuel tank drops below 1/4 tank, the hydronic system will automatically shut off. This 1/4 tank reserve is so you can travel to refuel.
2. If your stay is longer than overnight, you should endeavor to have a shoreline hookup.
3. Minimize use of electricity if 120-volt power source is not available.

4. Leave cabinet doors, wet bath doors, and wardrobe doors slightly open at night to allow circulation of air in and around all components.
5. Save power by using non-toxic RV- approved antifreeze in the gray water holding tank instead of the heating pad to prevent freezing. Quantity of antifreeze needed will vary with ambient temperature and the amount of liquids in tank.
6. For extended stays in cold weather, insulate all water lines outside the touring coach. You should remember that low temperatures in combination with high winds cause an equivalent chill temperature much below what your thermometer is reading. For instance, with an outside temperature of zero degrees, and the wind velocity of 10 miles per hour, the equivalent chill temperature is -20°F.
7. Remember to remove and drain the exterior shower faucet to prevent freeze damage.

Heated Tanks

The Atlas Touring Coach has 12-volt heat pads installed with the fresh water, gray water, and waste water holding tanks to help prevent freezing. The tank heaters are controlled using the Multiplex system; [see Multiplex System on page 5-16](#). When the outside temperature is near freezing, simply switch "ON" the holding tank heaters. Built-in sensors will activate the heat pads when the contents of the tank drops to 44°F. Once the liquid is heated and rises to 64°F the heat pads will automatically deactivate. Switch the power "OFF" when the ambient outside temperature remains above freezing or the tanks are empty. The tank heaters will eventually deplete the house battery unless the unit is plugged into an external power source. To conserve battery power, RV antifreeze may be used to protect the gray and waste tanks.

NOTICE

Drain and winterize all models if the water systems are not being used during winter traveling; [see Winterizing and Storage on page 9-8](#).

AIRSTREAM®

Section 4 FLOOR PLANS AND SPECIFICATIONS

FLOOR PLANS	4-2
Tommy Bahama Atlas 25RT	4-2
SPECIFICATIONS	4-3
Tommy Bahama Atlas 25RT Specifications	4-3
Specifications Definitions	4-4
Specifications Labels	4-4
Occupant and Cargo Carrying Capacity Label	4-4
Tire and Loading Placard	4-4
Manufacturer's Certification Label	4-4

Floor Plans And Specifications

Floor Plans

Tommy Bahama Atlas 25RT



Specifications

Tommy Bahama Atlas 25RT Specifications	
Chassis	Mercedes-Benz® Sprinter 4500 RWD
Engine	Mercedes-Benz® 2.0L Turbo Charged High Output 4-Cylinder Diesel
Horsepower/Torque	208HP/332 lb-ft Torque
Transmission	9G-Tronic, 9 Speed Automatic Transmission
Emissions	BlueTEC SCR Technology, 50 State – EPA/CARB Standards
Wheelbase	170"
MPG ^[1]	16-18 Estimated Highway
Exterior Overall Length	24' 9"
Exterior Overall Height with A/C and Antenna	10' 6"
Exterior Overall Width w/Mirrors	9' 1.5"
Interior Height	6' 6"
Interior Width	7' 4.5"
GVWR ^[2]	12,125 lbs
GCWR ^[2]	15,250 lbs
UVW/UBW ^[2]	Weights are listed on the OCCC Label and Tire and Loading Placard; for more information, see Specifications Labels on page 4-4
OCCC ^[2]	
Tow Capacity/Tongue Weight ^[3]	Up To 5,000 lbs/500 lb tongue weight
Fuel Tank	24.5 gallon
Fresh Water Tank	23 gallon
Gray Water Tank	31 gallon
Waste Water Tank	27 gallon
Hydronic Heating/Hot Water System	Diesel Fired/120V AC Element Support
Air conditioner	15,000 BTU
Refrigerator w/Freezer (12V)	6.6 cubic feet
Microwave	.7 cubic feet
Cooktop	1,000 Watt, Single burner, Induction
House Batteries, Advanced Power	2 – 12 Volt 270 Ah LiFePO4 batteries w/Built-in Heater (6.9kWh)
House Batteries, Advanced Power Plus (OPTIONAL)	5 – 12 Volt 270 Ah LiFePO4 batteries w/Built-in Heater (17.2kWh)
Inverter/Converter	3,000 Watt Pure Sine Inverter/130A Multi-Stage Charger
Shore Power	30-Amp/120-Volt Service
Solar Power (OPTIONAL)	400 Watts
Bed Size (Rear Twin)	76" X 33"
Wheel Fastener Torque Value ^[4]	133 ft-lbs
Tire Size / Max Cold Inflation Pressure ^{[2][5]}	Tire size and max cold inflation pressure are listed on the Tire and Loading Placard on the B-pillar (driver's door jamb); For more information, see Tire and Loading Placard on page 4-4
Airstream Limited Warranty	2 Years
Mercedes-Benz® Chassis Warranty	5 Years/75,000 Miles
Mercedes-Benz® Engine & Drive Train Warranty	5 Years/100,000 Miles

1. Actual mileage will vary based on load carrying, driving style, and road conditions.

2. For more information, [see Specifications Definitions on page 4-4](#) and [see Specifications Labels on page 4-4](#).

3. Tow capacity will vary with build spec and intended vehicle loading with people, cargo, and fluids.

4. For safety reasons, wheel fastener torque must be checked immediately after reinstalling wheels and again after 30 miles.

5. In this context, cold refers to how long a tire has sat idle. *Max cold inflation pressure* should be checked in the morning (after sitting idle for at least three hours) before driving more than one mile or before rising ambient temperatures and the sun's radiant heat can affect tire pressure.

Floor Plans And Specifications

Specifications Definitions

Unloaded Vehicle Weight (UVW) or Unit Base Weight (UBW) is the factory manufactured/empty weight of the touring coach. UVW includes fuel, engine operating fluids, and all batteries; *UVW is listed as "factory manufactured weight" on the Tire and Loading Placard.*

Gross Combined Vehicle Weight Rating (GCWR) is the maximum weight rating of the vehicle with a trailer attached; *GCWR is listed on the previous page.*

Gross Axle Weight Rating (GAWR) is the value specified as the load carrying capacity of a single axle system, as measured at the tire-ground interfaces. This is the maximum amount of weight that can be placed on each axle; *GAWR is listed on the Manufacturer's Certification Label.*

Gross Vehicular Weight Rating (GVWR) is the maximum permissible weight of the Touring Coach when fully loaded; *GVWR is listed on the Tire and Loading Placard and Manufacturer's Certification Label. It is also listed on the previous page.*

Occupant and Cargo Carrying Capacity (OCCC) is the maximum total weight of all occupants, cargo, fresh water, and any tongue weight of a towed trailer; *OCCC is listed on the OCCC label and Tire and Loading Placard.*

GVWR - UVW = OCCC

⚠ WARNING

The combined weight of occupants and cargo should never exceed the limit on OCCC label.

⚠ WARNING

Wheel fastener torque must be checked immediately after reinstalling a wheel and again after 30 miles. Torque all wheel fasteners evenly to specification using the proper sequence; [see Wheel Bolt/Lug Nut Tightening on page 7-8](#). For torque values, [see Specifications on page 4-3](#).

NOTE

All product information and specifications listed are as accurate as possible at the time of printing. Since we continually strive to improve our products, all specifications are subject to change without notice.

NOTE

Specifications labels shown are examples only.

Specifications Labels

Occupant and Cargo Carrying Capacity Label

MOTOR HOME OCCUPANT CARGO CARRYING CAPACITY
VIN: XXXXXXXXXXXXXXXX
THE COMBINED WEIGHT OF OCCUPANTS AND CARGO SHOULD NEVER EXCEED
XXX kg OR XXX LBS
Safety belts equipped seating capacity: X
CAUTION:
A full load of water equals XX kg or XXX lbs of cargo @ 1kg/L (8.3lb/gal) and the tongue weight of a towed trailer counts as cargo.
Motor Home overall length XXX (XXX cm) as manufactured

The Occupant and Cargo Carrying Capacity Label on the edge of the passenger door lists the VIN, OCCC, safety belt equipped seating capacity, the weight of a full load of water, and the motorhome's overall length.

Tire and Loading Placard

TIRE AND LOADING INFORMATION
RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT

The combined weight of occupants and cargo should never exceed XXX kg or XXXX lbs.

SEATING CAPACITY TOTAL X FRONT X REAR X

TIRE PNEU	SIZE DIMENSIONS	COLD TIRE PRESSURE PRESSION DES PNEUS A FROID
FRONT AVANT	XXXXXXXXXX	XXX kpa (XX Psi)
REAR ARRIERE	XXXXXXXXXX	XXX kpa (XX Psi)
SPARE DE SECOURS	XXXXXXXXXX	XXX kpa (XX Psi)

SEE OWNERS MANUAL FOR ADDITIONAL INFORMATION
VOIR LE MANUEL DE L'USAGER POUR PLUS DE RENSEIGNEMENTS

XXXXX

The factory manufactured weight of this motor home is XXXX kgs XXXX (lbs).
The GVWR of this motor home is XXXX kgs XXXX (lbs).

The Tire and Loading Placard on the B-pillar (driver's door jamb) lists OCCC, UVW, GVWR, seating capacity, tire size, tire cold inflation pressure, and the last six digits of the serial number.

Manufacturer's Certification Label

MANUFACTURED BY : AIRSTREAM, INC

GVWR:	XXXX kg/	XXXX lb	DATE: XXXXXXXX	XXX
GAWR	TIRES	RIMS	COLD INFL.PRESS.	
FRONT	XXXXXXXXXX	XXXX	XXX KPA	SINGLE ☐
XXXX KG/ XXX LB			XX PSI	DUAL ☐
INTERM				SINGLE ☐
			PSI	DUAL ☐
REAR	XXXXXXXXXX	XXXX	XXX KPA	SINGLE ☐
XXXX KG/ XXX LB			XX PSI	DUAL ☐

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE ALL WEIGHTS ARE APPROXIMATE

V.I.N./N.I.V.:XXXXXXXXXXXXXXXXXX TYPE/TYPE: XXXXXXXX MODEL: XXXXXX
XXXXXXXXXXXXXXXXXX XX XXX Serial: XXXXXXXXXXXXXXXX

The Manufacturer's Certification Label on the driver's seat pedestal lists the GVWR, GAWR, date of manufacture, tire size, rim size, tire cold inflation pressure, VIN/NIV number, vehicle type, model, and the full serial number.

AIRSTREAM®

Section 5 INTERIOR

GENERAL INFORMATION AND CLEANING . . .	5-3	ELECTRICAL SYSTEM OVERVIEW	5-7
Upholstery	5-3	Power Center	5-7
Cabinets and Overhead Lockers	5-3	Circuit Breaker Protection	5-7
Aluminum Interior Skin	5-3	Ground Fault Circuit Interrupter (GFCI) . .	5-7
Countertop Areas	5-4	GFCI Breaker Test	5-8
Sink Cover, Bottle Holder, and Countertop Items	5-4	Power Center Fuses	5-8
Luxury Woven Vinyl Floor	5-4	Auxiliary Fuse Locations	5-8
Interior Doormat and Rug Selection	5-4	120 volt System	5-8
Privacy Sun Shades	5-4	City Power Overview	5-8
Shower and Showerhead	5-5	Outlets and USB ports	5-8
Toilet	5-5	12 volt System	5-9
Deodorizers and Biological Chemicals . .	5-5	Overview.	5-9
Sink and Faucet Care	5-5	Undercarriage Electrical Components	5-9
Twin Beds and Privacy Doors	5-6	Optional Solar System	5-9
Storage	5-6	Lighting	5-9
Driver and Passenger Seats	5-6		
Articulating Table	5-6		

Section 5 Interior

ELECTRICAL SYSTEM OPERATION	.5-10	ENTERTAINMENT SYSTEMS	.5-18
Battery Disconnect Switch	.5-10	Bedroom TV	.5-18
Energy Management System (EMS)	.5-10	Lounge TV Pre-Wire	.5-18
Inverter/Charger	.5-11	Bluetooth Pairing Hub	.5-18
Charging from a Residential Outlet	.5-11	Subwoofer.	.5-18
House Battery Pack	.5-12	TV Antenna	.5-18
Battery Management System (BMS)	.5-12	Cable TV Hookup & Outdoor Viewing Setup .5-18	
High Voltage Disconnect	.5-12	Connecting to Cable or Satellite.	.5-18
Low-Voltage Disconnect.	.5-13	Setting Up an Outdoor TV	.5-19
Temperature Limits.	.5-13	Switching Between Cable and Antenna . .5-19	
Battery Heaters	.5-13	Starlink Internet/WiFi Pre-Wire	.5-19
Battery Management and Charging	.5-14	Starlink Antenna Care and Heater	
Battery Monitoring/State of Charge (SOC).5-14		Function	.5-19
Charging via Shoreline Connection	.5-14	Airstream Connected RV Antenna Pre-Wire. .5-19	
DC-DC Charger, REDARC Alpha	.5-15	APPLIANCES	.5-20
Charging via Solar Power (If Equipped). .5-15		Maintenance	.5-20
Charging via Secondary Alternator.	.5-15	Rooftop Air Conditioner/Heat Pump	.5-20
Multiplex System	.5-16	Cooktop.	.5-20
Overview.	.5-16	Ceiling Vent Fan	.5-21
Android System Navigation	.5-16	Operation	.5-21
Garmin RV Controls App	.5-16	Ceiling Fan Mode	.5-21
Multiplex System Navigation	.5-17	Cleaning Instructions	.5-21
Home Page.	.5-17	Exhaust Vent	.5-21
Lighting Page	.5-17	Operation	.5-21
Climate Page	.5-17	Hydronic Heating and Hot Water System . .5-22	
Cleaning the Multiplex Touchscreens. . .5-17		Operation	.5-22
Service-Access Control Panels	.5-17	Maintenance	.5-22
		Microwave Oven	.5-22
		Refrigerator	.5-22

General Information and Cleaning

The interior of every Airstream is crafted with features that offer comfort, convenience, functionality, durability, and design appeal. Our goal in this section is to deliver the best experience possible by providing you with the knowledge you need to enjoy these features and care for them to ensure their longevity.

 Airstream Supply Company is your trusted source to obtain care products and supplies to help maintain and enjoy your Airstream. Scan this QR code to visit and explore our recommended assortment of RV care products and much more at airstreamsupplycompany.com.

Many of the appliances and components installed in your Airstream come with manuals from the manufacturers that produced them. These manuals provide detailed instructions and critical safety alerts that should be read and followed before operating them. If any manual(s) have not been provided in your owner's packet, contact your dealer, appliance or component manufacturer, or Airstream Customer Service at 937-596-6111 or email: support@airstream.com

Upholstery

Ultraleather requires regular cleaning to maintain its longevity and appearance. Quickly wipe up spills to prevent staining. Clean the surface regularly with a solution of mild soap and water, using a soft cloth or sponge. After cleaning, rinse thoroughly with clean water to remove any soap residue and allow the upholstery to air dry completely. To sanitize, use a disinfecting solution of one part bleach to five parts water. Apply it evenly with a soft cloth, then rinse thoroughly with clean water and let it air dry. For stubborn stains, clean the area with isopropyl alcohol using a soft cloth, testing first on an inconspicuous spot to ensure it does not damage the fabric. Always rinse the area with clean water after using alcohol; allow it to air dry.

Avoid harsh cleaners containing ammonia, alkalis, or solvents, as these can degrade the fabric and may void its warranty. Conditioners, protectants, or treatment products are not recommended, as they can alter the material's properties.

NOTICE

Never remove cushion covers for dry or machine cleaning as this will damage the upholstery fabric.

Cabinets and Overhead Lockers

The furniture is manufactured from a high-pressure laminate and can be cleaned with soap and water, or you can use a common solvent on tough spots. Furniture polish can be used sparingly. Plexiglass doors must be cleaned with a antistatic cleaner and cloth. Windex or common ammonia products will damage the coating on the surface. Do not use abrasive materials or cleaners.

Aluminum Interior Skin

The metal interior skin on the ceiling is coated with a baked-on acrylic coating. Use soft rags or wash mitts always moving lengthwise with the grain of the aluminum. NEVER rub hard on the coating. Oil, grease, dust, and dirt may be removed by washing with a 5 percent solution of commonly used commercial and industrial multi-purpose detergent in water. Cleaning should be followed by a thorough clean water rinse. Drying the metal with a chamois or a soft cloth may prevent spots and streaks. When washing or waxing the metal, always wipe "with" the grain of the metal. A good grade of nonabrasive automotive paste or liquid wax once a year will increase the life of the finish.

NOTICE

Abrasive polishes or cleaning solvents such as automatic dishwasher or acid etch cleaners are too strong and should never be used. Rinse all grit from surface prior to washing. Use soft rags always moving lengthwise with the unit. NEVER rub with excessive pressure on the coating. Even the softest rag will damage the coating if excessive pressure is applied.

Countertop Areas

The solid surface countertops only require everyday cleaning with a damp cloth or sponge. Dry with a soft cloth or paper towel to prevent spotting. Basic stains can be cleaned with an ammonia-based product such as household glass cleaner or non-abrasive spray-on cleaners for solid surface products. More stubborn stains can be removed by spraying a non-abrasive product such as Formula 409® over the stain and wait for a couple minutes. Scrub in small circular motions with a wet sponge followed by a rinse with clean water and drying with a soft cloth or paper towel. Avoid exposing the counter tops to strong chemicals such as paint removers, acetone, and oven cleaners. Promptly rinse, with water, spots that may have come in contact with these types of cleaners. A protective pad should always be used under hot utensils or pans.

Sink Cover, Bottle Holder, and Countertop Items

Remove and stow the sink cover and any loose countertop items in a cabinet prior to travel. Bottles or other items placed in the bottle holder must also be removed before driving; the holder is not intended to secure loose items during transit.

⚠ WARNING

Stow the sink cover, all bottles, and any other loose items before travel. Unsecured items can shift during transit, causing injury, damage to the vehicle interior, or contributing to a vehicle accident.

Luxury Woven Vinyl Floor

Maintaining the appearance and longevity of your Luxury Woven Vinyl Flooring requires regular cleaning and proper care. To remove loose dirt and debris, sweep the floor with a broom or use a vacuum with the beater bar turned off. For routine cleaning, mop with clean water or a mild soap solution, such as diluted dish soap, but avoid oversaturating the floor, especially around cabinets. Apply the solution with a soft-bristle brush or mop, gently cleaning the surface. Rinse thoroughly with clean water to remove any soap residue, then allow the floor to air dry completely.

For stubborn stains or mildew, mix 1 cup of bleach and 1/4 cup of mild soap per gallon of water. Apply a small amount to the affected area and blot with a sponge or clean towel. Rinse thoroughly to remove all residue, then let the floor air dry. Alternatively, a citrus-based cleaner like D-Limonene can be effective for tough dirt and grease spots. Always rinse off all cleaning products thoroughly and allow the floor to air dry after cleaning.

NOTICE

Protect the area around your flooring if using a bleach solution. The use of certain cleaning agents, including but not limited to powdered abrasives, solvents, and industrial strength cleaners is not recommended. Always follow the manufacturer's instructions. Check that the cleaner/polish is suitable for use with cushioned vinyl floor coverings.

Interior Doormat and Rug Selection

To avoid staining or discoloration of vinyl flooring, only use doormats or rugs made of natural fibers.

NOTICE

Rubber or latex-backed mats or furniture with rubber feet may stain or discolor vinyl flooring.

Privacy Sun Shades

Privacy shades are provided for the front windshield and driver/passenger cab windows. The shades have magnets sewn into them that attach to the van.

Light brushing with an upholstery brush or gentle use of a vacuum cleaner will suffice in most situations. For heavy soiled conditions dry clean only. Washing the shades may void the warranty.

Shower and Showerhead

The showerhead facilitates water-saving when camping without a fresh water hookup. To conserve water while showering with fresh tank water, turn the water off between lathering and rinsing.

For cleaning, wet the shower surface and use a non-abrasive sponge or soft cloth and a non-abrasive liquid detergent cleaner safe for acrylic, gel coat, and fiberglass bath surfaces. Avoid using acidic or harsh commercial bath cleaners. Rinse and dry with a soft towel. A wax or sealer suitable for these surfaces can be applied to the stall to restore gloss to dull areas when necessary, but should not be used on the shower floor as this could create an unsafe, slippery surface.

WARNING

Applying wax to the shower floor is not recommended and could create an unsafe, slippery surface.

Toilet

 Before using the macerator toilet, read the manufacturer's instructions included in your owner's packet. The manual provides detailed information on operating the control panel, including understanding LED notifications and audible alerts, as well as performing troubleshooting, cleaning, and maintenance. If the manual was not provided, scan the QR code above or visit <https://www.sanimarin.com> to download a copy.

A macerator toilet uses a motor and cutting blades to grind solid waste and toilet paper during flushing. The following is a basic overview of how to prepare and operate the toilet using the bathroom wall-mounted control panel. To begin using the toilet, ensure its water valve is open to supply fresh water and press the NORMAL button. Perform several flush cycles with fresh water to prepare the bowl for use.

The control panel has three buttons used to activate and empty the bowl:

NORMAL - Flushes solids and toilet paper.

ECO - Flushes liquids and small amounts of toilet paper.

EMPTY - Removes water from the bowl. Press until empty (a small amount of water will remain; this is normal).

NOTICE

Empty the bowl before travel to reduce the risk of water splashing from the bowl while the motorhome is in motion.

CAUTION

Failure to monitor holding tank levels shown on the multiplex panel, or heed control panel alerts and LED notifications on the toilet's control panel, may result in wastewater overflow.

NOTICE

Only water, sewage, and rapid-dissolving toilet tissue should be flushed. Other materials can damage the macerator and cause clogging which may void the toilet warranty.

Deodorizers and Biological Chemicals

There are many deodorizers and processing chemicals on the market in tablet, liquid, and powder form. These not only combat odor, but also stimulate the bacteria that works to dissolve the solids and tissues in your waste tank. These chemicals should be introduced through the toilet prior to use per the manufacturers directions. It's also important to always add a few gallons of water by filling the toilet bowl a few times and depressing the foot pedal.

Sink and Faucet Care

To clean sinks and faucets, dampen a soft cloth with warm water and a small amount of mild liquid soap or detergent. Gently wipe down all surfaces, then rinse with clean water and dry with a soft cloth. Avoid abrasive scrubbing sponges, steel wool, scouring powders, and harsh chemical cleaners, as these can damage or dull the protective finishes on sinks and faucets. Using gentle cleaning methods helps preserve the appearance and integrity of the materials. For best results, wipe down sinks and faucets after each use to prevent water spots, soap residue, and grime from accumulating.

Avoid leaving cookware in the sink, especially metal like cast iron, as it can cause stains and scratches. Depending on the sink and faucet manufacturer, additional care instructions may be included in your owner's packet.

Interior

Twin Beds and Privacy Doors

 The Airstream Supply Company is your trusted source for custom bedding options. Scan this  QR code to visit airstreamsupplycompany.com to obtain items like custom-fit sheets, mattress pads, encasements, memory foam toppers, and even custom-fit replacement mattresses, made to order to your preferred level of firmness, support, and comfort.

For additional privacy, the bath and shower doors can be opened and positioned to separate the bath and lavatory areas, as well as the sleeping area, from the front of the coach.

Storage

The large pass-through storage area, accessed from the doors on either side of the exterior, can also be accessed from the interior by lifting the top of the nightstand.

Latching hardware keeps doors and drawers secure while traveling. To open doors and drawers equipped with secure latching hardware, press the spring-loaded knob inward until it pops out to use as a pull. When closing, push the knob back into the recess until the mechanism latches.

Exercise caution when storing items in cubby spaces and other open storage areas as they could dislodge during travel. Heavy items could cause damage and even be dangerous should they dislodge while making sudden stops. Always secure cargo before travel. It is recommended to store heavier items in lower storage areas and lighter items overhead.

WARNING

Unsecured cargo can cause injury or lead to a vehicle accident and may damage the coach's interior should it become dislodged.

WARNING

Keep flammable material away from appliances with burners and do not block vents.

Driver and Passenger Seats



The driver and passenger seats provided by Sprinter are sent out to be recovered by Airstream to match the interior decor.

The seat adjustment mechanism provided by Sprinter allows the seat to be moved forward or backward and swivel left or right. Buttons near the door handle are used to move the seat forward and backward. Pressing down on the handle, centered under the front of the seats, allows the seat to swivel. Return the seat to the full upright position before using the swivel adjustment. The heated seats are activated by switches located on the door, next to the seat controls. For complete details on seat adjustments, please refer to the Sprinter manual.

Articulating Table

The table and leg assembly features quick-release adjustment handles that allow the table to be positioned for use and to be disassembled and stowed when not in use.

To adjust a handle, release its tension and loosen or tighten the threaded knob on the opposite side. When clamping tension is properly set, the handle will be tight when it is flush with the assembly.

The table can be attached to the mount at the base of the jump seat behind the driver seat and at the rear of the coach.

WARNING

The table should be removed from the mount and stowed prior travel.

Electrical System Overview

Power Center



The Power Center, under the roadside bed behind the forward cabinet door, is a self-contained 120-volt AC (120V AC) power distribution center used in RVs. It houses the coach's circuit breakers and fuses. Open the decorative

door to access the fuses and breakers.

Its primary function is to provide circuit protection for all 120V AC loads in the touring coach and is central to the overall electrical system. It distributes 120V AC power to the appliances and also supplies 120V AC to the converter, which transforms 120V AC to 12V DC to power the 12V DC systems.

The Power Center distributes incoming power from two sources: Shoreline power when connected to an external 120V AC power supply (city power) and the battery System (lithium-ion battery pack) via the 12V DC to 120V AC inverter.

⚠ WARNING

The power center is a centralized power switching, fusing, and distribution center. The potential of lethal electrical shock is present in this box. Inadvertent shorts at this box could result in damage and/or injury. All servicing of this box should be done by a qualified Service Technician.

Circuit Breaker Protection

Standard residential-style (resettable) circuit breakers provide circuit protection for all 120V AC loads. Airstream has installed breakers per RVIA (NEC) listing requirements for the touring coach. The 30 amp main breaker feeds individual branch breakers. The branch-breakers protect individual loads, which are identifiable by the affixed labels. Shutting off the main breaker will remove power to all branch loads.

A circuit breaker's ON/OFF switch function operates like a light switch: up is ON, and down is OFF. If an overload or short occurs, the breaker will snap to the OFF position to protect the connected circuit. As a result, any device running on the circuit will lose power. Before attempting to reset the breaker, consider the cause. If a connected device is faulty or uses a higher amperage than the circuit breaker's capacity, turn it off before resetting the breaker.

Before resetting the breaker, you need external AC power going to the breaker box. Firmly push the

breaker switch to the OFF position and back to the ON position. If the breaker snaps back to the OFF position while resetting, a fault condition still exists and should be serviced by a qualified Service Technician. Suppose the breaker stays ON but snaps back OFF after turning on a possibly faulty appliance. In that case, a fault condition may exist in that appliance that will require service by a qualified Technician.

Ground Fault Circuit Interrupter (GFCI)

Some outlets/receptacles on your Touring Coach are GFCI protected. The GFCI breaker provides reliable overload and short-circuit protection. GFCI breakers protect against ground faults and provide additional safety to the occupants of the touring coach on all outlets/receptacles. A ground fault occurs when current travels along an unintended path to ground, possibly through water or a person, which may result in an electric shock. The GFCI compares the amount of current going to and returning from the device plugged into the circuit's outlet/receptacle. When the amount of current going to the device differs from the amount returning, the GFCI interrupts the current within a fraction of a second, removing power from the circuit, and protecting the user.

Each GFCI circuit breaker is calibrated to trip with a ground current of 5 mA or more. Since most people can feel as little as 2 mA, a shock may be felt. The shock should be of such a short duration that the effects would be reduced, less than what would normally be a dangerous level. However, persons with acute heart problems or other conditions that can make a person particularly susceptible to electric shock may still be seriously injured.

While the GFCI circuit breaker affords a high degree of protection, there is no substitute for knowing that electricity can be dangerous when carelessly handled or used without reasonable caution.


The system incorporates GFCI breakers that implement an auto-self-test functionality. When turned off, these breakers require external AC power to be present before they can be turned back on. If power is present, and the breaker refuses to stay on, consult an electrician or certified RV technician.

⚠ WARNING

The GFCI circuit breaker will NOT reduce shock hazard if contact is made between a HOT load wire and a neutral wire or two HOT load wires. GFCI circuit breakers provide protection only to the circuit to which it is connected. It does NOT protect any other circuit.

GFCI Breaker Test

Perform this test on the GFCI circuit breaker each month and record the date.



1. With handle A in the “ON” position, press PUSH TO TEST button B.
2. Handle A should move to the TRIP position, indicating the GFCI breaker has opened the circuit.
3. Move handle A to the “OFF” position and back to the “ON” position to restore power.

If the device remains on when the Test button is pushed, the GFCI is not working properly or has been incorrectly installed (wired improperly). If your GFCI is not working properly, call a qualified, certified electrician who can assess the situation, rewire the GFCI if necessary, or replace the unit.

Power Center Fuses

The fuses housed in the power center will be illuminated by a blown-fuse LED indicator to help determine which fuse needs replacing. The indicator will only illuminate if the affected circuit remains closed and/or has a load. For example, suppose a light is burned-out or the switch to the light is off, resulting in an open circuit. In this case, the fuse will not illuminate.

NOTICE

Most fuses will require a qualified technician to access and replace. Contact your dealer or Airstream Service Center.

Auxiliary Fuse Locations

In addition to the 12-volt fuses and breakers located in the power center, several components of the coach are protected by in-line fuses. These are usually located at or near the components they protect. There are also several fuses located under the driver and passenger seats. For additional information, [see 12-Volt Main Schematic on page 9-12](#)

120 volt System

City Power Overview

120-volt AC shoreline power (city power) enters the coach through the SmartPlug cordset connection and is routed to the power distribution center and inverter/charger. The inverter/charger serves as a pass-through when connected to shore power, supplying 120V AC power to major appliances such as the electric element of the heating and hot water system, air conditioner, cooktop, microwave, and receptacles.

In addition to its pass-through function, the inverter plays a key role when off-grid (boondocking) by converting stored 12V DC battery power into 120V AC power, allowing appliances and outlets to function without shore power. However, the available power is dependent on battery capacity and charge level.

The Energy Management System (EMS) actively monitors power usage and sheds loads when to help prevent circuit overloads and breaker trips; [see Energy Management System \(EMS\) on page 5-10](#).

If an outlet or appliance is not working:

- Check the circuit breakers in your touring coach and at the shoreline connection.
- If a breaker trips repeatedly after being reset, the circuit may be overloaded or have a short.
- Reduce the number of devices running simultaneously to lessen the load on the circuit.
- If the issue persists, contact an Airstream Service Center for assistance.

Outlets and USB ports

Several receptacles/outlets and USB charging ports are located throughout your touring coach's interior. An additional receptacle can be found on the curbside exterior of the touring coach inside the forward utility compartment.

12 volt System

Overview

Your touring coach is equipped with a house battery system designed for extended use and reliable power management. The system supports most power needs, and if upgraded to the 5-battery system, will support extended power needs. For detailed information on your specific setup; [see House Battery Pack on page 5-12](#).

Supporting the battery system is an inverter/charger that provides continuous pure sine wave power and includes a battery charger for efficient lithium battery charging; [see Inverter/Charger on page 5-11](#). Also supporting the battery system is a secondary alternator and regulator, which supplements the vehicle's primary alternator by providing high-output charging to rapidly replenish the battery bank while driving; [see Charging via Secondary Alternator on page 5-15](#). Additionally, if equipped, solar panels contribute to battery maintenance, reducing reliance on other charging sources.

State of Charge (SOC) is the primary concern when using only battery power from the onboard battery pack. With the exception of 120V AC appliances and outlets, everything runs on 12V DC power (some appliances still require 12V DC power to operate).

Power is routed from the house battery pack to the 12V DC distribution panel and through its branch circuits to the rest of the touring coach. All 12V current is routed to a 12V DC fuse block, which then distributes power to a busbar holding Type 2 thermal breakers. These breakers supply power to various electrical components throughout the touring coach.

⚠ CAUTION

Type 2 thermal breakers automatically reset once they cool down after tripping due to overheating from an overload or short circuit. If a breaker repeatedly overheats and trips, it should be inspected by a qualified service technician to diagnose the underlying issue.

NOTE

The engine battery and house battery are isolated from each other, preventing the two systems from drawing down simultaneously.

Undercarriage Electrical Components

Some features of the electrical system, including the optional battery pack when installed, are mounted to the undercarriage. While these areas are protected from normal road debris and water infiltration from normal operation, they are not submersible.

NOTICE

It is imperative that you do not allow any part of your touring coach to be submerged in water as it could cause damage to electrical components that a warranty would not cover.

Optional Solar System

If equipped, the rooftop solar panels on your Airstream help maintain the charge and extend the life of both the house and chassis batteries. To maximize solar charging efficiency, keep the panels clean and free from shade caused by trees or structures that might obstruct sunlight. For more information on solar power, [see DC-DC Charger, REDARC Alpha on page 5-15](#) and [see Solar Ports on page 6-9](#).

Lighting

All lighting requires the battery disconnect switch to be turned on; [see Battery Disconnect Switch on page 5-10](#). Lighting is primarily controlled from the multiplex system control panels; [see Lighting Page on page 5-17](#). Some lights have switches on the wall or ceiling near the light, or a switch mounted directly to the light.

Electrical System Operation

⚠ WARNING

This manual provides an overview of the electrical system, its components, and basic operation. For detailed instructions, refer to the electrical component manufacturers' manuals in your Airstream Owner's Packet. It is important to review all manufacturer instructions and safety notifications before using the system.

Battery Disconnect Switch

The battery disconnect (MAIN DISC) switch is located just inside the main entry door. To enable the 12-volt system and use most of the onboard systems inside your touring coach, you will need to turn the battery disconnect ON. Even when connected to shore power, the switch must be ON to enable the multiplex system.

The battery disconnect switch isolates the house batteries from the 12-volt distribution panel and charging system. The house and chassis batteries will continue to charge from shore power, the alternator, and solar panels (if equipped) even if the battery disconnect switch is turned OFF.

When not connected to an external power source, turning the switch OFF disconnects the house batteries, cutting off all 12-volt power, except the battery heaters, which can still be manually activated with the dedicated key switch; [see Battery Heaters on page 5-13](#).

It is recommended to turn the battery disconnect switch OFF during long-term storage or when conserving battery power while the coach is not in use.

Energy Management System (EMS)



The Energy Management System (EMS) monitors and regulates 120-volt power usage, automatically managing appliances to prevent circuit overloads. It ensures that total current draw stays within the user-selected shore power service limit, reducing the risk of tripped breakers.

The control display is in the cabinet above the refrigerator. By default, the system starts in 30A mode when power is supplied. Pressing **SELECT** allows the user to cycle between service modes to match available shore power. For example, a standard home outlet typically provides 15A service, requiring the user to select the corresponding mode. Campgrounds often provide full 30A service, allowing the system to operate at maximum capacity. In addition to changing this setting, [see Charging from a Residential Outlet on page 5-11](#). Pressing **SCROLL** cycles through system information, including total power usage, available service type, and currently shed appliances.

When 120V AC and 12V DC power are supplied, the system gradually energizes each EMS load control relay, allowing power to flow to connected appliances while monitoring total power consumption. If usage exceeds the service limit, the EMS will automatically shed (remove power from) appliances in the following order:

- 1 Electric heating element (heating/hot water system)
- 2 Air conditioner
- 3 Cooktop
- 4 Microwave

As each load is shed, the system calculates and stores the reduction in power demand, learning the power draw of each appliance and adjusting for voltage and temperature variations to improve accuracy.

Once power consumption drops below the limit and remains stable for at least two minutes, the EMS will automatically restore power to the shed appliances in reverse order (microwave first, then cooktop, etc.).

Inverter/Charger

Your touring coach is equipped with a Xantrex Freedom XC Pro inverter/charger which is located under the roadside bed and is accessible through a panel beneath the mattress. It is controlled through the multiplex system and via the Xantrex FXC Control App. The inverter/charger also includes a primary control panel installed for system access and diagnostics; [see Service-Access Control Panels on page 5-17](#).



The Xantrex Freedom FXC Control App enables monitoring and management from a connected device. To learn more or download the app, scan the QR code, visit your app store, or go to the manufacturer's website at <https://xantrex.com> and navigate to the product page. If viewing a digital version of this manual, click one of the icons below. Additional component instructions may be included in your Airstream Owner's Packet.



NOTICE

Airstream calibrates all settings at the factory and recommends adjustments not be made.

The inverter/charger functions as a pass-through, automatically directing 120V AC shore power to the onboard electrical system to operate appliances such as the electric element of the heating and hot water system, air conditioner, cooktop, microwave, and 120V receptacles. When shore power is unavailable, the inverter converts DC power from the house batteries into 120V AC electricity to run these same systems. Additionally, the charger converts 120V AC power into 12V DC to recharge the house batteries and supply power to the 12V DC system.

NOTE

Even when not using 120V AC power, the inverter will draw a small amount of power if left on. To conserve battery power, turn the inverter off when not in use. Overloading the inverter will cause an automatic shutoff to activate. Removing the load will allow the inverter to reset.

Charging from a Residential Outlet

Before connecting to a residential outlet, use the Xantrex Freedom FXC Control App to adjust the charger's "breaker rating" to 15A, or to the available service amperage.

Most standard residential outlets provide 15A service. If the charger's breaker rating is set above this, it may overload the residential circuit and trip a breaker. Also select the appropriate service mode for the EMS when operating appliances. For more information, [see Energy Management System \(EMS\) on page 5-10](#).

House Battery Pack

Based on your selected configuration, your Airstream came from the factory with one of the following options:

- A battery pack consisting of two 270 Ah Battle Born Gamechanger LiFePO₄ (Lithium Iron Phosphate) batteries, providing a total capacity of 6.9 kWh and housed in the curbside compartment behind the rear wheels; or
- The original two-battery pack with an additional three 270 Ah batteries mounted on the rear undercarriage, for a total of five 270 Ah batteries and 17.2 kWh of power.

If your Airstream was delivered with only the two-battery pack, it can be upgraded later to the higher-capacity configuration through an authorized Airstream dealer.

The battery area/compartment is designed for use with non-vented batteries only. Do not install batteries that require venting in this area/compartment. Failure to follow these instructions can result in fire, explosion, serious injury, or death. The following warning label is affixed in multiple locations on or near the battery system.

⚠ WARNING

The battery area/compartment is designed for the use of non-vented batteries only. Do not place a battery that requires venting into this area/compartment. Vented batteries can release poisonous and flammable gases. Can lead to a fire or explosion and result in death or serious injury.

⚠ WARNING

For detailed information regarding your lithium batteries, refer to the Battle Born documentation in your Airstream Owner's Packet. It is essential to review all manufacturer instructions, safety guidelines, and warnings before operating or servicing the battery system.



The following is an overview of the type of batteries installed in your Airstream and the battery management system. Please read the Battle Born Gamechanger 3.0 manual (in your Owner's Packet) to learn more about using and maintaining the batteries. For additional information, scan the QR code above to visit <https://battlebornbatteries.com/> and navigate to the Gamechanger 3.0 information page.

A full discharge and recharge of the battery defines a cycle. The number of cycles a lithium-ion battery can sustain varies depending on its usage. A battery that is consistently discharged to only 50% SOC will have more cycles than a battery that is frequently discharged to 0% SOC. To learn about battery about charging options, [see Battery Management and Charging on page 5-14.](#)

Battery Management System (BMS)

The BMS is an internal component of the battery and is crucial to ensuring safe operation. The BMS monitors cell voltages, currents, and temperatures to ensure they operate in a safe range and will shut the battery down should any faults occur. The following are features of the BMS:

- Over/under voltage protection
- High current protection/short circuit
- High-temperature protection
- Low-temperature charging protection
- Cell balancing

High Voltage Disconnect

If an individual cell voltage exceeds a prescribed threshold during charging (approx. 14.7V), the BMS will prevent a charge current from continuing. Discharge is always allowed under this condition.

NOTICE

Even though the BMS will protect against issues from overcharging, it should be avoided. The recommended specs are 14.2-14.6 bulk/absorb and below 13.8 float.

NOTE

If the battery has not been balanced for a long period, a high voltage disconnect could occur at a lower voltage. The battery will rebalance after several full charges.

Low-Voltage Disconnect

If an individual battery cell falls below a prescribed threshold during discharge (approximately 10.5V), the Battery Management System (BMS) will prevent further discharge to protect the battery. If this occurs, you can wake the battery by connecting the coach to external power using the shoreline power cord or by driving the vehicle, which allows the alternator to charge the battery. Bringing a battery out of low-voltage disconnect only wakes it, enabling it to accept a charge. However, without an active charging source such as shore power or alternator charging, the battery may return to low-voltage disconnect.

NOTICE

The manufacturer states you should charge (wake) your battery within 24 hours of entering low-voltage disconnect; otherwise, you risk damaging the battery and voiding the warranty.

Temperature Limits

- The battery has an operating temperature range of -4°F (-20°C) to 135°F (57.2°C).
- The BMS will not allow a charging current under 25°F (-3.9°C) but will continue to discharge down to -4°F (-20°C).
- The BMS will not allow a charging or discharging current if the internal temperature of the battery has reached 135°F (57.2°C)

Battery Heaters

The house batteries are equipped with internal heaters to maintain optimal performance in cold conditions and to facilitate charging by keeping the battery temperature above the threshold at which the Battery Management System (BMS) prevents charging. These heaters are controlled by a key switch located next to the Power Center, under the roadside bed behind the forward cabinet door. The battery disconnect does not need to be turned on for the heaters to function.

It's important to note that the BMS will prevent charging if the battery's internal temperature drops below 25°F (-3.9°C). When the key switch is turned on, the heaters automatically engage below 35°F and disengage above 45°F, maintaining a safe charging range. The key switch can generally remain on and requires no user input during normal use. It should only be turned off during long-term storage (3 months or more) when the unit isn't plugged in, to prevent battery over-discharge from heater draw.

NOTE

The BMS will not allow a charging current if the internal temperature is below 25°F, and it will not allow charging or discharging current above 135°F.

NOTE

If the battery is in low-voltage disconnect mode and the battery temperature is below 35°F, the heat function will need some time to warm the battery before performing the wake-up procedure.

Battery Management and Charging

Battery Monitoring/State of Charge (SOC)

Battery State of Charge (SOC) can be viewed on the multiplex display panel and from the Garmin® RV Controls App.

If inverter use is extensive, the house battery will deplete much quicker. Even when not using 120V AC power, the inverter will draw a small amount of power if left on. When not in use, turn the inverter off to conserve battery power.

If you plan on staying longer without access to a charge or plans to drive and charge from the alternator, you will want to conserve your battery power by using as few lights and appliances as possible. The two most significant loads on the battery are heating and cooling. The more these systems run, the more energy consumption. Consider reducing the temperature on the thermostat when using the heater and increasing the temperature on the thermostat when using the air conditioner.



SOC information is made available by the equipped Victron Energy SmartShunt, an advanced battery monitor that measures and communicates key battery parameters.

If desired, the SmartShunt can be connected via Bluetooth to the VictronConnect app on a connected device, allowing you to monitor real-time data such as SOC, voltage, current, power consumption, and estimated remaining battery life.

To learn more or download the app, scan the QR code above, visit your app store, or go to the manufacturer's website at <http://www.victronenergy.com> and navigate to the product page. If viewing a digital version of this manual, click one of the icons below. Additional component instructions may be included in your Airstream Owner's Packet.

Use the code 000000 to sign up



Charging via Shoreline Connection

Plug the SmartPlug Cordset (shoreline power cord) into an external shoreline power supply (city power). Check that the cordset LED indicator light is ON, then plug the other end into the coach's roadside SmartPlug inlet. For more information about establishing a safe shoreline connection, at home or away, [see Shoreline Power Inlet and Cordset on page 6-8](#).

Next, select the appropriate service mode to match available shore power; [see Energy Management System \(EMS\) on page 5-10](#).

NOTE

Residential Outlets - To charge from a residential outlet, you must set the charger's "breaker rating" to 15A, or to the available service amperage; [see Charging from a Residential Outlet on page 5-11](#).

The amount of time it takes to charge the batteries depends on a variety of factors, including available shore power amperage, state of charge of the batteries, efficiency of the onboard charger, ambient temperature, and any power usage within the coach. Higher amperage shore power connections (such as 30A service) allow for faster shore charging while lower amperage connections (such as 15A) will extend charge times. Additionally, extreme cold or heat can affect lithium battery charging efficiency.

DC-DC Charger, REDARC Alpha

The REDARC BCDC Alpha, DC-to-DC charger, charges the house battery pack using available solar power (if equipped), supplementing with power from the chassis battery as needed. It is located under the roadside bed and is accessible through a panel beneath the mattress.

Once the house battery is fully charged, excess solar energy is directed to the chassis battery. The unit operates automatically, requiring no user interaction, and draws from the chassis battery only when necessary and only while the engine is running, minimizing alternator load and maximizing solar energy use. Built-in isolation prevents the house batteries from draining the chassis battery when the vehicle is not running.



 The charger also includes a Start Battery Recovery feature—a function that resembles a jump-start—safely supplying a bulk charge to the chassis battery to help get the vehicle running again if the chassis battery is depleted. This can be initiated remotely via the RedVision® app. Refer to the REDARC Alpha manual and RedVision app for complete details. To learn more or download the app, scan the QR code above, visit your app store, or go to the manufacturer's website at <https://www.redarcelectronics.com/us/> and navigate to the product page. If viewing a digital version of this manual, click one of the icons above.

Charging via Solar Power (If Equipped)

To maximize efficiency, ensure the solar panels remain clean and unobstructed by trees or structures that could block sunlight. For information on how solar charge is managed, see [DC-DC Charger, REDARC Alpha on page 5-15](#). Your Airstream includes solar ports for connecting portable panels, allowing flexibility in different use scenarios; see [Solar Ports on page 6-9](#).

Charging via Secondary Alternator

Your Airstream is equipped with a secondary alternator that charges automatically while driving, with no user interaction required. This alternator supplements the vehicle's primary alternator, providing high-output charging to quickly replenish the house battery bank.

 The secondary alternator features a high-energy external Bluetooth regulator, which can be monitored and optimized using the ARCO Zeus app. This system enhances charging efficiency, especially during extended trips, ensuring that you have ample power reserves for off-grid use. To learn more or download the app, scan the QR code above, visit your app store, or go to the manufacturer's website at <https://arcomarine.com> and navigate to the product page. If viewing a digital version of this manual, click one of the icons below. Additional component instructions may be included in your Airstream Owner's Packet.



The app features Generator Mode, capable of delivering up to 3,000W of idle charging under certain conditions. This feature allows battery replenishment even when stationary. However, prolonged idling is not recommended, as it increases fuel consumption and engine wear.

Best Practices for Optimal Performance:


- Allow the alternator to naturally charge the battery bank while driving.
- Use generator mode only when necessary and avoid extended idling.
- Monitor system performance using the ARCO Zeus app, which provides real-time system data and charge optimization.

NOTICE

While generator mode provides significant power, prolonged idling is not recommended by Airstream or Mercedes-Benz (refer to your vehicle Owner's Manual). Do not park and rev the engine, as this may cause engine damage and could void your Mercedes-Benz warranty.

Multiplex System

Overview

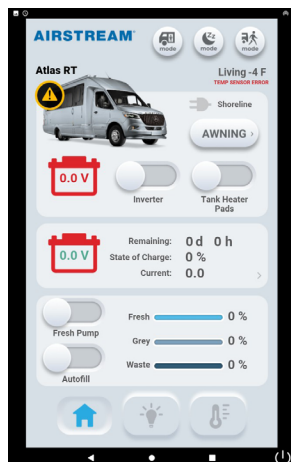

The multiplex touchscreen displays run on an Android operating system and function similar to an Android phone or tablet. The Garmin® RV Controls app, installed on each touchscreen display (shown open here), provides the interface you use to view, monitor, and operate your Airstream's features.

The app can also be installed on your smartphone and used to control and monitor

features when you are within range of the Multiplex System's Wi-Fi access point.

Android System Navigation

Swipe up from the bottom of the screen to reveal the Android system navigation bar. To avoid activating on-screen icons, swipe up near the left edge of the screen. Users familiar with Android devices will recognize the layout:

	Back - Returns to the previous screen
	Device Home - Returns to the home screen
	Recent Apps - Displays recently opened apps
	Sleep - Tap the screen to wake

Tap to access apps installed on the device. Select the Settings Gear Icon to access system settings including: accesibility, date and time, brightness, screen timeout options, screen cleaning mode, as well as other key feaures.

NOTICE

You may encounter Warning screens when entering settings. Some Changes will affect functions of the touchscreens and your touring coach and should only be accessed by a technician trained on this system.

To return to the Garmin® RV Controls app tap and select the Airstream logo on the home screen, or—if you are viewing the App Tray (displays all installed apps)—select the Garmin® RV Controls app icon.

There are limited apps installed on the displays and it is unlikely you will interact with them unless directed to do so by your Airstream dealer or Airstream Customer Service.

NOTICE

The system's Wi-Fi connectvity (not to be confused with the Wi-Fi access point used to connect your phone) is primarily for service and support technicians. It is not necessary to enable Wi-Fi to operate the system. Do not attempt to connect the Multiplex System to a Wi-Fi router if it is already connected via Ethernet (LAN) to an internet service provider. Activating both Wi-Fi and Ethernet simultaneously will cause the multiplex system to malfunction.

NOTICE

Owners should never need to reset the system. If any displays are not operating, contact your Airstream dealer or Airstream Customer Service.

Garmin RV Controls App



To connect your smartphone and control the Multiplex System when you are within range of the system's Wi-Fi access point, follow these steps:

1. Download the Garmin® RV Controls app from your app store and leave the app closed until the steps below are complete.
2. On the Multiplex touchscreen, swipe up from the bottom of the screen to reveal the Android navigation bar. Tap on the navigation bar.
3. Select the Settings Gear Icon > Vehicle Integration > Access Point Settings > and tap on the hidden password to reveal the Wi-Fi password.
4. Open Wi-Fi settings on your smartphone, select the Garmin device from the list of networks, and enter the Wi-Fi password.
5. Open the app on your phone and select the Airstream icon.

Multiplex System Navigation

The Multiplex System (Garmin® RV Controls app) has three main pages: the Home page, Lighting page, and Climate Control page. Icons for each page are located at the bottom of the screen. Simply tap an icon to navigate to the page you want.

Home Page

The Home page provides quick access to frequently used functions, along with real-time readings of tank levels and the status of major onboard systems.

Customer Support: Tap **AIRSTREAM** to reach the help section, where you can find contact information for Airstream Customer Service and scan a QR code (also found on the cover of this manual) to access Airstream Support, where you can view model-specific User Guide Videos covering topics in this manual.

Modes: Set and activate one of the three automated coach mode functions: Onboard, Sleep, and Offboard. To set which items are automated when activating a mode, press and hold the icon. A pop-up will open so you can choose the items you want automated. Tap the desired mode icon to activate it.

Alerts: When a condition requires attention, an alert symbol will appear. Tap the symbol to view additional information, which may help you address the issue or provide useful details for your Airstream dealer or Airstream Customer Service when troubleshooting or making service recommendations.

⚠ CAUTION

Warning alarms have been incorporated into the Multiplex System to indicate possible hazards. These alarms include: cabin door lock, cabin door open, luggage door locks, chassis battery voltage, and folding step. If an alarm sounds, check the Multiplex display for a warning notification before proceeding.

Monitoring and Control Features: View the current state of the chassis battery, house battery, and holding tank levels all from the Home page. Enabling features and turning devices on or off requires only tapping their icons. Some features, such as the awning, reveal a pop-up when pressed. Tapping the house battery information box displays more detailed power information.

Lighting Page

Icons with a “–” and “+” indicator can be pressed and held to access a pop-up dimmer to adjust lighting to the desired level. Icons without dimmer capability can be touched once to turn the light on or off.

The Master ON/OFF function allows you to control which lights turn on or off when pressing the master icons. Press the word **Master** to open the pop-up menu and select the lights you want it to control. The Master feature has memory and will control lights according to the setup you’ve configured.

Climate Page

The Climate Page provides controls for both the rooftop air conditioner with heat pump and the Elwell/Timberline hydronic heating and hot water system. For more information, [see Rooftop Air Conditioner/Heat Pump on page 5-20](#), and, [see Hydronic Heating and Hot Water System on page 5-22](#).

Cleaning the Multiplex Touchscreens

To clean the glass surface of the touchscreens, power down the system, then gently wipe the screen with a soft, slightly damp cloth using only minimal amounts of water or a mild lens cleaner. Ensure the display is fully dry before powering the system back on.

If you prefer not to power down the system, the Settings menu includes a screen cleaning feature. When activated, the screen is temporarily frozen to allow cleaning, and a countdown timer is displayed.

NOTICE

The components of the multiplex system must not be exposed to liquids or moisture of any kind. The only approved exception is cleaning the glass surface of the touchscreens.

Service-Access Control Panels

There are several control/display panels located behind an access panel in the cabinet above the refrigerator. These are the primary control panels for their respective systems but are typically not used by the owner, as system operation is handled through the multiplex touchscreens. Dealer access may be required for service and troubleshooting of the Elwell Timberline hydronic heating and hot water system, SeeLevel monitor, and Xantrex inverter/charger system.

Entertainment Systems

Your Airstream is equipped with a Bluetooth® enabled Smart TV and a Bluetooth pairing hub to play sound from a connected device. This setup lets you play TV audio through the sound system and pair the TV with Bluetooth-enabled headphones or a portable speaker.

Bedroom TV

Please refer to the TV manual in your owner's packet for additional details. Some TV's also have manuals available through the on-screen menu.

To pair the desired Bluetooth audio component (stereo/headphones/portable speaker) with your Airstream's TV, place the audio component into pairing mode. Then, enter the TV's settings menu and follow the prompts to select the desired Bluetooth device from the device list.

Blu-ray/DVD players and streaming devices can be connected to the TV via an HDMI connection in the rooflocker above the front seats. Internet access is required for streaming devices; [see Starlink Internet/WiFi Pre-Wire on page 5-19](#).

The TV has an articulating arm and can be adjusted for viewing angle. Pull the strap on the bottom of the TV bracket to release the arm and make adjustments.

Lounge TV Pre-Wire

The side of the refrigerator cabinet is pre-wired to connect a TV. Contact your Airstream dealer for details and installation.

Bluetooth Pairing Hub



The JBL unit, in the cabinet above the refrigerator, lets you stream and control audio from a connected device, such as the onboard TV or your smartphone, via Bluetooth.

Bluetooth: Power on the JBL head unit and press the Bluetooth button. On your device, select "JBL" or a similar name from the pairing list.

USB: The unit also has a USB-C port for direct device connection. Power on the head unit and plug your device into the USB-C port on the front. The unit will automatically switch to USB mode and start playback. Disconnect the USB to allow Bluetooth connection.

Subwoofer

A dedicated volume control is installed in the cabinet above the refrigerator. Use the control to raise or lower the subwoofer to the desired volume.

TV Antenna



The roof-mounted TV antenna receives free Local VHF/UHF TV signals. The signal is boosted to maximize signal strength and provide TV reception.

The antenna booster is controlled by a switch on the antenna booster's wall plate inside the roof locker area above the passenger seat. Press the small pushbutton on the wall plate to turn **ON** the booster. An LED indicator will illuminate to show the booster is active. To view cable or satellite, you will need to turn it **OFF**.

The antenna is constructed of durable automotive-grade plastic that is UV-protected, weatherproof, and capable of withstanding outdoor climates. Clean the antenna with mild soap and water only. Do not powerwash or use harsh cleaning solutions, solvents, or alcohol to clean the antenna or antenna base.

Cable TV Hookup & Outdoor Viewing Setup

Connecting to Cable or Satellite

You can establish a cable or satellite connection by attaching a service provider's coax cable to the external coax cable inlet in the aft roadside compartment; [see Exterior Components on page 6-4](#).

Setting Up an Outdoor TV

For outdoor viewing, the forward curbside compartment includes a coax cable outlet, USB power supply, and HDMI port, allowing you to connect and set up a television outside; [see Exterior Components on page 6-4](#).

Switching Between Cable and Antenna

To view cable, turn **OFF** the antenna booster by pressing the small round pushbutton on the antenna booster's wall plate (located in the roof locker above the passenger seat). To return to viewing a boosted antenna signal, press the button **ON**.

Starlink Internet/WiFi Pre-Wire

 Your Airstream is pre-wired to receive a Starlink kit. Contact your Airstream dealer for details. Starlink provides Wi-Fi internet access while traveling to your destination and in locations where connectivity is unreliable or unavailable. For Starlink to function, the inverter must be on, or the coach must be connected to shoreline power.

NOTE

Starlink needs a clear view of the sky so it can stay connected with satellites as they move overhead. Objects that obstruct the connection between your Starlink and the satellite will cause service interruptions. For more information and to troubleshoot connectivity issues, refer to the Starlink app or the Starlink website. Additional resource materials may also be included in your Airstream Owner's packet.

To set up access and enroll in a Starlink subscription or download the app, scan the QR code above, visit your app store, or go to the manufacturer's website at <https://www.starlink.com> and navigate to the product page. If viewing a digital version of this manual, click one of the icons below.



Starlink Antenna Care and Heater Function

Once installed, clean the antenna with mild soap and water only. Avoid power washing or using harsh cleaning solutions, solvents, or alcohol.

Starlink's in-motion phased array antenna has a built-in heater that activates based on temperature and signal loss, melting any ice or snow that could cause interference. If the signal is lost, the heater may turn on even without ice or snow, and in warmer weather.

When using only inverter power (boondocking), the heater will draw power from the battery. It can be turned off in the Starlink app to conserve battery power, but Starlink will still function as long as the signal is strong. If you don't have the Starlink app, you can unplug the power cord inside the cabinet above the refrigerator to prevent the heater from activating.

Airstream Connected RV Antenna Pre-Wire

 Your Airstream is pre-wired for the aftermarket installation of a Connected RV high-gain multi-band antenna. This antenna, along with the Airstream router (sold separately), provides access to the Internet by creating a local area network. For more information, scan the QR code above or visit <https://www.airstream.com/connected/>. Stay connected to the amenities you demand with a boosted Wi-Fi signal or a dedicated 4G LTE-A internet service (requires data plan activation). Contact your preferred dealer's service department to schedule your installation.

NOTE

A data plan is required to activate the Connected RV features when purchasing an Airstream antenna and router. Instructions on setting up and data plans will be included with the router.

Appliances

The appliances installed in your Airstream typically include manuals provided by their respective manufacturers, which are often found in your owner's packet. If a manual didn't come with the appliance, the Certified Performance Checkout sheet in your owner's packet lists the manufacturer, model, and serial number for each appliance.

⚠ WARNING

Always read and follow each appliance manufacturer's instructions before use. Their manuals include critical safety information and guidance on proper use and maintenance.

The information contained in the appliance manuals supersedes any information contained in the Airstream Owner's Manual content on appliances. If you believe contradictory information on appliances is contained in this manual, or if any appliance manuals have not been provided with your Airstream, contact your dealer, the respective appliance manufacturer, or Airstream Customer Service at 937-596-6111 or email: support@airstream.com.

Maintenance

Follow the instructions and Warnings noted in the respective appliance and equipment owner's manuals.

Rooftop Air Conditioner/Heat Pump

While primarily designed for cooling, the rooftop air conditioner's integrated heat pump can draw warmth from the surrounding air to provide gentle heating, making it ideal for mild conditions when full furnace heat isn't needed.

All control features are accessed through the Multiplex System Climate Page, where you can adjust interior temperature and select heating or cooling options.

Your owner's packet includes literature with detailed operating and maintenance instructions. If misplaced, contact the A/C manufacturer or an Airstream dealer for a replacement copy.

Adequate voltage is essential for proper A/C operation. Some campground shoreline outlets may not provide sufficient power, particularly in older or poorly maintained parks, which can result in low voltage conditions. To help ensure reliable operation, park your touring coach as close as possible to the power source so the power cord plugs directly into a receptacle near the fuse or circuit breaker box. Avoid using extension

cords and adapters whenever possible. If an extension cord is necessary, use the shortest and heaviest gauge available to maintain proper power supply.

If high temperatures are expected, park in a shaded area when possible. Turning on the A/C early in the morning is also more efficient than cooling a hot interior later in the day. Maintaining a steady, comfortable temperature requires less energy than trying to lower the temperature after the space has already heated up.

NOTICE

Clean filters Weekly when A/C is in full use. Review the air conditioning literature supplied in your owner's packet before proceeding.

Cooktop

Your Airstream is equipped with a single-burner induction cooktop, which requires specific types of cookware to function properly. Unlike traditional cooktops, which use an open flame or electric element to heat the pan, an induction cooktop uses magnetic induction to generate an electrical current directly in the cookware. This causes the pan itself to heat up—rather than the cooktop surface—resulting in faster, more efficient cooking and improved temperature control.

Cookware must be made from a metal that responds to a magnetic field. Cast iron and most types of stainless steel are compatible. Other types of cookware, such as aluminum, will only work if specifically designed for induction use with a bonded layer that responds to a magnetic field.

To test if cookware is compatible, simply hold a magnet to the bottom. If the magnet sticks, the cookware should work with the induction cooktop.


⚠ WARNING

An operation manual for the range has been provided with your owner's packet. Their manual contains specialized warnings and cautions that should be reviewed prior to operating the appliance.

⚠ WARNING

Stow the cooktop, any sink cover, and all other countertop items prior to travel.

Ceiling Vent Fan

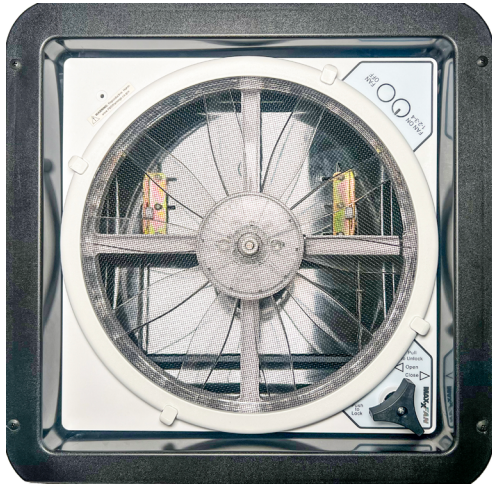

It is recommended to use the ceiling vent fan to remove hot air from inside the touring coach when the outside temperature does not require air conditioning or when cooking to remove smoke, steam, and other cooking fumes and odors. The ceiling vent fan can create a balanced airflow by opening a window during operation, allowing fresh air to be drawn in while hot, stuffy air is exhausted. The fan has a built-in rain cover that protects it from rain, whether the fan is on or off.

Operation

1. Pull down the knob to unlock the lid. Rotate the knob to open or close the vent. Push up on the knob to lock the lid.
2. Press FAN ON; continue pressing the button to cycle through the four fan speeds. Press FAN OFF to turn the fan off.

NOTE

The fan is designed to be fully opened or fully closed when the vehicle is moving.

Ceiling Fan Mode

With the fan motor running, close the lid to enter Ceiling Fan Mode. The fan will continue to run and circulate air.

Cleaning Instructions

1. Turn the fan motor off and remove power by turning off the battery disconnect.
2. Rotate the screen retainers to remove the screen.
3. Clean the screen with a mild soap and water solution, air dry, and reinstall.

⚠ CAUTION

Do not operate the fan with the screen removed as this could result in damage or injury.

NOTICE

Never place Lindeen™ or a similar cover over the ceiling fan. Greatly restricted airflow and increased sound levels will occur.

NOTICE

Do not use petroleum containing additives or solvent based products on any of the vent's components. The use of non-compatible chemicals will cause cracking and product failure.

Exhaust Vent



Operation

The bath exhaust vent removes moisture from the air when using the shower. To operate, you first need to open the vent by pushing upward on the handle. Once open, turn the fan on by pressing the ON/OFF button.

Turn the fan off before closing the vent. Pull down on the handle to close.

NOTICE

Turn off the fan before closing the vent. Damage to the motor can occur if the fan runs with the vent closed. Always close the vent prior to travel.

⚠ CAUTION

Do not operate the fan with the screen removed as this could result in damage or injury.

Hydronic Heating and Hot Water System

Your Touring Coach is equipped with a hydronic heating and hot water system. The system is powered by a fuel burner that draws from the vehicle's fuel tank and an electric heating element. The system will automatically shut off if the Coach's fuel tank reaches the one-quarter level, leaving enough fuel to travel to a refilling station.

⚠ DANGER

DO NOT run the burner (fuel feature) of the hydronic heating/hot water system in an enclosed building or a partly enclosed area such as a garage where exhaust fumes can accumulate and create unsafe conditions; see [Vehicle Engine and Fuel-Burning Appliance Exhaust](#) on page 2-5

⚠ WARNING

Carefully read all the manufacturer's instructions prior to operating. NEVER store flammable material in close proximity to the exhaust outlet on the side of the touring coach. Hot exhaust system components can cause burns if touched, even briefly.

NOTE

The system will automatically shut OFF if the Coach's fuel tank reaches the one-quarter level, leaving enough fuel to travel to a refilling station.

Operation

All control features are accessed through the Multiplex System Climate Page, where you can adjust interior temperature and select fuel (burner heat), electric heat, or both. Tapping on the Elwell icon opens a pop-out menu where some automated features can be set. The Timberline system also includes a primary control panel installed for system access and diagnostics; see [Service-Access Control Panels](#) on page 5-17.

The heating portion of the system circulates a heat transfer fluid (RV boiler antifreeze) through quiet air handlers to provide soft, radiant heat throughout the Coach.

When both burner and electric heat are selected, the system prioritizes electric heat. If heating demand exceeds the electric element's capacity, the burner automatically engages to supplement heat output.

When the interior is cold, the fans operate at higher speed until the target temperature is reached, then automatically slow to maintain comfort. The hot water portion of the system circulates the same heat transfer fluid through an instantaneous heat exchanger to provide hot water for showers and kitchen use.

For detailed information, maintenance requirements, and troubleshooting information, refer to the manual included in your Owner's Packet or visit <https://timberlineheat.com>.

Maintenance

The hydronic heating and hot water system requires periodic maintenance. The Timberline module is located under the roadside bed and is accessible through a panel beneath the mattress. The burner and exhaust are located curbside under the Coach, behind the rear compartment. Refer to the Timberline User Manual and, see [Maintenance Schedule](#) on page 9-2.

Microwave Oven

Depending on the manufacturer, Instructions may be included in your owner's packet. Refer to the Certified Performance Checkout sheet, included in your owner's packet, for manufacturer, model, and serial number information.

Refrigerator

The refrigerator requires 12V power to operate. You must have the battery disconnect switch ON, even if plugged into shore power. Refer to the instructions provided in your owner's packet, or inside the refrigerator, for operation, cleaning, defrosting, and maintenance. Refer to the Certified Performance Checkout sheet, included in your owner's packet, for manufacturer, model, and serial number information.

NOTICE

Speeding up the defrost process with a knife or scraper is strongly discouraged due to the likelihood of rupturing the refrigerant circuit.

AIRSTREAM®

Section 6 EXTERIOR

EXTERIOR CARE	6-2	EXTERIOR DOORS	.6-10
Painted Surface Care	6-2	Entry Door.	.6-10
Washing the Exterior	6-3	Screen Door	.6-10
Protecting the Exterior	6-3	Utility Compartment Doors	.6-10
Seam Sealant Inspection	6-3	Pass-through storage Compartment.	.6-10
EXTERIOR COMPONENTS	6-4	AWNING	.6-11
Roadside	6-4	Awning Use In Wind and Rain	.6-11
Curbside	6-5	Awning Manual Override	.6-11
EXTERIOR FEATURES	6-6	Awning Care and Maintenance.	.6-11
Body Kit.	6-6	HITCH COVER	.6-12
Windows	6-6	How To Remove The Hitch Cover.	.6-12
Exterior Shower/Sprayer Port	6-6		
City Water Hookup	6-7		
Exterior Folding Step	6-7		
Step Hold/Lock Extended Switch	6-7		
Receptacle, Cable, and USB Ports	6-8		
Shoreline Power Inlet and Cordset	6-8		
Taillights	6-8		
Solar Ports	6-9		
Optional Hydraulic Leveling System	6-9		
Leveling	6-9		

Exterior Care

 Airstream Supply Company is your trusted source for Airstream-approved cleaners, sealants, and other care products and supplies needed to properly maintain your Airstream's exterior. Scan this QR code to visit and explore our recommended assortment of RV care products and much more at airstreamsupplycompany.com.

Mercedes-Benz Sprinter painted the exterior of your Airstream before it arrived at the Airstream factory. The Airstream up-fitted and body kit portions were sent out and painted for Airstream during production.

⚠ WARNING

Your Sprinter Owner's Manual contains detailed cleaning and care instructions for painted surfaces and important safety information. Please read Sprinter's Cleaning and Care instructions before proceeding.

Airstream provides this section to help you understand the finish and its care. Following these instructions will help maintain your recreational vehicle's high-gloss finish.

⚠ WARNING

Information on finish care may provide additional information and tips on the use of the Sprinter Van as a touring coach, however, no information about the exterior finish of your touring coach in this manual should be interpreted as advice or directions to disregard or void the warnings, cautions, or other information contained in the Sprinter's manuals.

Painted Surface Care

The painted finish on your touring coach consists of a layer of acrylic urethane base coat paint (the pigmented application that provides the color) and a top layer of clear coat. The protective clear coat surface requires regular maintenance, especially in harsh environments where it is more susceptible to damage.

Clear coats lose gloss and appear to fade as environmental and road contaminants accumulate on the surface over time. Regular washing is necessary to keep the surface from being damaged by contaminants (like road salt). However, washing alone will not adequately remove all forms of contamination and does not provide clear coat protection.

To maintain and protect the longevity of the clear coat, the surface must be waxed or sealed periodically after washing. Waxes and sealers protect the top coat from damage caused by the accumulation of environmental contaminants like bugs, bird droppings, tree sap, acid rain, ultraviolet exposure, and moisture. They also protect against road contaminants like salt and tar and help prevent scratches, swirl marks, and chipping. As an added benefit, they enhance the appearance, improving resale value.

If the paint is chipped, it should be repaired with touch-up paint. If the base coat is exposed, it will deteriorate over time, and the exposed metal surface will eventually rust. Contact your Airstream dealer for the correct touch-up paint. Paint color codes can be found on a sticker on the driver's seat pedestal.

Clear coat surfaces that have not been well maintained can develop imperfections like oxidation, swirl marks, and scratches, which may require professional detailing (polishing). Detailing should only be accomplished by a qualified technician or professional detailer.

Washing the Exterior

Before you begin, verify that all vents and windows are closed. Ensure the touring coach's surface temperature is not too hot (under 90°F). Direct sunlight causes water and soap to evaporate quickly, resulting in water spots, so try to wash the coach in a shaded area. If only partially shaded, keep the vehicle wet by hosing it down occasionally.

Airstream recommends using microfiber wash mitts. Inspect the wash mitt each time you pull it from the bucket to ensure it hasn't picked up debris. It's good practice to use two mitts, one for the wheels and undercarriage and one for painted surfaces. Soft bristle brushes are acceptable for use on tires, wheel wells, but are not intended for use on painted surfaces.

Fill a clean bucket with warm water and mild soap or a car wash shampoo, which most auto parts stores and large retailers carry. Avoid combination wash-n-wax products, as these waxes may cause buildup and are better suited for smaller vehicles.

Working your way from the top down, start by thoroughly rinsing the entire vehicle with a hose to remove debris that could scratch the surface. Dip the wash mitt into the bucket, and without ringing it out, wash all surfaces, working your way from the top down, frequently rinsing to minimize grit abrasion. Follow with a final rinse of water.

Dry the surface and windows with a chamois or microfiber towels, working from the top down. Check for debris as you go, especially when working close to the ground. Open all the doors and wipe down the door jams, edges of the doors, and door seals. Drying and cleaning these areas can help prevent the buildup of contaminants that can hold moisture and cause rust on any vehicle. Keeping the seals and jams clean also provides a better surface for the doors to seal when closed. Finish by drying off the wheel rims and tires.

⚠ WARNING

Do not use a round spray nozzle when pressure washing. Doing so can cause unseen damage to tires and other critical vehicle components, which may cause them to fail unexpectedly. Maintain a proper distance of approximately 1 foot when using a 25° nozzle. Never point the jet nozzle at tires, moldings, hoses, electrical components, seals, plug connections, etc.

NOTICE

Do not use solvent-based cleaners. Refer to the Sprinter manual's cleaning section for products to use on tough spots like insects and tree resin.

NOTICE

Never use any abrasive pads, course brushes, or harsh/abrasive chemical cleaners especially those offered by most automatic car wash operations. Wheels should be cleaned after each exposure to harmful chemicals/materials.

Protecting the Exterior

Only apply waxes or sealants directly after washing the coach to ensure no dirt remains that could scratch the paint, and only apply waxes or sealers in a shaded area. Always follow the directions on the product label. Some product labels may recommend applying wax to the entire vehicle and letting it dry before removal. However, with the large surfaces of a touring coach, it is best to work in sections, applying the wax to a portion, letting it dry, and removing it before moving on to another section. Use a high-quality microfiber towel to remove wax. Turn the towel frequently. Check the towel for debris as you go, especially when working close to the ground. Remove dried polish from crevices, trim, and moldings when finished.

NOTICE

Rubbing or polishing compounds should only be applied by experienced technicians.


Seam Sealant Inspection

It is recommended that the caulking and sealant used in external seams and joints, such as window frames, light bezels, beltline, rub-rail molding, etc., be checked regularly. If this material has dried out or cracked, or if a portion has fallen out, it should be replaced with fresh material to prevent possible rain leaks. Caulking and sealing products are available from your touring coach dealer, most RV supply stores, and Airstream Supply Company.

Exterior

Exterior Components

Roadside

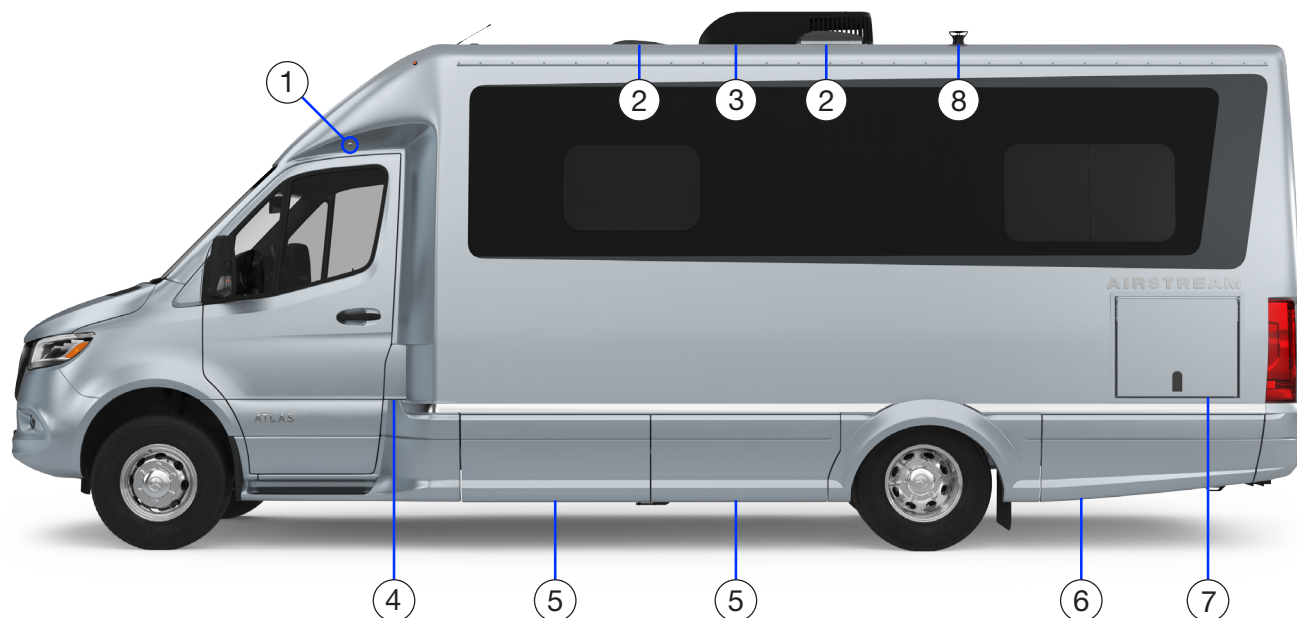


NOTE

Sections 6 and 9 contain additional information about these components. Mid-production changes may affect the exact location of the features shown above.

1. Exterior door light. Comes on when the door is opened and shuts off when the door is closed.
2. Ceiling vent fans; [see Ceiling Vent Fan on page 5-21](#).
3. Rooftop air conditioner; [see Rooftop Air Conditioner/Heat Pump on page 5-20](#)
4. Fuel door. Driver's door needs to be opened to access; [see Utility Compartment Doors on page 6-10](#).
5. Weather sealed storage compartments; [see Utility Compartment Doors on page 6-10](#).
6. Exterior rear compartment contains:
 - City water hookup and tank fill. Use only clean fresh potable water; [see City Water Hookup on page 6-7](#).
 - Exterior shower; [see Exterior Shower/Sprayer Port on page 6-6](#).
 - Switches for the dump valves, macerator pump, and macerator pump high-pressure hose reel; [see Drain and Waste System on page 9-6](#) and [see Emptying the Holding Tanks on page 9-7](#).
 - Waste tank flush; [see Waste Tank Flush on page 9-8](#).
 - Solar Port; [see Solar Ports on page 6-9](#).
 - Cable/Pre-wired Satellite TV inlet; [see Cable TV Hookup & Outdoor Viewing Setup on page 5-18](#).
 - 30-amp power cord inlet. Power cord can be stored inside; [see Shoreline Power Inlet and Cordset on page 6-8](#).
7. Pass-through storage; [see Pass-through storage Compartment on page 6-10](#).
8. Waste tank vent.

Curbside

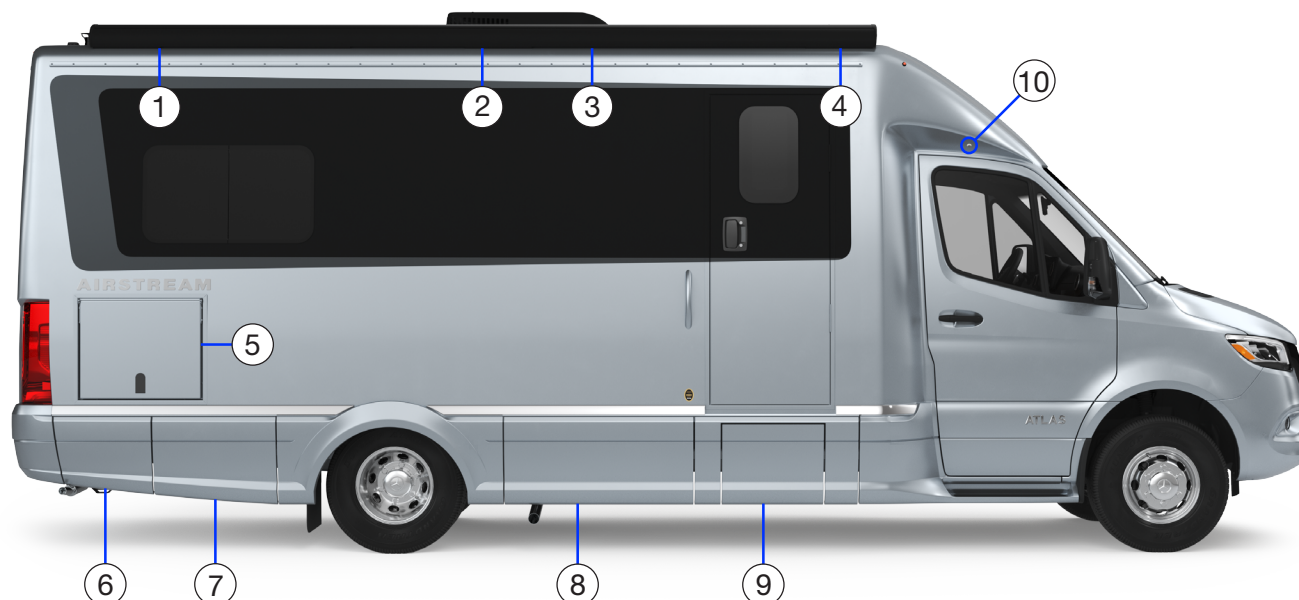

NOTE

Sections 6 and 9 contain additional information about these components. Mid-production changes may affect the exact location of the features shown above.

1. Patio Awning. Controlled by the multiplex system; [see Awning on page 6-11](#).
2. Exhaust Vent, Bath (approximate rooftop location/hidden by awning in photo); [see Exhaust Vent on page 5-21](#)
3. TV antenna (approximate rooftop location/hidden by awning in photo); [see TV Antenna on page 5-18](#).
4. Pre-wire Cap for Connected RV antenna (approximate rooftop location/hidden by awning in photo), [see Airstream Connected RV Antenna Pre-Wire on page 5-19](#).
5. Pass-through storage; [see Pass-through storage Compartment on page 6-10](#).
6. Weather sealed rear compartment; Solar Port mounted behind; [see Solar Ports on page 6-9](#).
7. Battery pack compartment; [see House Battery Pack on page 5-12](#).
8. Exterior compartment, [see Utility Compartment Doors on page 6-10](#); contains:
 - Exterior 120-volt outlet that provides an exterior GFCI protected electrical source.
 - TV outlet and HDMI port provides reception for an exterior television. It is pre-wired and integrated into the Cable/Satellite TV system; [see Setting Up an Outdoor TV on page 5-19](#).
9. Folding step with auto extend/retract, step out warning buzzer, and lock extended switch for easy entry into the touring coach; [see Exterior Folding Step on page 6-7](#).
10. Exterior door light. Comes on when the door is opened and shuts off when the door is closed.

Exterior

Exterior Features

Body Kit

The body kit provided by Airstream is made from state-of-the-art high impact plastic. The same material is used in the automotive industry for moldings, bumper guards, and trim. The kit is made to color specifications and requires no paint or finish. The cleaning procedures are the same as the painted finish on the Sprinter body; however, there are several automotive plastic care products on the market for exterior parts that will provide added protection from UV ray damage, dirt, and stains. Find one you like and use it as often as needed to help prevent fading.

Windows

Clean your touring coach windows the same way you clean the windows in your home. Clean the seals with a damp cloth and mild detergent every 3 to 6 months. Do not use strong solvents, as they will damage the seals. A coat of natural silicone lubricant applied after the seal has dried will keep it flexible. Spread the lubricant evenly with a brush or finger, working it into the surface. This is a good practice for all rubber seals in your touring coach.

⚠ WARNING

Failure to properly clean and lubricate the window seals could result in the window sticking to the jamb and should only be released by a qualified technician trained in the procedure. Do not force, pry, or apply great pressure to open the window. Failure to heed this warning may cause the window to shatter and/or cause personal injury.

For replacement of a damaged window, contact an Airstream Service Center.

Exterior Shower/Sprayer Port



Your Airstream is equipped with a shower sprayer port located in the rear roadside compartment. Push the provided sprayer hose fitting into the port until the quick-connect engages.

To disconnect, turn off both faucets, activate the sprayer to relieve water pressure from the hose, then press the quick-connect collar to release the hose.

NOTE

When not in use, ensure the valves are in the off position. Leaving them in the on position may cause cold water to mix with hot, resulting in warm water at interior valves.

City Water Hookup



The city water hookup is located in the roadside rear utility compartment of the touring coach. Your plumbing system has a built-in pressure regulator, limited to 50 psi, to protect your lines and faucets from extremely high pressures on some city water systems.

Use a tasteless, odorless, non-toxic, high-pressure hose of at least 1/2-in. diameter designed for motorhome use. The city water inlet is a standard garden hose thread. We suggest you carry two lengths of hose in order to reach hookups farther away than normal, as well as to have a spare.

After hooking up the hose, through the bottom access hatch inside the compartment, turn on the city water valve provided in the park and slowly open a faucet. There will be a lot of spurts and sputtering until all the air is expelled from the touring coach's system. It may take some time before all the air is expelled and a steady flow of water occurs. Once a steady flow is achieved at one faucet, the others should be opened long enough to expel the air in the lines going to them.

The water hookup is also used to fill the fresh water tank. To fill, turn ON the fresh water valve switch located below the shoreline power hookup. A red indicator light will turn on indicating the valve is open. When the switch is ON water is diverted to fill the fresh water tank. The valve will automatically close and the switch will turn OFF when the tank is full. If you wish to carry less than a full tank of water the fill percentage can be viewed on the main Multiplex control panels "Home" screen. Once the fill level reaches your desired percentage switch OFF the fresh water valve switch to close the valve.

Exterior Folding Step



A folding double step with automatic retraction is located at the main entry door. The step system includes a step-out warning buzzer and a Step Hold switch located just inside the main entry door. Review the following operational and safety information before using the step and ensure passengers are familiar with its operation.

With the engine off and the Step Hold switch off, the steps extend and retract automatically as the door is opened and closed. When the engine is started, the steps retract and will not extend to prevent damage while the vehicle is in transit.

If the steps do not retract fully, a warning buzzer will sound. Do not drive the vehicle until the steps are completely retracted.

Step Hold/Lock Extended Switch

The STEP HOLD switch is located just inside the main entry door. To use the Step Hold feature, turn the engine OFF, open the door to extend the steps, and turn the switch ON. The steps will remain extended while the door is opened and closed. Turn the switch OFF to return the steps to normal operation.

If the STEP HOLD switch is left on when the engine is started, the steps will retract. However, they will not extend when the engine is turned off and the door is opened. To reset the steps, close the door, turn the engine OFF, and turn the STEP HOLD switch OFF.

⚠ WARNING

LOOK BEFORE YOU LEAP. The steps will not extend with the opening of the door when the engine is running. Check that the steps are extended before leaving and entering the vehicle. Failure to follow this warning could result in personal injury.

Exterior

Receptacle, Cable, and USB Ports



An exterior receptacle is located in the curbside utility compartment between the wheels and step. Also in this compartment is the exterior cable hook-up, HDMI inlet, and USB ports. A motion sensor light has been installed for your convenience. The light can be manually switched off if needed, however, if switched off the motion sensor will not function.

Shoreline Power Inlet and Cordset



Your Airstream is equipped with a SmartPlug power inlet located inside the exterior roadside rear compartment. For more information, [see Charging via Shoreline Connection on page 5-14](#)

Before connecting power to your Airstream, plug the cordset (power cord) into the power source and check the cordset's Power Indicator Light. When the SmartPlug cordset is connected to a power source the LED light on the plug will indicate the following:

- ON - normal power condition. OK to proceed.
- OFF - no power condition. Check Connection and power.

In some older parks and other locations where three-pronged outlets are not available, certain precautions to ensure proper grounding and polarity must be taken. These precautions are listed below:

1. Attach the three-pronged plug to a two-pronged adapter. The third conductor line of this adapter has a short wire lead that must be grounded.
2. For proper grounding, connect the short ground lead to a grounded outlet box or to a cold water pipe. When no water pipe is available, drive a metal rod two feet into the ground and attach the ground lug to it, thus providing the unit with proper grounding.

NOTE

When the three-pronged plug can be used, there will be no problems with proper polarity or grounding with a properly-wired shoreline outlet.

As an RV owner, you may want to install a 30A 120V AC outlet in your home so you have a shore power hookup readily available. However, you must have the proper outlet installed. Typical household 30A outlets are wired 240 VAC for home appliances. **RV outlets are 30A 120V AC.** Ensure your electrician is aware of the difference, or they may mistakenly wire the outlet to 240 VAC.

NOTICE

Do not connect to a 240 VAC outlet. Connecting to a 240 VAC outlet may result in permanent damage not covered by warranty.

Taillights



Atlas Touring Coach taillights are hinged and can be opened to allow a service technician access. Two plastic body plug-clips hold the taillight closed. A plastic or nylon pry bar or trim tool can be inserted at the inside edge to pry open the taillight and release the clips, swinging the taillight open as shown

Solar Ports

 The solar ports on each side of the touring coach (see [Exterior Components on page 6-4](#)) allow plug-and-play connection of portable solar panels to provide solar charging capability, or to augment the existing solar charging capability (if equipped), but there are limits to what can be connected. For best results, use the portable solar kit specific to your model, available through Airstream Supply Company. These kits have been tested and are fully compatible. One kit can be connected to each port for simultaneous use. Scan the QR code to shop at <https://airstreamsupplycompany.com/>.

It may be desirable to park your coach in the shade on hotter days, but doing so might limit the solar charging capability of the rooftop panels. The portable kit has a cable that allows the fold-out panels to be placed away from the coach in the sun where they will still provide a charge.

If using portable solar panels other than those offered by Airstream Supply Company, consult your Airstream dealer to confirm the rated output is safe for this system. The following limits must be strictly observed to ensure proper system operation and to prevent damage:

- Combined total system output of the factory installed rooftop panels and any portable panels must not exceed the 50A/48V rating of the REDARC Alpha unit
- Each external port is rated for a maximum 20A input
- Multiple portable panels may be used across separate ports, provided that the total input through all external ports does not exceed 600W
- Portable panels must not include a built-in solar regulator

CAUTION

Exceeding any of the limits specified above may affect system charging behavior and can damage the electrical system.

Optional Hydraulic Leveling System

The Airstream Touring Coach can be equipped with the optional electrically/hydraulically driven leveling system. The hydraulic pump is powered by a 12 volt direct current motor, which pumps hydraulic oil through the hydraulic hoses to four leveling jacks. The leveling system can be operated by the control panel on the passenger's seat pedestal under the skirting. The control panel can also be removed and used remotely within 10 feet of the touring coach. The four leveling jacks are mounted directly to the touring coach's chassis and are pre-set to the required leveling capacity.

Leveling

Before starting the leveling procedure you must follow these guidelines:

1. Park on a surface that is as level as possible.
2. The parking brake must be engaged.
3. The transmission must be in Park.
4. The vehicles ignition must be ON.

To start the automatic leveling process press the "ON/OFF" button, located on the control panel, to switch the system ON. Press the "Automatic Mode" button to begin the leveling procedure. Once the leveling process is complete press the "ON/OFF" button again to turn the leveling system OFF. The jacks can be retracted by turning ON the system and pressing the "Retract All Jacks" button once. Make sure to turn OFF the leveling system once the jacks are in their stowed position.

For more information on the hydraulic leveling system, or how to manually level the touring coach, please refer to the user manual provided.

WARNING

This product is exclusively developed as a leveling system and may not be used for work under the vehicle, such as changing tires and maintenance.

WARNING

All jacks will retract when the parking brake is released or the ignition is turned on.

NOTICE

Depending on the terrain, the automatic leveling process takes about one minute during which all persons should refrain from entering the vehicle.

Exterior Doors

Entry Door

The side entry door is manufactured with a built-in, keyed dead bolt and door lock. The door lock, located below the door handle, is engaged from the inside by a red lever. The dead bolt, located above the door handle, is engaged by rotating the black knob. The door lock can be locked or unlocked using the key fob. The side door will only lock using the key fob if it is closed. To unlock using the key fob quickly double press the unlock button.

For lubrication and out-of-adjustment issues, refer to Section 9 - Maintenance.

⚠ WARNING

Before driving, the main entry door lock and dead bolt must both fully locked. If the door is not fully locked, the constant vibration of travel may cause the door to vibrate open.

Screen Door

The screen door is secured to the threshold of the main door and can be operated independently by sliding and latching it via a magnet catch. This innovated door takes a fresh approach to maximizing fresh air and your view while offering a smooth and steady screen operation.

NOTICE

Check that the screen door is retracted before closing the exterior door. Failure to follow this caution could result in damage to the screen door.

Utility Compartment Doors

The Atlas Touring Coach has several hidden utility hatches incorporated into the lower trim on each side of the coach. The compartment doors have no visible latches and are locked/unlocked using the key fob.

The utility compartment doors will lock when the lock button on the key fob is pressed or when the touring coach is in motion.

To unlock the utility doors quickly press the unlock button on the key fob twice. This will unlock the cab doors as well as the utility doors.

NOTE

To unlock the utility compartment doors at least one cab door must be closed. If both driver and passenger doors are opened the key fob will not unlock the utility doors.

⚠ CAUTION

Alarms have been incorporated to warn of an open exterior compartment when ignition is started. If an alarm sounds check the main Multiplex control panel for a warning notification before proceeding.

Pass-through storage Compartment

To open and access this area from the exterior, unlock the compartment with the provided key and press the button in the center to release the latch and open the door. When closing, shut the door first, then engage the latch.

NOTE

This pass-through storage area is accessible from the interior by lifting the top of the nightstand.

Awning

 The awning manufacturer's manual can be found in your Airstream owner's packet or by scanning this QR code and navigating to the instructions on Carefree's website at <https://www.carefreeofcolorado.com/>.

Extend and retract the awning and control the awning lights using the Multiplex panel.

NOTE

If extended, the awning will automatically retract when the vehicle is taken out of "Park". When the vehicle is in motion the awning will lock, preventing it from being extended while traveling. The lockout will be reset and the awning can be extended again after the engine has been turned off.

Awning Use In Wind and Rain

The automatic extra strong awning comes with a Direct Response™ System wind sensor. The Direct Response™ System is an innovative wind sensor system that automatically activates the 12V motor and retracts the awning in strong winds, thus avoiding possible damage to the awning.


The awnings primary use is for sun protection, it is recommended the awning be retracted in case of rain, wind, or snow.

NOTICE

If wind or extended periods of rain are expected, retract the awning and secure as for travel. The effects of wind and rain on any awning are unpredictable. Severe damage to the vehicle and or the awning may result and cannot be covered by warranty.

Awning Manual Override

If power to the vehicle is not available, the awning can be safely retracted using the manual override located on the idler (right) end of the case. A ratchet and socket extension has been included and is located under the passenger side compartment floor.

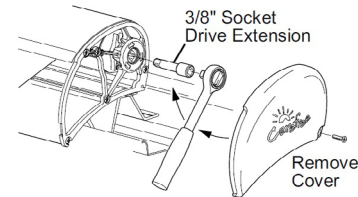

1. Remove the cover from the right end cap and save.
2. Insert the 3/8" socket drive extension and handle into the square drive hole inside the end cap.
3. Turn the handle clockwise until the awning is retracted.
4. Replace the end cap.

CAUTION

After closing the awning with the manual override, the lead rail may move out from the case 1/4"-1/2". This is normal and the awning is secure for travel until power is restored or repairs are completed. Do NOT attempt to force the lead rail in with the override, serious damage can occur to the awning.

NOTE

Manual override cannot be used to extend the awning.

Awning Care and Maintenance

1. **PERIODIC MAINTENANCE:** Like any other part of the touring coach, an owner should periodically inspect the awning. The following items should be checked.
 - a. All mounting brackets are tight.
 - b. Check all pivot points for enlargements of holes or broken rivets.
 - c. Check end caps for cracking and splitting.
 - d. Check that awning rail is tight against coach and all screws are tight.
 - e. Check canopy for loose stitching and possible shrinkage or puckering.
 - f. Clean and lubricate all tension knobs and pivot points.

Fuse Location: Chassis fuse panel under driver's seat.

Hitch Cover

How To Remove The Hitch Cover

The hitch cover is held in place with two thumbscrews that are threaded up from the bottom of the cover. Unscrew them to remove the panel and access the hitch and plug. Ensure the thumbscrews are fully tightened when reinstalling the cover.

Before Removal



After Removal



AIRSTREAM®

Section 7 SPRINTER VAN

IMPORTANT SPRINTER INFORMATION	7-2	CHANGING A TIRE	7-6
Fuel and Operating Fluids.	7-2	Flat Tire.	7-6
Travel Warning Light.	7-2	Precautions When Changing a Wheel	7-6
Mercedes me Connect App	7-2	Procedure	7-7
Component Identification	7-2	Jack	7-7
Sprinter Van - Serviced by Mercedes-Benz		INSTALLING AND REMOVING A WHEEL	7-8
Sprinter or Its Suppliers	7-3	Mounting a New Wheel.	7-8
Chassis	7-3	Centering Wheels With Wheel Fasteners.	7-8
Driver's and Passenger's Seats and		Lowering the Vehicle.	7-8
Restraint Systems	7-3	Wheel Bolt/Lug Nut Tightening	7-8
Airstream Components - Serviced by		TIRE ROTATION	7-9
Airstream Authorized Service Centers or		Rotation Pattern for Dual Rear Wheels.	7-9
Airstream suppliers.	7-3	Support	7-9
Cab Area.	7-3	Correct	7-9
Living Quarters	7-3	Incorrect	7-9
Electrical Components	7-3	AIR RIDE SUSPENSION	7-10
Exterior	7-3	Manual Adjustments	7-10
TIRES	7-4		
Vehicle Placard and Tire Inflation Pressure			
Label	7-4		
Proper Tire Inflation	7-4		
Under Inflation	7-4		
How Overloading Affects Your Tires	7-5		
Tires and Wheels	7-5		
Tire Grip	7-5		
Hydroplaning.	7-5		

Sprinter Van

The Airstream Atlas Touring Coach is integrated into a Sprinter Van designed and manufactured by Mercedes-Benz. Operation of the Sprinter, its engine, power train, and other related components are discussed in the Mercedes-Benz Sprinter Owner's Manual and other literature provided by Sprinter. As a point of reference, those systems discussed in this literature are warranted by Mercedes-Benz or their suppliers.

Important Sprinter Information

Your Mercedes-Benz Sprinter Van Operator's and Warranty Manuals contain important Cautions, Warnings, operational, and warranty information on the Sprinter and its components. All information in the Sprinter manual should be reviewed and followed for your safety. The Airstream Owner's Manual may provide additional information and tips on the use of the Sprinter Van as a touring coach; however, no information in the Airstream manual should be interpreted as advice or directions to disregard or void the warnings, cautions, or other information contained in the Sprinter manuals. If you believe there is a conflict in information, Warnings, Cautions, or safety-related information between the Sprinter and Airstream manuals, please contact the Airstream customer relations department immediately to resolve the conflict.

Fuel and Operating Fluids

The Sprinter Operator's Manual contains important information about the fuel and operating fluids approved for use by Mercedes-Benz. Review the Sprinter manual's information and notes on maintenance, fuel grades, and Mercedes-Benz-approved operating fluids before refueling or servicing the vehicle.

Refill only with commercially available ULTRA-LOW SULFUR DIESEL (ULSD, maximum sulfur content 15 ppm). Mercedes-Benz recommends fuels with a bio-diesel content of 5% (B5) or less whenever possible. The use of B20 fuel requires special precautions addressed in your Sprinter manual.

NOTICE

Do NOT use R95 diesel fuel. Use only fuels and operating fluids approved by Mercedes-Benz. Do NOT use any fuel additives or other operating fluid additives. Using the wrong fuel, incorrect operating fluids, or both may damage the vehicle.

Travel Warning Light

The travel warning light on the dash indicates that there is an open compartment or component which will make driving unsafe. Warnings include open Exterior Compartment, Awning, extended Hydraulic Leveling Jacks, or Step. See multiplex monitor panel if travel light is illuminated for displayed warning message.

Mercedes me Connect App

 Access your vehicle from anywhere and experience all the benefits of ownership with  Mercedes me connect. To learn more, scan this QR code or visit <https://www.mbvans.com/en/connectivity>.

The Mercedes me connect App directly pairs with your vehicle. Download the app from the link above (by scanning the QR code), or click on one of the following icons:



The app will guide you through the activation process, but you may also reach out to your Mercedes-Benz dealer to activate your account. For additional assistance, please call the Mercedes-Benz Customer Assistance Center at 877-762-8267.

Component Identification

If repairs are needed, it may be difficult to determine which parts are Mercedes-Benz and which are Airstream's responsibility. The lists on the following page show the major components of the van and the company responsible for their servicing.

 For assistance in locating a Mercedes-Benz service center in the United States, scan this  QR code or visit <https://www.mbvans.com/en/vehicles/dealer-locator-pages/dealers> and use the Mercedes-Benz dealer locator, or call 877-762-8267.

See Mercedes-Benz Sprinter Warranty Information for instructions on obtaining warranty service.

Sprinter Van - Serviced by Mercedes-Benz Sprinter or Its Suppliers

Chassis

Engine	Speed control
Exterior automotive lights	Automotive electrical system
Engine battery	Instrument panel cluster
Power mirrors	Hitch receiver and tow plug
Engine cooling system	Cab doors
Fog lamps	Heated drivers/passenger seats
Transmission	Cab door windows and windshield
Chassis suspension	AM/FM radio antenna
Brakes	Dash Multimedia Center
Drive axle and hubs	Dash AC/heater/defroster
Steering assembly, Steering wheel	Cargo door assist handle
Heated windshield	Lane keeper assist
Automotive fuse panel	Blind spot assist
Wheels, Tires	High beam assist
Parking brake	Collision prevention assist
Alternator	Front Parktronics
Fuel pump	

Driver's and Passenger's Seats and Restraint Systems

Sprinter provides the swivel pedestals and Airstream provides the seat decorative skirting and recovers the front seats to match the surrounding decor.

Airstream Components - Serviced by Airstream Authorized Service Centers or Airstream suppliers.

Cab Area

Driver's and passenger's seat skirting and covers.
 Floor Mats
 Dash Kit
 Rear View Mirror/Monitor
 Exterior door lights

Living Quarters

Fire extinguisher	Three piece sun and privacy shade
Interior furniture	Window Coverings
Appliances in the lounge/lavatory area.	Floor covering
Smoke/CO detectors	All plumbing systems

Electrical Components

Inverter/Charger	Living area entertainment center
House battery	Roof AC
Battery disconnect	TVs and TV antenna
Power vents	GPS/Sirius antenna
120-volt system	Camera monitoring system and rear proximity sensors
12-volt living area system	
Multiplex System	

Exterior

Alcoa Dura Bright Rims	Air Ride System
Exterior body kit	Macerator pump
Power step	Solar panels
Exterior lights	
Awning	

NOTE

Some features listed may not be available on your Atlas.

If you need further clarification or information, contact the Airstream Customer Relations Department at (937)596-6111 before contacting a service center for an appointment.

If you wish to write, the address is:

Airstream Inc.

Attn: Customer Service

428 W. Pike Street

P.O. Box 629

Jackson Center, Ohio 45334

Tires

Under inflation or over inflation of tires is dangerous. Under inflation can result in tire flexing, heat build-up, tire overloading, bad handling, bad fuel economy, and uneven wear. Over inflation can result in abnormal wear, bad handling, and harsh ride.

Tire inflation pressures should be checked as per the Mercedes-Benz Sprinter Owner's manual and when significantly changing the load you plan to carry in your touring coach. Set the correct tire pressure before loading the vehicle. Always check tire inflation pressures when the tires are "cold." Front and rear pressures and GVWR are shown for each model, and are based on the GVWR and front and rear axle ratings (GAWRs) printed on your vehicle VIN plate and certification label. Tires must be inflated to these pressures when the vehicle is fully loaded or an axle GAWR is reached.

For tire size and inflation pressures, [see Specifications on page 4-3](#).

Proper front end alignment improves tire tread mileage. Your front-end suspension parts should be inspected periodically and aligned when needed. Improper alignment may or may not cause the vehicle to vibrate. However, improper toe alignment will cause front tires to roll at an angle, which will result in faster tire wear. Incorrect caster or camber alignment will cause your front tires to wear unevenly and can cause the vehicle to "pull" to the left or right.

Vehicle Placard and Tire Inflation Pressure Label

The TIRE AND LOADING INFORMATION placard supplies information on the size and the cold tire inflation pressure for the original equipment tires supplied with your vehicle. Check the Sprinter manual for all weights and tire information placard location.

A MOTORHOME TIRE SAFETY ADDENDUM is included with your Airstream owner's packet. Please take the time to read, understand, and follow the information contained in the booklet.

Proper Tire Inflation

The level of air in your tires affects your vehicle's overall performance. Not even the highest quality tire will perform well if it's not inflated properly. The correct pressure varies from vehicle to vehicle and depends in part upon driver preference. Each vehicle has a recommended inflation pressure, usually found on a placard. Check the Sprinter manual for all weights and tire information and the placard location.

Correct tire inflation is a key component in tire care. The recommended inflation pressures for your tires are indicated on the certification label or in your owner's manual. Since touring coach's can be loaded with many different configurations, the load on each tire will vary. For this reason, air pressure should be checked based on the load on each individual tire. Cold Inflation Pressure should be adjusted to handle the maximum tire load, and all tires on the axle should carry the same inflation pressure. Cold tire inflation pressure is the tire pressure checked in the morning before you drive more than a few miles or before rising ambient temperatures or the sun's radiant heat affect it. Check your tire air pressure at least once a month, before each trip, and each morning you drive during a trip. Tire pressure should be checked cold, as tire pressure ratings have been designed with typical running heat/pressure build up in mind. Make sure the valves and caps are free of dirt and moisture.

Under Inflation

Under inflation brings a higher risk of susceptibility to damage due to road hazards, reduces tire casing durability, and causes a loss in fuel economy, plus uneven or irregular tire wear. Severe under inflation brings about an increased risk of tread separation, handling difficulties, and possibly tire failure, which is caused by overheating.

WARNING

It is a common practice for motorhome owners to lower tire pressure in their search for a smoother ride. This is not only dangerous, it is relatively ineffective, and the difference in ride quality is not significant. When minimum inflation pressure requirements are not met, tire durability and optimum operating conditions are compromised. Tire inflation pressure should always meet at least the minimum guidelines for vehicle weight

- It may be necessary to inflate your tires at a truck stop or truck service center in order to achieve adequate air pressure for your coach's needs
- Only permanent air seal metal valve caps should be used.
- Be safe - if a tire has been run 20 percent under inflated, it must be dismounted and inspected by a trained professional. It should not be inflated without a full inspection or without using a safety cage. Use a calibrated gauge. If your tire is rated for higher inflation pressures, a special gauge designed for larger tires will be required.

⚠ WARNING

Due to RISK OF EXPLOSION damaged tires or tires run with more than a 20% underinflation (approximate) must be dismantled, inspected by a trained professional, and should not be inflated without using a safety cage.

- Don't bleed air from warm tires to reduce pressure buildup.
- Don't inflate tires to cold psi rating beyond rim specifications.

How Overloading Affects Your Tires

Tire pressure is what enables your touring coach tires to support loads. Overloading your tires can have serious consequences for passengers and your touring coach. Too much weight can cause stress on your touring coach's suspension system, brake failure, shock absorber damage, handling and steering problems, irregular tire wear and possible tire failure. Excessive loads or under inflation can lead to an excessive amount of heat and tire failure. If you discover that your tires cannot handle the load, lighten the weight of the load on your tires.

Tires and Wheels

(This section is partially excerpted from the Mercedes-Benz Sprinter Van Operator's Manual.)

Check tires regularly for even tread wear, tread depth (note legal requirements), and signs of external damage. Use only wheels and tires of the same size, make, and pattern.

Do not install tires that are not approved for the size and type of wheel installed on the vehicle itself. Only use those wheel sizes that were delivered to you by your authorized Mercedes-Benz Sprinter dealer.

Use only wheels and tires that have been tested and approved by the vehicle manufacturer.

Break in the tires at moderate speeds for distance of about 65 miles.

⚠ WARNING

Always replace wheel nuts that are damaged or rusted. Never apply oil or grease to wheel nuts. Damaged wheel hub threads should be repaired immediately. Incorrect mounting bolts or improperly tightened mounting bolts can cause the wheel to come off. This could cause an accident. Make sure to use the correct mounting bolts. Check tightness of wheel nuts regularly and retighten if necessary.

Tire Grip

Tire grip is greatly reduced on a wet or icy road. Speed and driving style must therefore be adapted to suit road conditions. Below a tread depth of 1/8 in., tire grip begins to decrease rapidly on wet roads.

Hydroplaning

Depending on the depth of the water layer on the road, hydroplaning may occur, even at low speeds and with new tires. Reduce vehicle speed, avoid grooves in the road, and apply brakes cautiously in the rain.

The majority of flood-related deaths are caused by people attempting to drive through moving water. Driving into flood waters may be the most dangerous thing one might ever try. Considering the following:

- Most cars will float (and be swept away) in 18-24 inches of moving water. Trucks and SUVs have only 6-12 more inches of clearance. Creeks and rivers can rise very rapidly and the road bottom can also wash away, making the water much deeper than it appears.
- Once cars are swept downstream, they will often roll to one side or perhaps flip over entirely. The driver has a few seconds to escape the vehicle. Many drivers panic as soon as the vehicle submerges and are found later with their seat belt intact.

Changing A Tire

(Partially excerpted from the Mercedes-Benz Sprinter Van Operator's Manual)

After changing a wheel, the wheel nuts must be tightened once the vehicle has been driven for about 30 miles.

If new or repainted wheels are fitted, the wheel nuts must be retighten again after about 600 to 3000 miles. Do not use remolded tires.

⚠ WARNING

Fitting wheel sizes other than those supplied by Sprinter to the vehicle will change the Sprinter's handling characteristics and may lead to an accident resulting in severe personal injuries, death and property damage.

⚠ WARNING

Read the Sprinter manual for wheel bolt or lug nut torque and wheel tightening procedures.

⚠ WARNING

The Mercedes-Benz Sprinter Operator's Manual contains important cautions, warnings, specifications, and operational information on changing, maintaining, and replacing of the tires and wheels. Read, understand, and follow the Sprinter manual sections for changing a tire.

⚠ CAUTION

Changing a tire on a touring coach chassis is a physically demanding procedure. It requires specialized tools and knowledge of safety procedures. Only you can determine your knowledge base and physical ability. Don't take any unnecessary risks. Find a safe area to park your Airstream, and call a tire service center and supply them with the information in the Sprinter Manual if you have any doubts about changing a tire.

Flat Tire

If you get a flat tire while driving, gradually decrease your speed. Hold the steering wheel firmly and slowly move to a safe place on the side of the road. The pressure of the spare wheel (sold separately) should be checked regularly (at least after every tenth time at the filling station).

The vehicle tool kit is located in a hatch under the front passenger foot well.

⚠ WARNING

Use a jack (sold separately) designed exclusively for jacking up the vehicle at the jack take-up brackets built into either side of the vehicle. To help avoid personal injury, use a jack only to lift the vehicle during a wheel change. Never get beneath the vehicle while it is supported by a jack.

Precautions When Changing a Wheel

- Keep hands and feet away from the area under the lifted vehicle.
- Always firmly set parking brake and block wheels before raising vehicle with jack.
- Do not disengage parking brake while vehicle is raised.
- Always use the jack on a level surface.
- Do not jack the vehicle up more than 1-2 in. between the tire and the surface. Otherwise, the vehicle may tip over and may cause serious injury or death to you or others.
- Be sure that the jack arm is fully seated in the jack take-up bracket.
- Always lower the vehicle onto sufficient capacity jack stands before working under the vehicle.
- Do not damage, grease, or oil wheel nuts or stud threads.

Procedure

- Park the vehicle on a firm, level, non-slippery surface.
- Switch on the hazard warning flasher switch, apply the parking brake, and place the transmission selector in "P".
- Everyone must leave the vehicle before you jack it up.
- Everyone must leave the danger zone before you jack up the vehicle. Danger zones vary with locations. Take a minute and look at what might happen if the vehicle falls off the jack and rolls. Set up your danger zone.
- The vehicle must be safeguarded in accordance with legal regulations (such as using a warning triangle).
- Prevent vehicle from rolling away by blocking wheels with wheel chocks (not supplied with vehicle) or sizable woodblocks or stone. On a level road place one chock in front of and one behind the wheel that is diagonally opposite to the wheel being changed. When changing a wheel on mild uphill or downhill grade, place chocks on the downhill side blocking both wheels of the other axle. Do not jack vehicle up on a steep grade.

⚠ WARNING

Do not change wheels on a steep uphill or downhill grade. The vehicle may begin to move and fall from the jack, which could cause property damage, personal injury, and/or death.

Jack

Read, understand, and follow the Mercedes-Benz Sprinter Operator's manual instructions, cautions, and warnings for changing a wheel and jack point locations.

- Loosen the wheel nuts before raising the vehicle.
- Close the release valve on the jack.
- Assemble the pump lever provided and insert it into the socket on the jack.
- Secure lever by turning it clockwise in the socket.
- Position the jack under the appropriate jack point and raise the vehicle by pumping the lever.

⚠ WARNING

A jack (sold separately) is intended only for raising the vehicle briefly, for instance when changing a wheel. The jack must be placed on a firm, flat surface only. Do not crawl under the vehicle while it is raised with a jack. Do not start the engine while the vehicle is jacked up. Do not jack the vehicle up more than 1-2 in. between the tire and the surface. The vehicle may tip over and cause serious injury or death to you or others. Jack stands must always be used while working beneath the vehicle. Failure to follow these precautions could result in property damage, personal injury, and/or death.

Installing and Removing A Wheel

- Loosen the wheel fasteners (wheel bolts or lug nuts).
- Jack up the vehicle until the wheel is clear of the ground.
- Unscrew the fasteners and remove the wheel (keep the fasteners clean).

⚠ WARNING

If the vehicle moves forward or backward while it is being jacked up, lower it, stabilize the vehicle, and repositioned the jack. When the vehicle is jacked up, the jack must stand vertically (plumb-line).

Mounting a New Wheel

- Before fitting the spare wheel, clean rust and dirt off the contact surfaces of the wheel and the wheel hub and from wheel bolts or lug nuts.
- Note the specified wheel and tire size, tire load capacity, and speed code.
- Do not change the tire's direction of rotation.
- Do not damage, grease, or oil wheel bolts or lug nuts or their threads.

Centering Wheels With Wheel Fasteners

- If dual assemblies are used, before placement, the inner wheel should be inspected to ensure all ball bearing rings are in the proper position.
- Install the wheel and snug the wheel fasteners.
- Slightly tighten wheel fasteners.

Lowering the Vehicle


- Slowly open the jack release valve to lower the vehicle until tire is resting on the ground.
- Tighten the wheel fasteners in a crisscross pattern, as specified, with a torque wrench. For wheel fastener torque procedures, see the Mercedes-Benz Sprinter Van Operator's Manual.
- Remove the jack and stow.
- Check the tire pressure. For tire pressures see the vehicle manufacturing tag on the driver's door jam of your touring coach; also [see Specifications on page 4-3](#).
- Torque wheel fasteners immediately after reinstalling a wheel and again after 30 miles.

⚠ WARNING

Only certain tires meeting the tire size/load/speed index ratings contained in the Tire Pressure Tables, found in the Index Section of the Mercedes-Benz Sprinter's Operators or Owner's Manual, are certified to conform to FMVSS 120 for the Sprinter Vehicle. Please check the sidewalls of your originally-equipped tires for specific makes/sizes, and speed load ratings when you need to replace your tires. To prevent accident, injury, or possible death, use only the correct tires for your tire replacement.

Wheel Bolt/Lug Nut Tightening

Torque wheel fasteners evenly to specification with a torque wrench using a crisscross pattern in the proper sequence:



⚠ WARNING

Consult the Mercedes-Benz Sprinter Operator's manual for extensive wheel installation, tightening, torque procedures, cautions, and warnings.

⚠ WARNING

Wheel fastener torque must be checked immediately after reinstalling a wheel and again after 30 miles. Torque all wheel fasteners evenly to specification using the proper sequence. For torque values, [see Specifications on page 4-3](#).

⚠ WARNING

Tightening by hand or with an impact wrench can result in loose or overtightened wheel fasteners, which could lead to a wheel falling off while driving or damage wheel and brake components.


Tire Rotation

Front and rear tires perform different jobs and can wear differently depending on the types of roads driven, driving habits, etc. To obtain the longest tire life, you should inspect and rotate your tires regularly.

Many automotive dealers and tire dealers will perform a free tire inspection to look for uneven or abnormal tire wear.

Tires should be rotated every 6,000 to 8,000 miles. For the longest tire life, any time irregular wear is seen have the tires checked, alignment checked, and tires rotated by your truck or tire dealer. Have the cause of uneven wear corrected.

Rotation Pattern for Dual Rear Wheels.



⚠ WARNING

Read the Mercedes-Benz Sprinter Operator's Manual for complete instruction on tire rotation, installation, and maintenance.

NOTICE


Vehicles with aluminum alloy wheels will require tires to be dismounted and remounted so as to leave rims in original locations because the dura bright finish is only applied to one side.

Support

Since touring coach's may sit for long periods it is important to properly support the tires if blocks are used for leveling.


Extreme caution must be taken to ensure that the tires are fully supported when using blocks to level the touring coach. The load on the tire should be evenly distributed on the block and in the case of duals, evenly distributed on blocks for both tires. If not done, the steel cables in the sidewall of the tires may be damaged and could lead to premature fatigue of the sidewall.

Correct

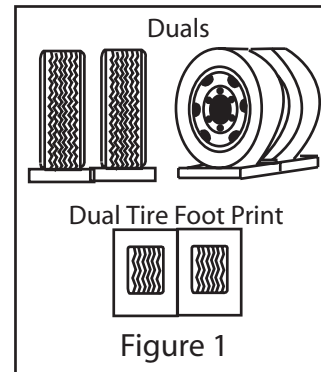

The CORRECT methods are shown in Figure 1. Dual tires are supporting the full load. Please note that the blocks are wider than the tread and longer than the tire's footprint. This provides maximum support to the tires and ensures that the load is evenly distributed throughout the tire's footprint area.

Incorrect

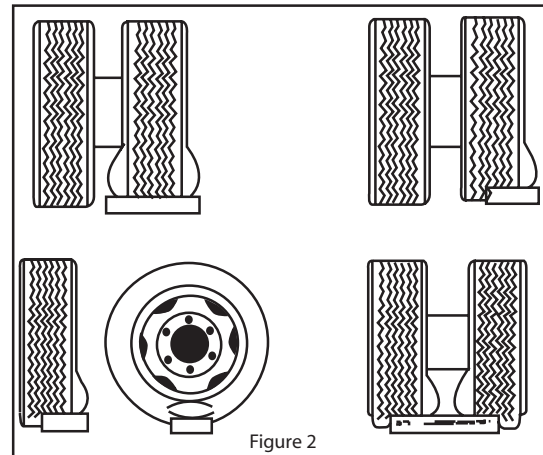


INCORRECT methods are shown in Figure 2: One tire, a portion of one tire, or portions of two tires are supporting the full load.

⚠ WARNING

Tires that are incorrectly supported may be damaged, which could lead to casing failure resulting in serious injury or property damage. If, on previous occasions, the tires have been incorrectly supported, hidden damage may be present. Please contact your local tire dealer and request an inspection and a determination of possible damage.

Air Ride Suspension

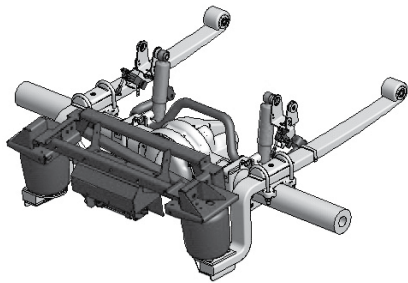

The touring coach is equipped with a rear axle air suspension. The Mercedes-Benz Sprinter Van is extremely suited for this air suspension system.

The full-air rear-axle air-suspension, has an electronic system which automatically monitors and adjusts the height level of the vehicle. This constant monitoring and adjusting will automatically contribute to safer vehicle behavior and better comfort.

The Atlas air ride system has a “ferry ramp” option allowing the touring coach to be driven at max height up to 7 mph, after which the coach will return to its normal ride height.

⚠ CAUTION

Carefully read and understand all manufacturer's instructions provided in your owner's packet prior to operating.

Manual Adjustments



A remote, located on the B-pillar next to the drivers seat, can be used to manually adjust the air suspension. To manually adjust, while parked set the emergency brake. With the engine running, press the up or down arrows to raise or lower the rear of the van.

NOTE

Once the vehicle is in motion, the air ride system will automatically self-adjust to ride height. You can not manually adjust the height while the vehicle is in motion.

AIRSTREAM®

Section 8 DRIVING

LOADING	8-2	TOWING A TRAILER	8-6
Weighing	8-2	Towing a Boat	8-6
Vehicle and Trailer Weights and Ratings Definitions	8-2	Tracking	8-6
Procedure for Weighing a Touring Coach . . .	8-3	Brake Controller	8-7
Weight Distribution	8-3	Backing Up	8-8
SAFETY	8-4	Rearview and Side Monitor System	8-9
Seat Belts	8-4	Passing	8-9
TRAILER TOWING AND DRIVING TIPS	8-4	Parking Your Touring Coach	8-9
Hitch	8-4	TOWING YOUR TOURING COACH	8-10
Loading a Trailer	8-5	SAFETY CHECK LIST	8-10
Checking Weights of Vehicle and Trailer . . .	8-5	Exterior Check List (Before Entering Vehicle) .	8-10
Attaching a Trailer	8-5	Interior Check List (Before Driving)	8-10

Loading

One of the most critical aspects of safely operating a touring coach is knowing the weight involved and where it is placed. The first thing to determine is how much cargo is being loaded and confirming that it is within the capacity of the equipment being used. Determining WHERE that load is placed is critical to the way your rig will handle on the road.

Do not try to guess what your touring coach weighs loaded. Load your touring coach including water and take it to a public scale. Weigh each axle of your vehicle. Refer to your axle weight and tire limits to see if you are within a safe range. Total all axle weights and make sure you are below the GVWR. If you are not overloaded, make sure your load is balanced. Do not load too much on one side. A balanced load is much easier to tow or drive.

Front to back balance is also important. Step back and look at your touring coach. Make sure there is not too much weight in the front or on the rear of the touring coach. Be sure to secure all items. Loose items can cause damage and can be a safety issue.

The Cargo Carrying capacity tag shown below is installed on every touring coach and can be found on the inside of the door on your vehicle.

MOTOR HOME OCCUPANT AND CARGO CARRYING CAPACITY
VIN #####
THE COMBINED WEIGHT OF OCCUPANTS AND CARGO SHOULD NEVER EXCEED
XXX kg or XXX lbs
Safety belt seating capacity: XXX
CAUTION
A full load of water equals XXX kg or XXX lbs of cargo @ 1 kg/L (8.3 lb/gal) and the tongue weight of a towed trailer counts as cargo

To arrive at "THE COMBINED WEIGHT OF OCCUPANTS AND CARGO SHOULD NEVER EXCEED" number, Airstream weighs the vehicle as finished and adds the weight of chassis fuel. That number is subtracted from the GVWR of the touring coach and listed on the tag. The total weight of any and all cargo, including but not limited to dealer or customer modifications or additions, fluids (fresh water and holding tanks), food, clothes, tools, tongue weight of a towed trailer or vehicle, and passengers should never exceed the number listed while the touring coach is in transit.

The "SAFETY BELT SEATING CAPACITY" is the number of passengers that seat belts are provided for.

The "A FULL LOAD OF WATER EQUALS" number is arrived at by multiplying the fresh water tank capacity by 1Kg/L or 8.34 lb/gal.

When loading the vehicle it is important to keep the GVWR, GAWR, Tire Weight Ratings (listed on the vehicle tire Information placard), and the cargo and occupant capacity in mind and not to exceed these specifications. Your safety depends on not overloading the touring coach, axles, and tires. For more information, [see Specifications on page 4-3](#).

Weighing

To determine the actual weight of your vehicle with personal cargo and water, it must be weighed on scales as you plan to travel. The most common scales are those used by states to weigh trucks along the highway. In rural areas, grain elevators, gravel pits, and cement outlets are a good source.

NOTE

Weighing instructions for this touring coach are explained on the next page. If you have trouble locating scales, a call to your State Highway Patrol will usually find them cooperative in assisting you.

Vehicle and Trailer Weights and Ratings Definitions

Gross Vehicle Weight Rating (GVWR) is the maximum permissible weight of the touring coach.

Gross Vehicle Weight (GVW) comprises weight of vehicle including tools, installed accessories, passengers, cargo, and trailer tongue weight. It must never exceed the GVWR.


Gross Axle Weight Rating (GAWR) is the maximum permissible axle weight.

Gross Trailer Weight (GTW) is the maximum permissible trailer weight to be towed.

Trailer Tongue Weight Rating (TWR) is the maximum permissible weight of the trailer tongue. This counts as cargo when loading a touring coach.

NOTE

Check the Sprinter manual for all weights and the tire information placard location.

Front Axle GAWR	GVWR	Rear Axle GAWR	GCWR - GVW
SCALE WEIGHT		Optional Tow Weight	
			
STEP 1 Front Axle GAW	STEP 2 GVW	STEP 3 Rear Axle GAW	STEP 3a Tow Weight minus Weight of Trailer or Vehicle Towed
INDIVIDUAL WHEEL POSITION WEIGHT			
			
STEP 4 Left Front Wheel Position	STEP 5 Left Side (Total LF + LR)	STEP 6 Left Rear Wheel Position	
Calculated	Calculated	Calculated	
Right Front Wheel Position Step 1 minus Step 4	Right Front (Total RF + RR) Step 2 minus Step 5	Right Rear Wheel Position Step 3 minus Step 6	

GAWR = Gross Axle Weight Rating

GVWR = Gross Vehicle Weight Rating

GCWR = Gross Combination Weight Rating

Procedure for Weighing a Touring Coach

Vehicle should be weighed loaded, as you normally travel.

1. Fill in first row from Specification Section - 4 of this manual.
2. Weigh vehicle as shown in row 2 (Scale Weight) and fill in blanks.
3. Weigh one side of vehicle as shown in Individual Wheel Position Weight.
4. Calculate other side as shown in last row.

NOTE

Check the Sprinter manual for all weights and the tire information placard location.

Weight Distribution

Touring coach's have fresh water, waste and gray water tanks, and storage areas. It gives you great flexibility in loading. If you want to load down all the storage compartments, the amount of fluids may have to be reduced. Distribute your additional cargo as evenly as possible with the heaviest objects located as low as possible.

Even if you're going to a remote area, you can usually fill your water tank shortly before entering the area. Just reducing your load by 10 gal of water lets you carry an additional 83.4 lb of cargo.

Safety

Seat Belts

Federally approved seat belts are provided for the use of the driver and passenger. Most states require by law that all passengers in a motor vehicle use seat belts while in transit. It is strongly recommended that all occupants remain seated with their safety belts firmly attached while the touring coach is in transit. The driver should adjust his or her seat so that he or she is able to reach all controls easily with the belt on, and be able to use all the travel on the foot brake. Seat belts should be placed as low as possible around the hips to prevent sliding out from under them in case of an accident. This places the load of the body on the strong hipbone structure instead of around the soft abdominal area. Remember, there should only be one occupant per seat belt when traveling.

The driver and front passenger seat belt buckle operation is explained in the Sprinter manual.

⚠ WARNING

Become familiar with and follow all directions, advice, and warnings pertaining to seats, seat belt operation, and restraint systems, provided in the Mercedes-Benz Sprinter Operator's Manual. Do not allow passengers to ride anywhere in the touring coach except in seats that are equipped with approved seat belts.

⚠ DANGER

Children must be secured in a federally-approved child restraint device. Failure to use proper restraints while in transit can result in severe or fatal injuries. Never place an infant seat that faces to the rear on the front passenger seat. Never place an unbelted infant seat on any seat while in transit.

Child restraint devices are designed to be secured with lap or lap/shoulder belts. All instructions supplied by the restraint manufacturer must be followed. Statistics have shown children are safer when properly restrained in a rear seating position than in a front seating position.

Don't hesitate when it comes to passenger safety. Make sure all passengers are properly restrained.

Trailer Towing and Driving Tips

(Some text is partially excerpted from Mercedes-Benz Sprinter Operators Manual.)

⚠ WARNING

Failure to use proper equipment and driving technique can result in a loss of vehicle control when towing a trailer. Improper towing or failure to follow the instructions contained in this section can result in serious injury. Follow the guidelines below carefully to assure safe trailer operation. Ask your authorized Mercedes-Benz Sprinter or Airstream dealer if you require an explanation of information contained in the manuals.

Hitch

Atlas units have hitches and wiring installed from the Mercedes-Benz manufacturer. The Sprinter 7- way connector is used for lights and charge line on a trailer. For further information, please see your authorized Mercedes-Benz Sprinter dealer.

To reduce the possibility of damage, remove the hitch ball adapter from the receiver when not in use.

Since this vehicle is designed and intended primarily as a load-carrying vehicle, towing a trailer will affect handling, durability and economy. Maximum safety and satisfaction depends upon proper use of correct equipment and avoiding overloads and other abusive operation.

⚠ WARNING

The total weight of the touring coach and trailer must not exceed the GCWR listed in the specification section of this manual. The maximum towing capacity varies according to the size of the touring coach and its GCWR. Vehicles should be properly equipped for towing trailers. Information on trailer hauling capabilities and special equipment required may be obtained from your Mercedes-Benz Sprinter and/or Airstream dealer.

Loading a Trailer

When loading a trailer, you should ensure neither the permissible GTW (Gross Tongue Weight), nor the trailer GVWR are exceeded.

Maximum permissible values are listed on the safety compliance certification labels for the vehicle and for the trailer to be towed. For their location, see the Mercedes-Benz Sprinter Operator's Manual. The lowest value listed must be selected when determining how the vehicle and trailer are loaded.

To assist in attaining good handling of the vehicle/trailer combination, it is important that the tongue weight be maintained at approximately 10-15 percent of the loaded trailer weight, but not to exceed the hitch rating. Tongue loads can be adjusted by proper distribution of the load in the trailer, and can be checked by weighing separately the loaded trailer and then the tongue.

The tongue weight at the hitch ball must be added to the GVW to prevent exceeding your Sprinter towed vehicle's rear GAWR.

When towing trailers, touring coach tires should be inflated to the highest pressures shown on the Sprinter Tire Information Placard. See Mercedes-Benz Sprinter Operator's Manual for its location. The Cargo Carrying Capacity (CCC) of this vehicle is reduced by the amount that equals the trailer tongue load on the trailer hitch.

Checking Weights of Vehicle and Trailer

To assure that the tow vehicle and trailer comply with the maximum permissible weight limits and to know the actual weights, have the loaded vehicle-trailer combination (tow vehicle including driver, passengers, cargo and trailer fully loaded) weighed on a commercial scale as explained earlier in this section.

Also, check the vehicles front and rear axle weights and tongue weight. The values as measured must not exceed the Sprinter weight ratings listed on vehicle information placards and in the Mercedes-Benz Sprinter manual. These ratings are also listed in the Specification section of this manual, Section 4 - Floor Plans And Specifications.

NOTE

Check the Mercedes-Benz Sprinter manual for all weights and tire information placard locations.

Attaching a Trailer

Please observe maximum permitted trailer dimensions (weight and length).

Most states and all Canadian provinces require safety chains between your tow vehicle and trailer. The chains should be crisscrossed under the trailer tongue. They must be attached to the hitch receiver and not to the vehicles bumper or axle. Be sure to leave enough slack in the chains to permit turning corners.

Most states and all Canadian provinces required a separate brake system for towing trailers.

⚠ WARNING

The towing vehicle's braking system is rated for operation at GVWR, NOT at the GCWR. A separate, functioning brake system is required for any towed vehicles or trailers weighing more than 1000 lb (450 kg) when fully loaded. NEVER exceed the GVWR, or the GAWR specified on a touring coach certification label. Also, NEVER exceed the weight ratings of a trailer hitch installed on a touring coach. Failure to heed any part of this warning could result in loss of control of the touring coach and towed vehicle or trailer which may cause an accident and serious injury. For specified towed vehicle braking requirements, consult the Mercedes-Benz Sprinter Operator's Manual that comes with the vehicle.

⚠ WARNING

Do not connect a trailer brake system (if trailer is so equipped) directly to the vehicle's hydraulic brake system if your vehicle is equipped with anti-lock brakes. If you do, neither the vehicle's brakes nor the trailer's brakes will function properly. Property damage, injury, or death to you or others may be the result.

The provided vehicle electrical wiring harness for trailer towing has a brake signal wire for hookup to a brake controller. Most states and all Canadian provinces require a breakaway switch on trailers with a separate brake system. The switch activates the trailer brakes in the possible event that the trailer might separate from the tow vehicle. Please consider using a trailer sway control system. For further information, see your authorized Mercedes-Benz Sprinter or Airstream dealer.

Towing a Trailer

There are many different laws, including speed limit restrictions, having to do with trailer towing. Make sure that your vehicle-trailer combination will be legal not only for where you reside, but also for where you'll be driving. A good source for this information can be the State Attorney General, State Police, or local authorities.

Before you start driving with a trailer, check the trailer's hitch, breakaway switch, safety chains, electrical connections, lighting, and tires. Also, adjust the mirrors to permit an unobstructed view beyond the rear of the trailer.

If the trailer has brakes using an electric brake controller, start your vehicle and trailer moving slowly, and then apply the brakes manually using the brake controller to be sure the brakes are working properly. Read and follow the controller manufacturer's recommendations.

When towing a trailer, check occasionally to be sure the load is secure, and lighting and trailer brakes (if so equipped) are functioning properly. Always secure items in the trailer to prevent load shifts while driving.

Take into consideration that when towing a trailer, the handling characteristics are different and less stable from those when operating the vehicle without a trailer. It is important to avoid sudden maneuvers.

The vehicle and trailer combination is heavier, and therefore is limited in acceleration ability and requires longer stopping distances. It is more prone to reacting to side wind gusts, and requires more sensitive steering input.

In order to gain skill and an understanding of the vehicle's behavior, you should practice turning, stopping and backing up in an area which is free from traffic.

If possible, do not brake abruptly, but rather engage the brake slightly at first to permit trailer to activate its brake. Then increase the braking force.

We want every owner to be a safe and courteous driver. A few hours of towing practice in a large empty parking lot will make pulling your trailer over the road much easier. Line out two corners for left and right turns. You may also use these corners to practice backing and parking.


Towing a Boat

While it is possible to tow a boat with your touring coach, Airstream does not recommend it. If you plan to pull and launch a boat, use caution when backing down boat ramps, and do not submerge any part of your touring coach in water. The slope of some boat ramps may be lower than others, requiring a portion of the tow vehicle to be submerged when launching. While this may be okay for some vehicles, your touring coach has sensitive electronics that water infiltration would irreparably damage.

NOTICE

It is imperative that you do not allow any part of your touring coach to be submerged in water as it could cause damage to electrical components that a warranty would not cover.

Tracking

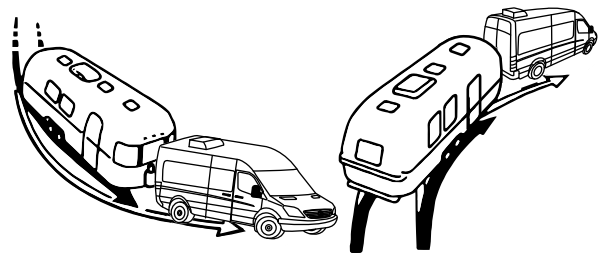

During practice, observe that the tracks made by the trailer wheels are distinctly different from those made by the tow vehicle. Studying this will make it easier for you to correct mistakes. Consider truck- or trailer-type fender or door grip rear view mirrors for maximum visibility. In most states, the law requires them.

After thoroughly inspecting your hitch, brakes, and tires, you should be ready to tow. Check traffic, signal that you are about to pull away, and start slowly. Look often in your mirrors, observe the action of the trailer, and then carefully move into the proper lane of traffic. Remember that the trailer wheels will not follow the path of the tow vehicle wheels; therefore, wider turns are necessary when turning to the left or right.

On freeways or expressways, try to pick the lane you want and stay in it. Always maintain plenty of space between you and the car ahead, at least the length of the tow vehicle plus trailer for every 10 mph. Remember that in order to pass another vehicle, you will need longer to accelerate. You must also allow for the length of the trailer when returning to the right hand lane. On a two-lane road cars may be lining up behind

you because you are traveling at a lower speed. It is both courteous and sensible to signal and pull over at the earliest safe opportunity and let them pass.

⚠ WARNING

Take into consideration that when towing a trailer, the handling characteristics are different and less stable from those with operating the vehicle without a trailer. It is important to avoid sudden maneuvers. Sudden maneuvers may lead to loss of control over the vehicle-trailer combination.

Brake Controller

The brake controller (if so equipped) is activated when you apply the brakes of the tow vehicle. Your tow vehicle brakes will automatically apply the trailer brakes first when properly adjusted. This will help keep your tow vehicle and trailer in a straight line and make you stop as if you were driving the tow vehicle alone. If swaying or swerving should occur, briefly operating the controller separate from the vehicle brakes may help correct the situation. Practice this maneuver on a clear highway. Do not wait for an emergency and then grope for the controller.

When towing a trailer, you might encounter a temporary cooling system overload during severe conditions such as hot days when pulling on a long uphill grade, when slowing down after higher speed driving, or driving long idle periods in traffic jams. If the hot indicator light comes on, or the temperature gauge indicates overheating and you have your AC turned on, turn it off. Pull over in a safe place and put on your emergency brake. Don't turn off the engine. Increase the engine idle speed. Lift the engine hood and check for fluid leaks at the radiator overflow outlet. Check to see that all drive belts are intact and the fan is turning. If you have a problem have it fixed at the next opportunity. If there is no problem the light should go off or temperature should come down within one minute. Proceed on the highway a little slower. Ten minutes later resume normal driving.

NOTICE

If the transmission continually shifts between gears on inclines, manually shift to a lower gear. A lower gear and reduction of speed reduces the chances of engine overloading and/or overheating. When going down a long hill, shift into a lower gear and use the engine's braking effect. Avoid riding the brakes, thus overheating the vehicle and trailer brakes. If the engine coolant rises to an extremely high temperature (e.g. coolant temperature needle approaching the red zone) when the AC is on, turn off the AC. Engine coolant heat can be additionally vented by opening the windows, switching the climate control fan speed to high and setting the temperature control to the maximum hot position.

⚠ WARNING

Never open a radiator cap when the tow vehicle is hot. Add coolant when the vehicle is cool.

⚠ WARNING

On slippery pavement, do not use engine drag to help slow down as this may cause the rear wheels of the tow vehicle to skid. On icy pavement, drive slowly and if you feel the tow vehicle skidding, gently apply the trailer brakes only. This will bring the tow vehicle and trailer back into a single line. Chains do not help trailer wheels.

When going downhill in dry weather, downshift so that engine compression will slow the whole rig down. Take dips and depressions in the road slowly and do not resume normal driving speeds until you are sure that the trailer wheels are clear of the dip.

When driving in mud and sand, let the momentum carry the rig through. Apply power gently and use as little as possible. Stay in the tracks of the vehicle ahead and keep the tow vehicle in the highest possible gear. If you are stuck, it is best to tow out the entire rig together without unhitching.


Despite even the best hitch, you will notice that whenever a large bus or truck overtakes your rig the displaced air first pushes the trailer rear slightly to the right and then affects the front. It may be necessary to steer very slightly, momentarily, toward the bus or truck to help compensate for the sway induced by the passing-vehicle. Do not apply the vehicle brakes, as this can tend to exaggerate the situation. You may find, however, that briefly applying the trailer brakes with your manual control will help eliminate sway.

⚠ WARNING

CHOCK THE TRAILER WHEELS when stopping on a hill or slope. Leaving your tow vehicle in gear is not enough for standstill safety. Do not use trailer brakes as parking brakes.

Backing Up

In BACKING UP the important thing to remember is to DO EVERYTHING SLOWLY and to correct immediately if you see the trailer turning the wrong way. Concentrate on the rear of the trailer. With your tow vehicle and trailer in a straight line, back up slowly and turn the bottom of the steering wheel in the direction you want the trailer to go. Watch from the window or in the mirror until the rear of the trailer is pointing in the desired direction. Your tow vehicle will be following the trailer in an arc. Straighten the tow vehicle and trailer by turning the steering wheel more sharply, and then when they are in line, straighten the steering wheel.

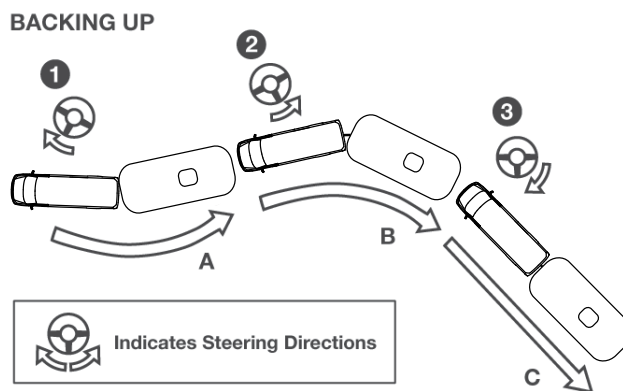

Start in position (A) start. Turning steering wheel as shown in (1). will put you in trailer position (B). Turning steering wheel show in position (2) puts you in trailer position (C). Steering position (3) returns front wheels to straight backing.

NOTICE

Always try to back to your left because the visibility is much better.

When you do not make it on the first try it is usually much easier to pull forward to your original straight position and start over.

If your spouse or traveling companion normally directs you when backing they should position themselves forward of the tow vehicle so the driver can easily see them. Their directions should always indicate to the driver the direction the rear of the trailer should go. A little practice in a parking lot with the person giving directions can save a lot of frustration when backing into a campsite.

Rearview and Side Monitor System

The vehicle is equipped with an advanced camera monitoring system designed to enhance visibility and safety. A high-definition digital display replaces the traditional rearview mirror, providing a clear and adjustable view. The center button activates a full display mode, while additional up/down controls allow for vertical adjustments to improve visibility down the road. The rearview mirror camera features night assist, improving visibility in low-light conditions while driving.

Side cameras are integrated into the vehicle's mirrors and automatically activate with the turn signals, providing a low-light view similar to traditional mirrors.

The backup camera, which is displayed on the in-dash screen when the vehicle is in reverse, is equipped with night vision, making it particularly effective for reversing and hitching at night. The backup camera display also includes a 3D perspective of the vehicle's surroundings, with proximity alerts using green, yellow, and red indicators, accompanied by audible tones to warn of nearby obstacles.


The system incorporates multiple sensors to detect potential hazards. Lower sensors monitor ground-level obstacles, while upper sensors help detect overhead objects, providing an added layer of protection against unseen obstructions.

⚠ CAUTION

Before using the camera monitoring system, carefully read and understand all manufacturer instructions provided in your owner's packet.

Passing

Extreme care must be exercised when passing another vehicle. A vehicle with a trailer attached will require additional passing distance than when driving without a trailer. Because your vehicle and trailer is longer than your vehicle alone, you will also need to go much further ahead of the passed vehicle before you can return to your lane.

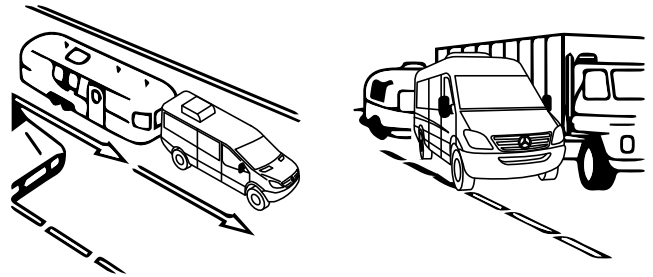

Parking Your Touring Coach

To reduce the risk of personal injury or damage to the vehicle power train as a result of vehicle/trailer movement, always:

- Keep right foot on the brake pedal.
- Shift gear selector lever to position "N".
- Have a second person place wheel chocks on downhill side of left and right trailer wheels.
- Slowly release brake pedal allowing vehicle and trailer to roll into chocks until stopped.
- Using the manual parking brake beside the driver's seat. Lift the brake lever slightly while pressing the button, then press the lever to the floor.
- Move gear selector lever to position "P".
- On inclines, turn wheels toward the road curb.

Towing Your Touring Coach

See the Mercedes-Benz Sprinter Operators Manual for towing information.

⚠ WARNING

Considerable damage may occur if the touring coach is improperly lifted for towing purposes.

Only qualified professional towing service companies with proper equipment should be used. Observe all cautions and warnings in the Mercedes-Benz Sprinter Operator's Manual before towing your touring coach.

Safety Check List

Your Airstream Touring Coach should be given a thorough safety check before a trip. Regular use of the following list will provide safe operation of your touring coach and will help you spot any malfunctioning equipment and correct the problem as soon as possible. The list is to help you and may not be all-inclusive.

⚠ WARNING

Failure to heed the following items may cause damage to the vehicle or personal injury.

Exterior Check List (Before Entering Vehicle)

1. Check condition of tires and keep tires at recommended inflation pressure per the tire and loading placard on the driver's door B-pillar.
2. Check that macerator hose, city water hookup, TV cable/satellite, power cord, and all exterior components are unhooked and properly stowed.
3. Check that all external compartment doors are properly closed, latched and locked.
4. Check that items stored on exterior of vehicle are securely tied down.
5. Verify if any items stored on exterior of vehicle would present a clearance problem.
6. Follow all automotive manufacturer's recommendations on checking and filling fluid levels.
7. Check exterior lights and general condition of vehicle.

Interior Check List (Before Driving)

1. It is important that all doors be completely closed and locked during travel.
2. Turn off the water pump and close all faucets.
3. Check that refrigerator door is closed and latched if equipped.
4. Check that nothing heavy is stored in overhead or high cabinets, which could fall out and cause injury. Heavy items should be stored in lower cabinets.
5. Stow galley slide shelf and pedestal tables.
6. Check that counter tops, cooktop, and shelves are clear of even small items that could become projectiles during an emergency braking or accident.
7. Latch the shower doors.
8. Do not cook unless the touring coach is parked and stable. Hot food or liquid could scald due to a sudden stop or accident while traveling.
9. Check that any internal stowage is securely held in place.
10. Check that lights and switches are set in positions safe for travel.
11. Adjust the driver's seat so that you can easily reach and operate all controls. Make sure seat is locked in position. Do not adjust driver's seat swivel or recline mechanisms while vehicle is moving. The seat could move unexpectedly causing loss of control.
12. Check that all passengers have seat belts on properly.
13. The freedom of movement of the brake and accelerator pedals must not be impaired in any way.
14. Check rear view mirrors adjustment, inside and outside. Adjust window coverings if necessary for maximum visibility.
15. Secure children in a federally-approved child restraint device.

AIRSTREAM®

Section 9 MAINTENANCE

MAINTENANCE SCHEDULE	9-2	WINTERIZING AND STORAGE	9-8
AIRSTREAM SERVICE AND PARTS	9-3	Touring Coach Winterization	9-8
TIRE CARE	9-3	Component Locations for Winterization	9-8
Tire Care Tips	9-3	Instructions for Winterization	9-9
Tire Inspection and Storage	9-3	Optional-Additional Steps for Winterization	9-9
PLUMBING	9-4	Water Heater Winterizing	9-10
Water System (Self-Contained)	9-4	Macerator Pump Winterizing	9-10
Water Pump and Strainer	9-4	Vehicle Storage	9-10
Cleaning the Strainer	9-5	Restoring Service	9-10
Disconnecting the Strainer/Water Pump Lines.	9-5	Toilet	9-11
Sanitizing	9-5	Toilet Winterizing	9-11
Sanitizing the Fresh Water Tank.	9-5	Maintenance	9-11
Sanitizing the Fresh Water System	9-5	Exterior Door	9-11
DRAIN AND WASTE SYSTEM	9-6	Lubrication	9-11
Macerator Pump	9-6	Adjustments	9-11
Emptying the Holding Tanks	9-7	ELECTRICAL DIAGRAMS	9-12
Macerator Impeller Release Feature	9-7	12-Volt Main Schematic	9-12
Manual Operation	9-7	30-Amp 120-Volt Schematic - USA and Canada	9-21
Extended Stays	9-7	Audio/Video Schematic	9-22
Waste Tank Flush	9-8	FRESH WATER LAYOUT	9-23
Drain System Cleaning	9-8	FAQS AND ANSWERS	9-24

Maintenance

Maintenance Schedule

⚠ WARNING

Failure to maintain your touring coach can cause premature and unexpected parts breakage and/or erratic operation that may be hazardous.

NOTICE

See appliance manufacturer's literature for further information.

Every 1,000 miles or 60 days

Smoke and CO Alarm	Test and replace battery as required.
Tires	Check tire pressure.
GFCI Circuit Breaker	Test and record.

Every 10,000 miles or 6 months

Tires	Inspect and rotate.
Windows, and Door Seals	Clean with mild detergent and apply 303 Aerospace Protectant
Exterior	Wax

Once a month

Hydronic System	Run the burner for at least 15-20 minutes to help maintain the system.
-----------------	--

Every year

Hydronic System	Test alkalinity in the system coolant and inspect the exhaust system for damage.
Seams	Check and reseal exterior seams, windows, lights, and vents as needed.
Interior Cabinets	Visual inspection of latches and locks, hinges and slides. Silicone spray as needed.

Every 5,000 miles or 90 days

Door Step	Lubricate and inspect moving parts.
Exterior Latches and Hinges	Lubricate with light household oil.
Wheel Fasteners	Torque to Specifications; see Specifications on page 4-3
7-Way Plug	Spray with contact cleaner.
Exhaust fans	Clean fan blades and wash filter, if supplied

Once every three years

Hydronic System	Replace Heat Transfer Fluid/ Century Chemical Boiler Antifreeze
-----------------	---

Mercedes-Benz Sprinter Van

Refer to your Sprinter Operator's Manual for important engine and vehicle maintenance intervals and adhere to onboard service notifications. Review the Sprinter manual's information and notes on maintenance, fuel grades, and Mercedes-Benz-approved operating fluids before refueling or servicing.

Airstream Service and Parts

Please contact an Airstream dealer service center to schedule maintenance and obtain replacement parts; see [Service Centers on page 3-5](#).

NOTE

Availability of parts and service may vary. Some parts may occasionally be delayed, back-ordered, or replaced with compatible alternatives.

Replacement parts for dealer service and repair and common items such as filters and hardware can be found in the parts book specific to your Airstream model.



Airstream parts books are posted on our website as soon as they're finalized, typically around the midpoint of model year production. Scan this QR code or visit <https://www.airstream.com> and navigate to the owner's section to locate the parts book for your model Airstream.



Airstream Supply Company is your trusted source for Airstream-approved cleaners, polishes, and other care products and supplies needed to properly maintain your Airstream's interior and exterior. Scan this QR code to visit and explore our assortment of RV care products and camping supplies at <https://airstreamsupplycompany.com>.

Tire Care

The most important function of tires is to provide traction while moving and grip when steering or stopping. The tires on your touring coach are designed for highway use and must be properly maintained in order to maximize tire life, as well to provide a safe mode of transportation. For information on changing a tire and tire inflation, see [Tires on page 7-4](#).

Tire Care Tips

To reduce the risk of tire failure, we strongly recommend the following:

1. Check the pressure in your tires at least monthly when the tires are cool (after the vehicle has been stopped for 3 hours and then driven less than 1 mi). Do not reduce pressure when tires are hot. Use a tire gauge to check pressure and maintain it at the recommended level.
2. Never overload your tires. Heed the maximum load-carrying capability of your tires.
3. Check your tires frequently for scrapes, bulges, separations, cuts, or snags resulting from use. See

your tire dealer immediately if any such condition is discovered.

4. Never operate your vehicle in excess of lawful speeds, the maximum speeds justified by driving conditions, or in excess of speeds recommended for the tires you are using.
5. Make every effort to avoid running over objects that may damage the tire through impact or cutting, such as chuck holes, glass, metal, etc.
6. Never drive on smooth tires. Tires should be removed when 2/32 in. of tread depth remains. In most states, it is illegal to drive with less than 2/32 in. remaining tread depth.
7. Park out of the sun whenever possible when in warm climates. In desert regions, use tire covers to prevent ultra violet light deterioration to tires.

Tire Inspection and Storage

Before taking your touring coach on a trip or when removing it from an extended storage period, make it a practice to inspect the overall condition of your tires. Check for any type of condition or damage that might result in failure. A thorough check should include both inside and outside sidewalls, tread area, and the condition of hardware such as valve stems, valve caps, and wheels. The tread should be checked for any unusual wear, cracking, penetrations, and/or cuts. An uneven wear pattern can indicate misalignment or worn suspension parts.

Since many touring coach's are used seasonally and sometimes stored for extended times, it is possible that tires will take many years to wear out. Tires, as any rubber product, will age over time. If tires show cracking in the sidewall or tread surfaces that are more than 2/32-in. deep, they should be replaced before your next trip or vacation. Store your touring coach in a cool, dry area away from major heat sources and extreme cold. An enclosed storage area is best with no exposure to electromagnetic sources such as generators or transformers. If you must keep your touring coach outside, cover your tires from direct sunlight. Take your touring coach to your tire dealer for service to check or correct any of these conditions.

⚠ WARNING

Wheel fastener torque must be checked immediately after reinstalling a wheel and again after 30 miles. Torque all wheel fasteners evenly to specification using the proper sequence; see [Wheel Bolt/Lug Nut Tightening on page 7-8](#). For torque values, see [Specifications on page 4-3](#).

Plumbing

Water System (Self-Contained)

The fresh water system consists of a city water hookup, fresh water tank and drain valve, water pump, hot and cold water lines, hydronic heating and hot water system, and faucets. Full explanations on the locations and use of these features are explained in this section.

Before using the water system, check that the water heater bypass valve is turned to the use position. Make sure the fresh water tank drain valve is closed; [see Component Locations for Winterization on page 9-8](#).

The water tank can be filled by connecting a potable water hose to the city water inlet and turning on the fresh water valve switch. A high-pressure RV/Marine FDA approved drinking water hose of at least ½-in. diameter made from material that is tasteless, odorless, and non-toxic should be used. It's a good idea to let the water run through the hose for a short time to flush it out. RVers sometimes fill their tanks with "home" water to avoid strange water that may be distasteful to them on short outings. Remember, the more water you carry in the Fresh Water tank, the less cargo carrying capacity you have for other items. The amount of water in the tank may be checked on the Multiplex Control Panel. The fresh water valve switch will automatically turn off when the tank is full.

Because the water heater is tankless, it does not need to be filled. However, if the system has not been used for some time or is being used for the first time since draining the lines it is normal for air to have gotten into the lines. To expel the air, open the hot side of either the galley, wet-bath, or exterior shower faucet and turn on the water pump or connect to an exterior city water source. Close the cold side of all faucets. For some time the open faucet will only sputter. This is because the air is being pushed out through the lines. Once the air is expelled, a steady stream of water will come from the faucet.

Now, open a cold faucet. It will sputter for a short time, but will soon expel a steady stream. All other faucets can now be opened until all air is expelled.

Once the system is filled with water and the faucets are closed, the water pump will shut off. When a faucet is opened, the pump will come back on automatically. If the faucet is just barely open, it is normal for the pump to cycle on and off rapidly.

It is normal for a pump to occasionally cycle when all faucets are off to keep the water pressure at the set point. However, if it cycles frequently (e.g. more than a few times an hour) the plumbing system, pump, and pump strainer should be checked to be sure it is not losing pressure through a slow water leak or back through the pump.

NOTICE

To prevent equipment damage, the water heater should only be started after the water system is primed and ready for use.

NOTICE


Road vibration may force a faucet open in transit. Ensure the pump is OFF prior to travel.

Water Pump and Strainer

The water pump is controlled by the Multiplex system. When turned on, the water pump's controller maintains a consistent regulated water pressure and steady water flow based on demand.

To locate the water pump, [see Component Locations for Winterization on page 9-8](#).

The water pump is typically left off when hooked up to a city water supply. However, if city water pressure is lower than desired the water pump can be turned on to facilitate increased water pressure, provided there is a supply of water in the fresh water tank. The tank will be depleted by the amount needed to supplement the flow of city water.

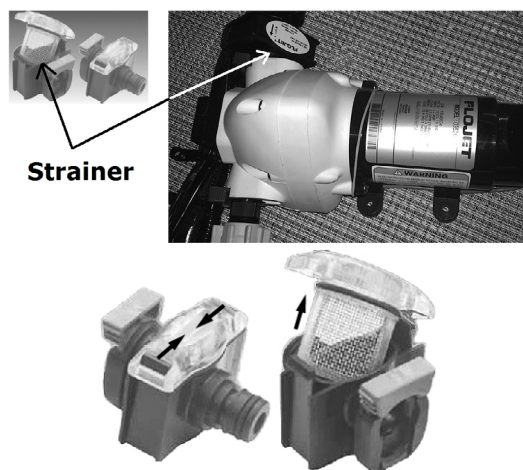

NOTE

If water flow is interrupted, check the water supply and turn the pump off and back on.

Cleaning the Strainer

Visually inspect it for accumulation of dirt/debris that could affect water flow and clean as needed:

1. Rotate the strainer housing to a position allowing access to the clear-view screen retainer and the tabs holding it in place.
2. Pinch the tabs inward to release the clear plastic retainer (as shown on previous page).
3. Pull the retainer and screen out of the housing for cleaning. Rinse all debris from the screen.
4. Replace the screen assembly by aligning the screen in the seating grooves and pressing down gently until the tabs are back in place.

Disconnecting the Strainer/Water Pump Lines

The inlet and outlet hoses and the strainer assembly are held in place by self-sealing, blue, quick-connect fittings:

1. Grasp the blue tab on the female fitting by the grooved finger edges and pull straight out on the tab to release the male fitting.
2. Be sure that both the female and male fittings on the disconnect are free of all debris and damage before replacing them.
3. Check the pump system for leaks when reinstalling the disconnect fittings.

NOTICE

Failure to check the quick disconnect fitting for water leaks when reinstalling inlet and outlet hoses or the water pump strainer may cause the system to leak, causing damage to personal property.

Sanitizing

Airstream recommends sanitizing the fresh water system before and after storage, after installing new components, and whenever contamination is suspected. How often to sanitize—and what solution to use—depends on how frequently the RV is used, the taste and quality of the water, and the environments it has been exposed to, such as extreme heat, high humidity, or questionable water sources.

Use a sanitizer that effectively disinfects without damaging system components. While bleach is widely used for its ability to kill bacteria, viruses, fungi, and some protozoa, it can also corrode metal and degrade seals. In some configurations, susceptible components like the water heater cannot be bypassed, meaning the solution will circulate through the entire system. To

avoid damage, Airstream generally recommends using an RV-specific fresh water system cleaner formulated to be safe for all fresh water system components. Follow the product's instructions for dilution and contact time.

If contamination is severe, bleach may be necessary. Refer to your water heater's manual for additional information. If bleach is not recommended, bypass the water heater whenever possible, and flush the system thoroughly when finished. Use the standard sanitization formula: 0.13 ounces of household bleach per gallon of water, or 1 milliliter per liter. This produces a 50 ppm free chlorine solution, consistent with RVIA ANSI A119.2 and widely accepted potable water disinfection practices.

Refer to the sanitization procedure that follows to introduce the solution into the system.

Sanitizing the Fresh Water Tank

1. Determine the amount of solution you need for your fresh water tank's capacity; [see Specifications on page 4-3](#).
2. The fresh water tank sanitization kit is located behind the drawer of the roadside bed. Remove the drawer to access the kit through the drawer cavity. The kit has a clear plastic tube. Feed the tube through and attach a funnel.
3. The kit's valve is at the end of the tube and may require careful maneuvering around components to gain access. Open the valve and carefully pour a one gallon concentrate into the funnel to gravity feed it into the fresh water tank. Immediately fill the tank using a city water connection to dilute the concentrate to the proper sanitization ratio.
4. Leave the solution in for the product's recommended contact time (4 hours for bleach). Drain the tank, refill from the city water connection, and drain again. Repeat until the solution is flushed out.

Sanitizing the Fresh Water System

It is possible to sanitize the system using the steps above to fill the tank and then fill the system using the water pump. However, if you are only sanitizing the lines, a simplified method is to use the winterization kit in combination with the water pump to pull sanitizing fluid from containers. Mix 2-3 gallons of sanitizing solution. To introduce the solution follow the [Optional-Additional Steps for Winterization on page 9-9](#). Leave the solution in for the product's recommended contact time (4 hours for bleach). Thoroughly flush the system with fresh water using a city water connection.

Drain and Waste System

Your touring coach has a Drain and Waste System, including holding tanks made from corrosion-free, molded plastic, and trouble-free dump valves. The waste water holding tank lets you use the toilet for several days before it needs emptying at an approved disposal facility.

Sink, shower, bath, and lavatory wastewater drain into the gray water holding tank. Wastewater from the toilet drains into the waste water holding tank. Each tank has a dump valve that drains through a common outlet so only one waste hose connection is needed when connecting to a disposal site.

Monitor tank levels on the multiplex system home page. The tank level monitoring system also includes a primary control panel installed for system access and diagnostics; [see Service-Access Control Panels on page 5-17](#). When the waste water holding tank is completely full, the toilet bowl cannot be emptied. If the gray water holding tank is overfilled, drain water will back up into the shower floor pan, resulting in unsanitary conditions.

⚠ CAUTION

Failure to monitor holding tank levels could result in unsanitary wastewater overflow.

Never drain the tanks at any place other than an approved dumping station. Almost all campgrounds will have a dump station. Park directories like Woodalls and Rand McNally list dumping stations, and the GPS navigation system may be able to locate nearby dumping stations or highlight stations along your route.

NOTICE

Do not use a pipe snake on clogged drains, as it could damage internal drain system components.


NOTICE

Never flush hard or solid objects, sanitary napkins, facial tissue, or paper towels down the toilet and into the holding tank. They will not macerate and will jam the dump valve and macerator pump impeller mechanisms.

NOTE

Colored toilet tissue is slower to dissolve than white. Most RV supply stores and some common retailers offer tissue designed for RVs that will completely dissolve.

Macerator Pump

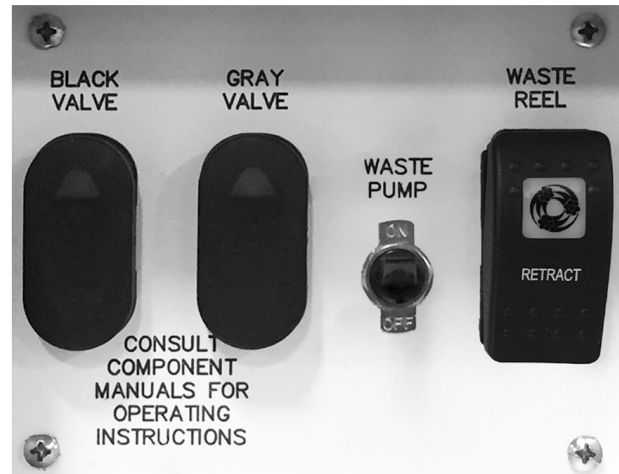

The macerator grinds waste to a particle size of approximately 1/8" to pump all waste and tissue typically found in a recreational vehicle waste system.

The high-pressure waste hose used for emptying the waste water tank is stored on an motorized reel in a compartment on the roadside exterior. It has a threaded, drip-proof valve with a versatile, two-size threaded adaptor. The adaptor allows the valve to be connected to three sizes of threaded disposal inlets, including an exterior home sewer clean-out. The adaptor snaps over the valve threads. A rubber ring is also provided to lodge into a non-threaded inlet. Airstream recommends using a weight to secure the hose if the rubber ring is loose.

The roadside utility compartment above the hose compartment has individual switches for each holding tank, the macerator pump, and the hose reel. Each valve switch has a light that illuminates to indicate that the valve is open.

NOTICE

Do not run the Macerator pump dry for more than 30 seconds or run it continuously for more than 15 minutes. Doing so will damage the pump.

Emptying the Holding Tanks

1. Open the hose compartment door and pull out the high-pressure waste hose. Using the appropriate adaptor, secure the hose at the disposal inlet and verify that it is secure before turning on the pump.

⚠ CAUTION

If not properly secured, pump pressure may force the waste hose to disconnect while pumping wastewater, resulting in unsanitary conditions. Watch all connections while dumping. If a leak occurs, turn off the pump, close the dump valve, and close the hose's drip-proof valve.

2. Verify the hose is secured and open the drip-proof valve on the end of the hose.
3. Open the waste water holding tank valve. Press and hold the rocker switch (labeled Black Valve) in the UP position until the switch illuminates (2-3 seconds), indicating the valve is open.
4. Turn on the macerator pump (waste pump). Watch all connections while dumping. As soon as the waste water tank is empty, turn off the pump.
5. Close the waste tank valve (press and hold the rocker switch DOWN until the light extinguishes).

NOTE

Only one valve at a time can be open.

6. Flush the waste tank; [see Waste Tank Flush on page 9-8](#).
7. Open the gray tank valve.
8. Turn on the macerator pump. Run the pump until just before it runs dry. Any trickle of gray water left will remain in the discharge hose behind the drip-proof valve.
9. Close the gray tank valve.
10. Close the hose's drip-proof valve and remove the hose from the disposal facility inlet. Grasp the hose to prevent slack, and then press and hold the retract switch to reel it in. Guide the hose side-to-side so it spools onto the reel evenly.

NOTE

Always empty the waste water tank before emptying the gray water tank. The gray water will help flush the pump and hose of wastewater.

Macerator Impeller Release Feature

Impeller Release Feature



After long periods of non-use, a stuck impeller can be easily broken loose with a screwdriver inserted in the motor shaft slot. Remove the rubber boot, turn the shaft clockwise, and replace the rubber boot. The impeller can usually be found under the touring coach, near the macerator hose reel.

Manual Operation

In case the electric dump valves fail to open, manually pull/push the arm once, to open and close the valve. The manual arm located under the vehicle, near the macerator hose reel.



Extended Stays

When you are in a park with a disposal facility, empty the tanks every few days or whenever they become almost full. Pumping a large volume of liquid through the tanks at a time will keep toilet paper and other solids completely washed away. Remember to empty the waste water tank first and then the gray water tank using the gray water to flush the system. This practice will help avoid the accumulation of solids in the tank, which could lead to an unpleasant cleaning job.

Should solids accumulate, fill the tank about half full with water using the waste tank flush inlet and then drive the touring coach for a few miles. Don't wait until the tank is packed solid. The turbulence and surging of the water will usually dissolve the solids into a suspension so the tank can be drained. Draining the tanks as described will protect them from freezing during storage.

Waste Tank Flush



Airstream advises flushing the waste water holding tank each time it is emptied to prevent clogging of the water jets and accumulation of waste solids inside the tank. Start by emptying the holding tanks at an approved dump station, close the waste tank valve, and leave the macerator hose connected to the drain. To flush the tank:

1. Attach a water hose to the flush inlet inside the hose compartment (do not use the fresh water tank hose). Turn the water on and monitor the waste tank level. Fill the tank about half full and turn the water off.
2. Empty the waste holding tank; [see Emptying the Holding Tanks on page 9-7](#).
3. Close the waste holding tank valve and repeat this process until the water runs clear.
4. Close the hose's drip-proof valve and remove the hose from the disposal facility inlet. Grasp the hose to prevent slack, and then press and hold the retract switch to reel it in. Guide the hose side-to-side so it spools onto the reel evenly.

Drain System Cleaning

The only cleaning agents that can be used without causing harm to the system are household ammonia and tri-sodium phosphate in small quantities. Do not use any product that contains any portion of petroleum distillates. This type of product will attack the rubber seals of your toilet and dump valve. Also, do not use any dish detergent or abrasive cleaners. All products should be marked as approved for ABS drain systems.

Winterizing and Storage

When storing your touring coach, use the same precautions as you would in your own home in regard to perishables, ventilation, winterizing, and rain protection. In addition, for prolonged storage periods, flush out all the drain lines and waste holding tanks. Also, drain the entire water system and the fresh water tank. Instructions for draining the water system are explained in the following paragraphs on winterizing.

The main consideration in winterizing is to guard against freezing damage to the fresh water lines, the waste drain lines, the waste holding tanks, the hydronic heating and hot water system, and the batteries.

NOTICE

Sprinter recommends disconnecting the current to all chassis electric consumers using the engine battery disconnect cable if the vehicle sits for periods longer than 30 days. This will save jump starts, battery charge ups, and possible battery damage and replacement. The Mercedes-Benz Sprinter Operator's Manual describes its location, operation, and cautions in detail.

NOTICE

In very cold weather, winterizing the motor coach is recommended to prevent damage to the waste systems.

Touring Coach Winterization

To perform these steps, you will need an adapter with an air regulator to connect an air compressor to the city water inlet, and access to an air compressor. Adapters are available at most RV stores.

Component Locations for Winterization

Fresh water tank/low-point drain valve - under the touring coach; between the wheels (rear side of tank).

Hydronic water heater bypass valve - Under the roadside bed near the top of the timberline unit at the water lines.

Water pump - under the galley sink, accessed by opening the cabinet door and removing the cabinet floor panel.

Winterization kit - under the galley sink, accessed by opening the cabinet door and removing the cabinet floor panel.

Instructions for Winterization

1. Level the touring coach from side to side and front to rear, turn the water pump OFF, and disconnect the city water.
2. OPEN all the hot and cold water faucets.
3. OPEN the fresh water tank/low-point drain valve.
4. Allow all water to stop draining and proceed to the next step.
5. For this step, you will need someone to operate the toilet foot pedal/flush valve. Using the air compressor, apply at MAX 30 PSI of air pressure at the city water inlet until no water remains in the system. Operate the foot pedal on the toilet. You may need to depress the pedal a few times to work out all the water by allowing some air pressure to build up between flushing. Once all the water has been blown from the system, disconnect the air and continue to the next step.

NOTICE

Do NOT exceed MAX 30 PSI when using compressed air to clear the system of water during winterization. Higher pressures may damage the water heater.

NOTICE

The MAX 30 PSI can be increased to a MAX 50 PSI if the hydronic water heater bypass valve has been set to its bypass position. CAUTION - if 30 PSI is exceeded with the bypass valve in the normal use position, the water heater could be damaged.

6. For this step, have a catch pan or a towel ready to place under the water pump outlet to prevent water from running out into the touring coach. Remove the quick-connect outlet fitting from the water pump. Turn the pump ON briefly to remove any remaining water from the pump head and lines running from the tank.
7. Check the water pump strainer to be sure no water remains.
8. If you plan to add RV antifreeze using the optional steps below, RECONNECT the water pump. Otherwise, leave the fittings from the pump disconnected until the system is ready to be used again. Best practice: leave a note as a reminder near the multiplex panel that the water pump is disconnected.


9. If you plan to add RV antifreeze using the optional procedure below, save this step for the end. Otherwise, Fully charge the house battery pack and turn off the battery disconnect switch.

Optional-Additional Steps for Winterization

An additional step to winterization is to consider adding a non-toxic RV antifreeze (approved for drinking water systems) to the water lines using the Winterization Kit to draw RV antifreeze into the water system, using the water pump.

Before beginning, read the RV antifreeze manufacturer's label for instructions specific to the antifreeze you plan to use. It may take a few gallons to fill the entire system so prepare accordingly. As you follow these steps, it will be helpful to have another person watching and operating the faucets, shower heads and toilet valve.

1. RECONNECT all lines and CLOSE all drain valves.
2. OPEN the sink and shower drains if they are closed.
3. Ensure all the water faucets and shower heads, hot and cold, internal and external, are OPEN.
4. Locate the Winterization Kit and uncoil the hose, and insert it to the bottom of the RV antifreeze fluid container; [see Component Locations for Winterization on page 9-8](#).

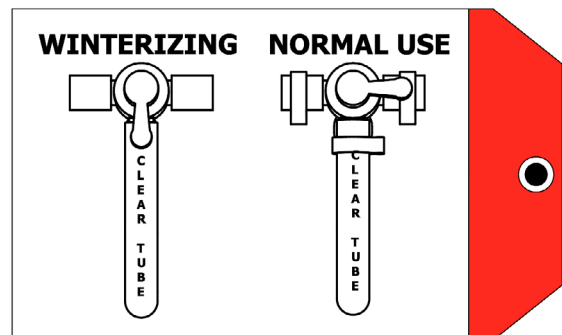

5. Turn the valve from NORMAL USE to WINTERIZE (as shown above).
6. Turn the water pump ON and run it until antifreeze starts coming out of the faucets. Once antifreeze is running from the taps you can start closing them. Move from one fixture to the next, shutting them off as you go until all the lines are full. Turn the pump OFF as you empty and transition from one antifreeze container to the next.

7. Allow the antifreeze to flow down drains. Flush the toilet and allow antifreeze to flow down the toilet. If equipped, operate the toilet hand sprayer until antifreeze is coming out. If equipped, work the hand shower sprayer while holding it down in the shower until antifreeze is coming out, and do the same with the external shower head. Dump any remaining small amounts of antifreeze down a drain.
8. Shut the water pump OFF once all the lines are full.
9. OPEN all the faucets and leave them open.
10. DISCONNECT the hose, rinse it out with fresh water and store.

NOTICE

Remove all RV antifreeze spillage from all sinks, drain pans, and faucet parts after winterizing. Failure to do so could damage surface finishes. Do not use water to rinse antifreeze down the drain as it will dilute the antifreeze.

11. Fully charge the house battery pack and turn off the battery disconnect switch.

Water Heater Winterizing

If the touring coach is to be stored during winter months, the water lines must be drained to prevent damage from freezing. Once drained, the water lines can be “blown out” by applying air pressure at the city water inlet or RV, non-toxic antifreeze can be added. The water heater only holds a couple of cups of water in the heat exchanger, which is drained with the low point drain valves.

Macerator Pump Winterizing

Plan your winterizing and storage ahead, and be sure the holding tanks are drained and flushed thoroughly. This is very important, as the frozen sewage and water could seriously damage the system. After dumping tanks, add RV, non-toxic antifreeze to one of the holding tanks and start the macerator pump. Run the pump until the RV, non-toxic antifreeze comes out the end of the pump hose, then close the dump valve. As extra protection, open the toilet valve and add RV, non-toxic antifreeze through the toilet into the waste water tank and pour RV, non-toxic antifreeze into a sink drain to protect the holding tanks, valves, and pump from residual water freezing.

Vehicle Storage

In addition to winterizing your coach, the following practices are recommended to prevent damage that can occur during storage:

- Because brake fluid absorbs moisture from the air, Mercedes-Benz recommends changing the brake fluid when the vehicle is not driven for long periods or when stored for over six months.
- Do NOT use any fuel additives for storage.
- Fill the fuel tank to FULL before storage and use diesel fuel with a bio-diesel content of 5% (B5) or less to avoid moisture buildup and contamination. Storing the vehicle with B20 fuel is not recommended as it may promote algae growth. Do not store the vehicle for more than 30 days with B20 diesel fuel in the tank.
- While it is not required, you may opt to change the oil before storage to flush out any contaminants.
- Move the vehicle regularly or use tire-saver ramps to help prevent flat spotting. Tires can be inflated to 80 PSI to help prevent flat spotting, but they must be inflated to the correct pressure before driving. Keep a note on the vehicle or with the keys as a reminder to adjust the tire pressure prior to driving. If tire-saver ramps are not used, move the vehicle a few feet periodically to avoid flat spotting.
- Clean the interior of the vehicle and remove all food and beverage items. Empty, clean, and turn off the refrigerator and leave the door open to avoid mold growth. If mice or other rodents enter the vehicle, they can chew through wiring and cause significant damage. Consider using a rodent repeller.

Restoring Service

1. Close the holding tank dump valve, water faucets, and fresh water tank/low-point drain.
2. Reconnect water pump line if disconnected.
3. Add water to the fresh water tank and turn the water pump on. Open and close faucet valves one at a time until water runs clear at all faucets signaling RV, non-toxic antifreeze is flushed out of lines. Go back and recheck water clarity at all faucets. Turn off the water pump.
4. Hook up city water, open faucet valves, and recheck water clarity.
5. Reset water heater bypass valve to normal operating position.

Toilet

Toilet Winterizing

Draining Method: Turn off the touring coach's water supply. Drain toilet bowl. Disconnect supply line at water valve. Completely drain the toilet's water supply line.

NOTICE

To avoid damage when using air pressure to blow water from the lines, make sure the toilet valve is in the open position.

NOTICE

If water is frozen in the toilet, do not attempt to flush until the ice thaws. Never use automotive type antifreeze.

Maintenance

If the bowl-sealing blade does not operate freely after extended use, it may be restored to its original, smooth operating condition by applying a light film of silicone spray to the blade. To clean the toilet use SeaLand® Toilet Bowl Cleaner or any other high grade, non-abrasive cleaner. Do not use highly concentrated or high acid content household cleaners. They may damage the rubber seals.

Troubleshooting

1. Leaks:
 - a. Back of toilet: check water supply line connection at water valve. Secure or tighten as necessary. If leak persists from water valve, replace.
 - b. Vacuum breaker leaks while flushing: make sure vacuum breaker stem is pushed fully into sealing grommet in back of bowl. If leak continues replace vacuum breaker.
 - c. Between closet flange and toilet: check flange nuts for tightness. If leak continues, remove toilet and check flange height. Replace flange seal.
2. Toilet won't hold water:
 - a. Check for and remove any debris from blade-ball seal track.
 - b. Check blade/ball seal compression mechanism. If blade/ball seal is worn, replace.

3. Harder than normal pedal operation: Apply light film of Thetford Toilet Seal Lubricant & Conditioner or silicone spray to blade/ball. (Note: To avoid damage, do not use spray lubricants other than silicone.)
4. Poor flush: The pedal must be held completely down to flush. A good flush should be obtained within 2 to 3 seconds. If problem persists, remove the water supply line and check flow rate.

Exterior Door

Lubrication

Apply a little paraffin or grease to the striker pockets and a slight amount of household oil to the lock mechanisms to keep the locks operating smoothly. Also, lubricate the hinge pins periodically with household oil. Use the lubricant sparingly and remove any excess immediately.

Adjustments

Door adjustments can be affected by:


- The coach being improperly leveled.
- Striker bolt alignment being out of adjustment, (striker bolt is adjustable).

Check the fit of your door before and after leveling. The fit of the door can be affected if the coach is not level side to side and front to back.





12-Volt Model Schematic

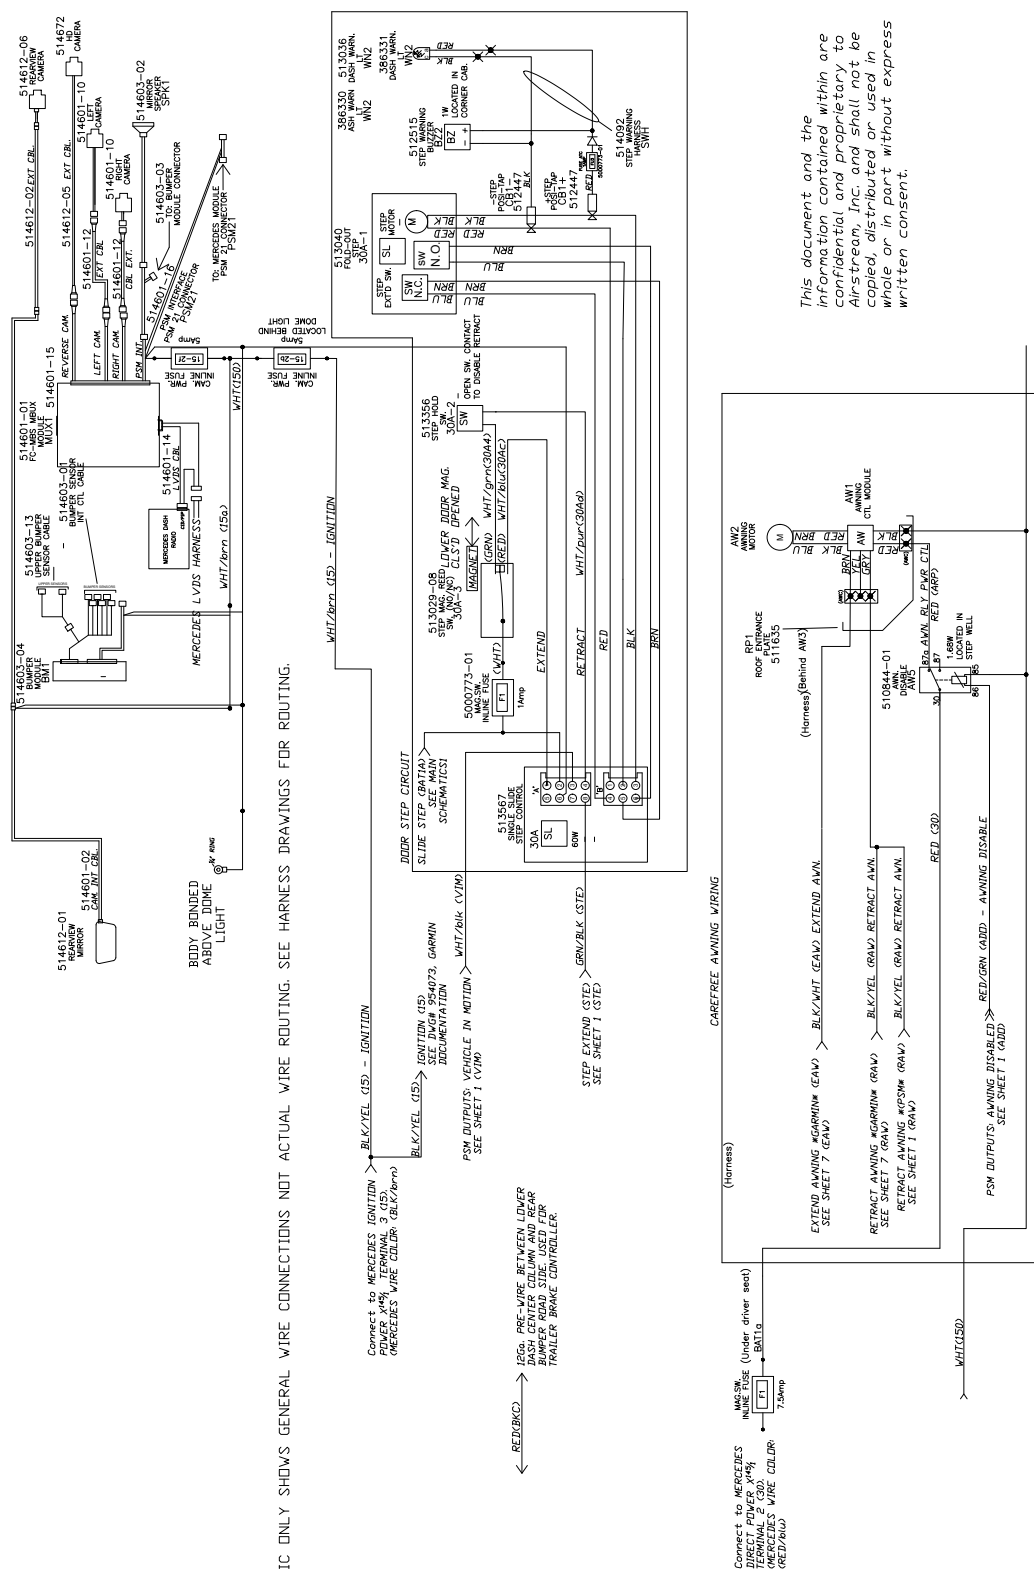


This document and the information contained within are confidential and proprietary to Airstream, Inc. and shall not be copied, distributed or used in whole or in part without express written consent.




Shows GENERAL WIRE CONNECTIONS NOT ACTUAL WIRE ROUTING. SEE HARNESS DRAWINGS FOR ROUTING.

This document and the information contained within are confidential and proprietary to Airstream, Inc. and shall not be copied, distributed or used in whole or in part without express written consent.

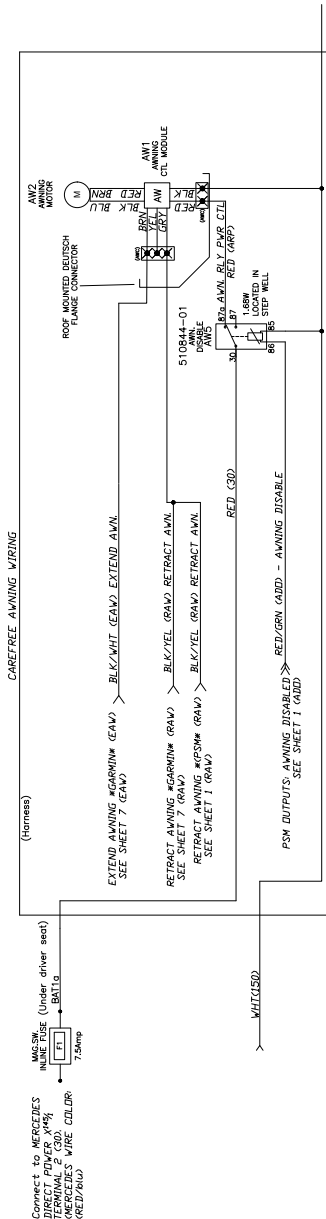


12-Volt Model Schematic

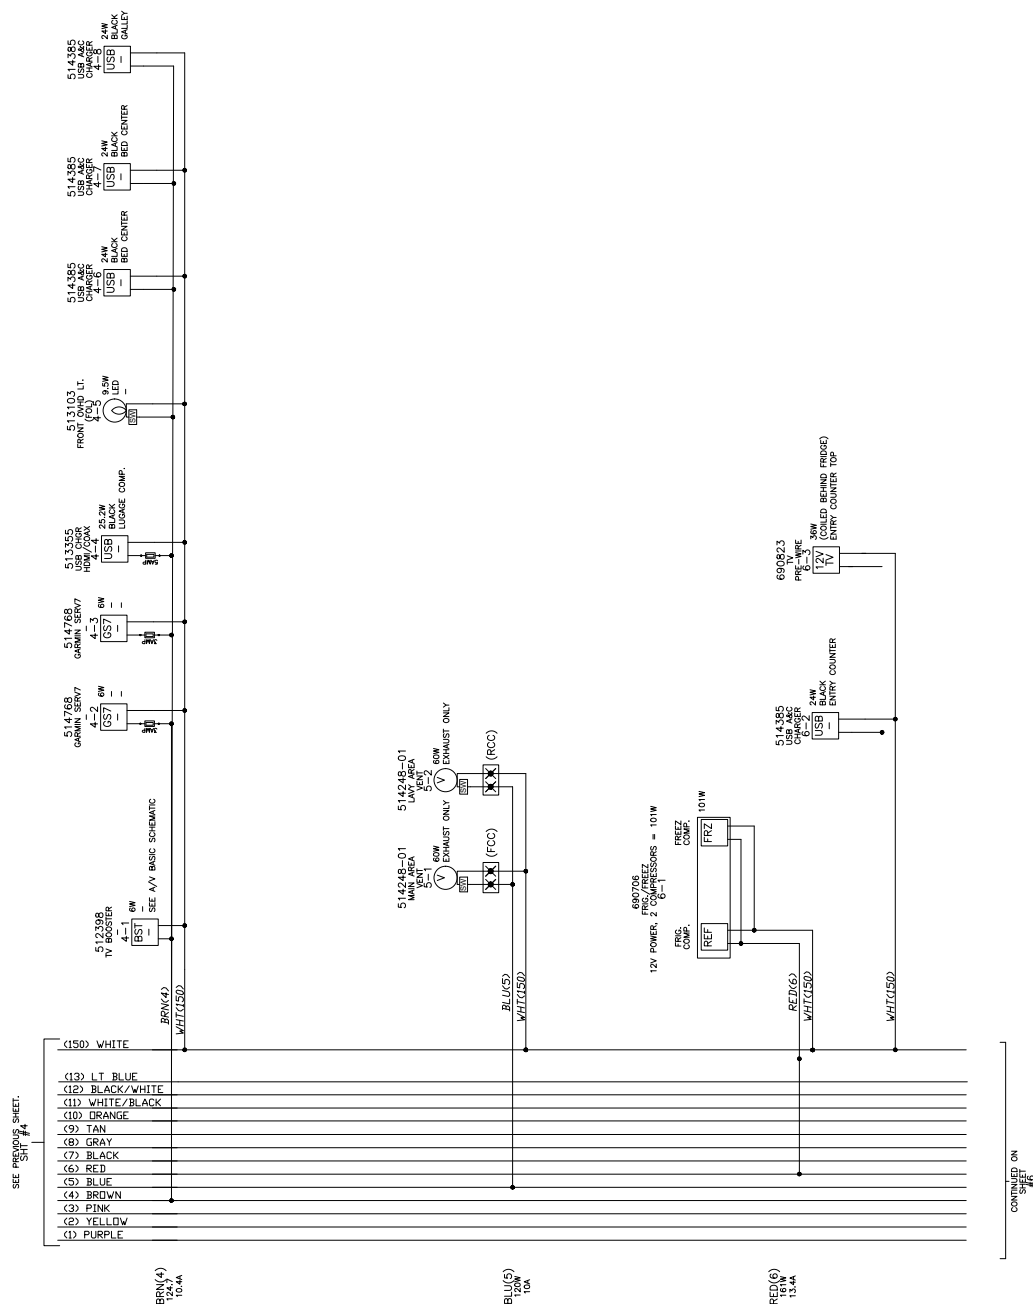

This document and the information contained within are confidential and proprietary to Airstream, Inc. and shall not be copied, distributed or used in whole or in part without express written consent.

* SCHEMATIC ONLY SHOWS GENERAL WIRE CONNECTIONS NOT ACTUAL WIRE ROUTING. SEE HARNESS DRAWINGS FOR ROUTING.

12-Volt Model Schematic

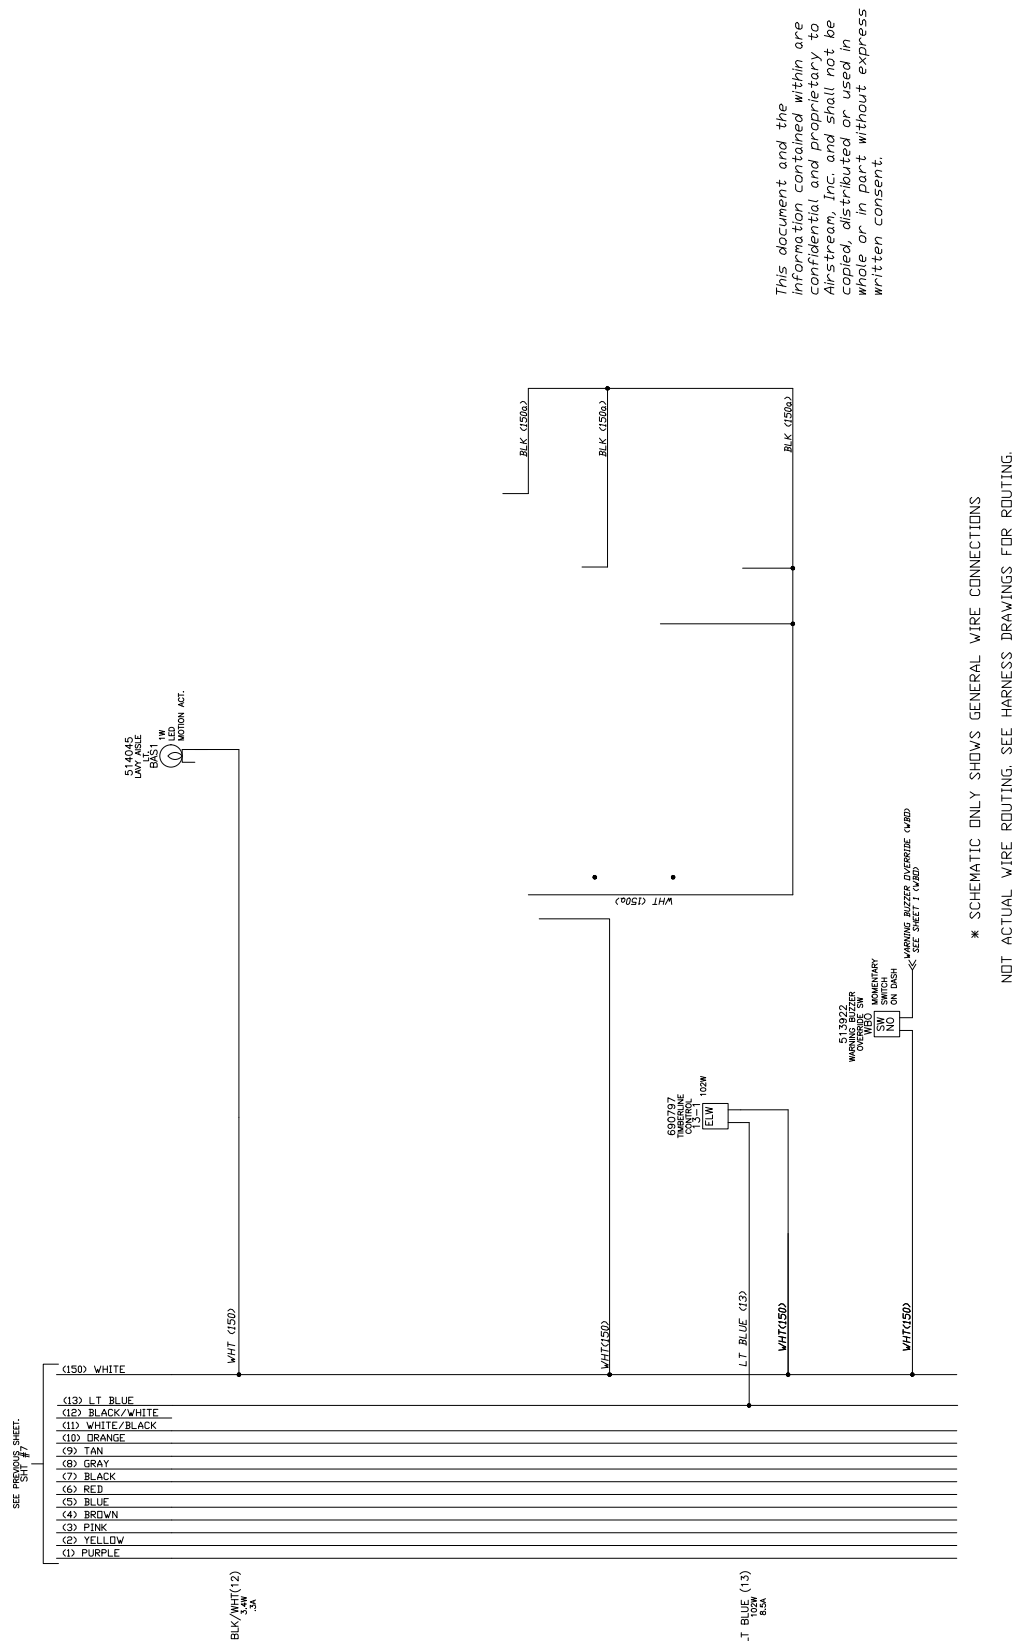


This document and the information contained within are confidential and proprietary to Airstream, Inc. and shall not be copied, distributed or used in whole or in part without express written consent.

* SCHEMATIC ONLY SHOWS GENERAL WIRE CONNECTIONS
NOT ACTUAL WIRE ROUTING. SEE HARNESS DRAWINGS FOR ROUTING.




This document and the information contained within are confidential and proprietary to Airstream, Inc. and shall not be copied, distributed or used in whole or in part without express written consent.




* SCHEMATIC ONLY SHOWS GENERAL WIRE CONNECTIONS NOT ACTUAL WIRE ROUTING. SEE HARNESS DRAWINGS FOR ROUTING.

30-Amp 120-Volt Schematic - USA and Canada

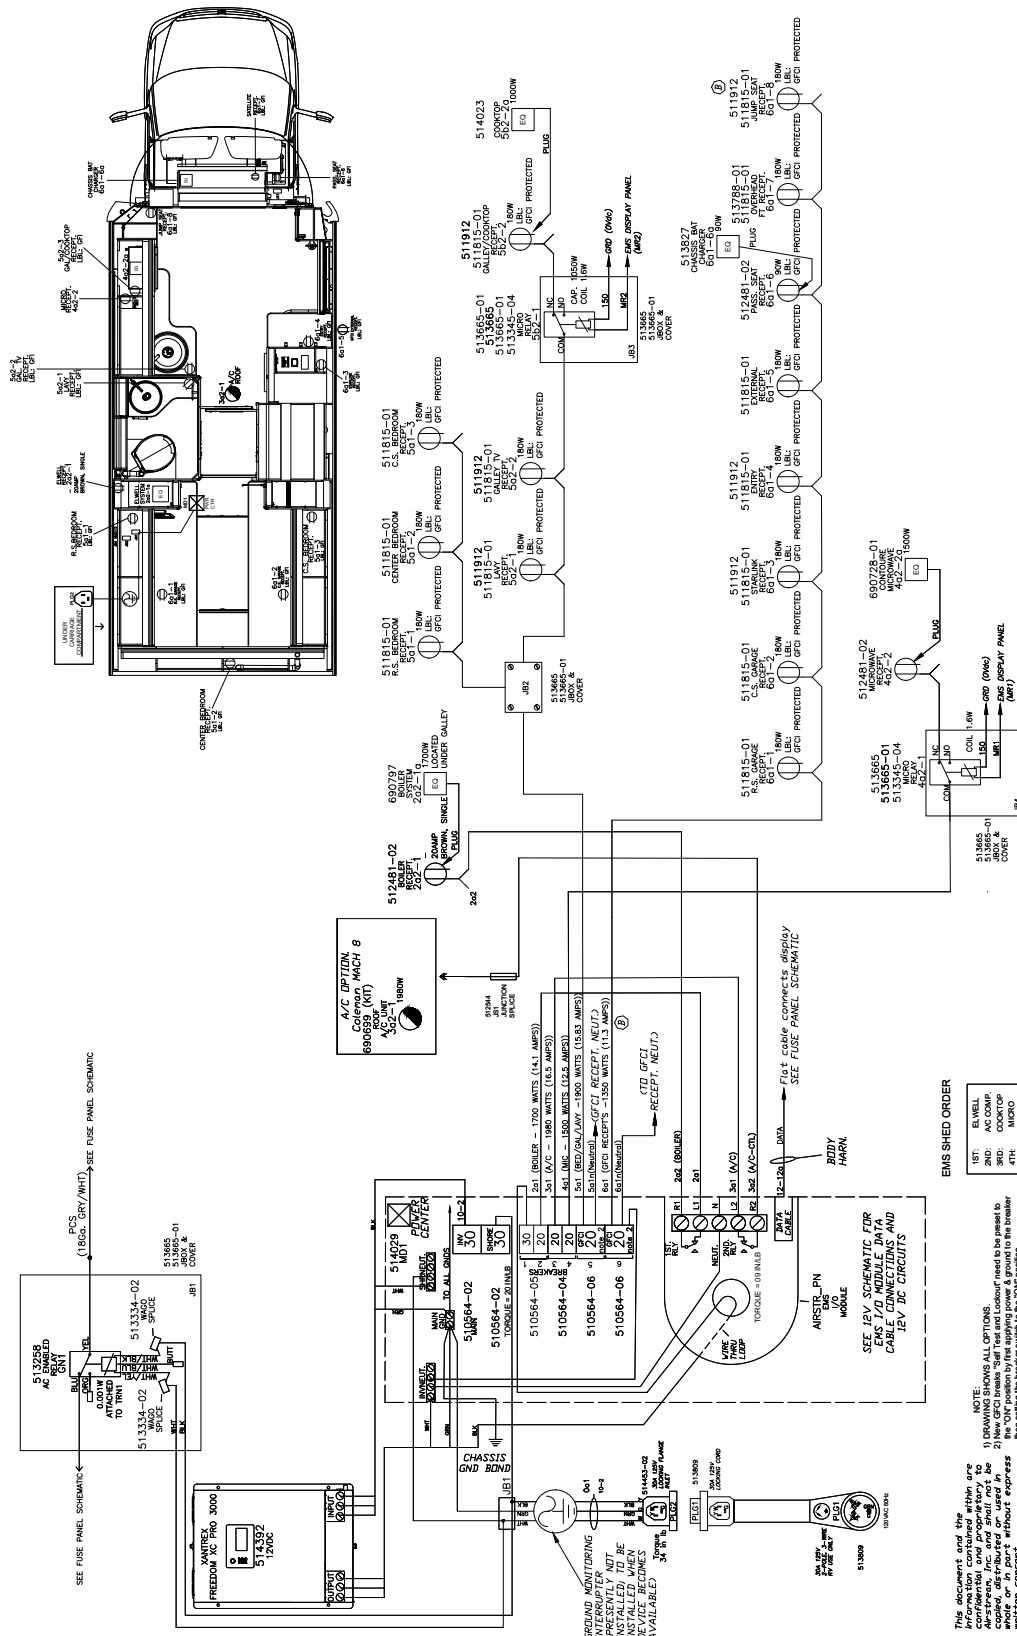



Fresh Water Layout

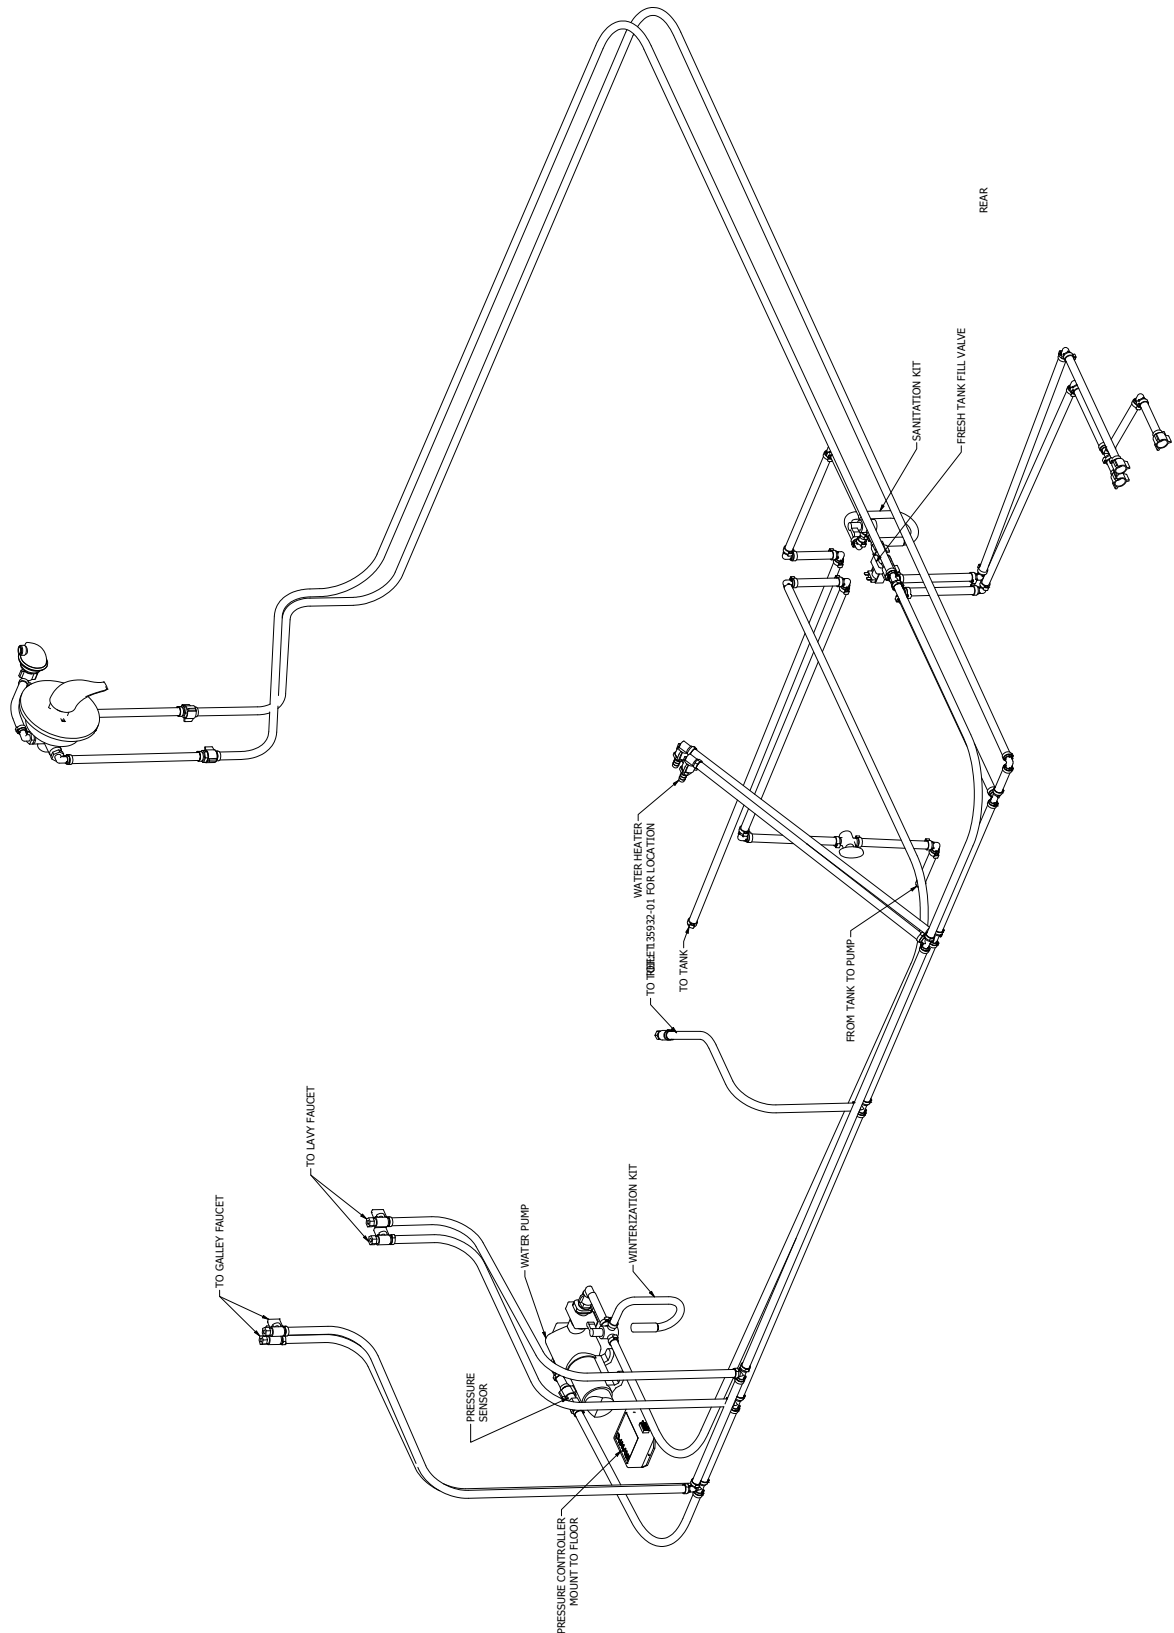

FAQs and Answers

Electrical

1. *What kind of battery do I have in my Airstream?*

Answer: The standard system includes two 270Ah Battle Born Gamechanger LiFePO4 (Lithium Iron Phosphate) batteries, built into a battery pack that provides 6.9kWh of total capacity. For increased power needs, the optional system expands capacity to 17.2kWh; [see House Battery Pack on page 5-12](#).

2. *My house battery is dead and I am no where near a shoreline power source, what can I do?*

Answer: The engine is equipped with a powerful secondary alternator that will charge the house battery pack simply by driving; [see Charging via Secondary Alternator on page 5-15](#).

3. *What sort of temperature limits can my house battery be subjected to?*

Answer: There are several things to consider with regard to operating temperatures, and temperatures at which you can charge the battery; [see Temperature Limits on page 5-13](#).

4. *What is the battery disconnect switch's function?*

Answer: The battery disconnect switch isolates the house batteries from the 12-volt distribution panel and charging system; [see Battery Disconnect Switch on page 5-10](#).

5. *Do you recommend using a surge protector when plugged into shore power?*

Answer: Your Airstream is breaker protected. However, with the use of more personal electronic devices and the number of motorhome users in parks, added protection is always a plus. If you are having trouble charging your house battery, remove the surge protector.

6. *What is my inverter powering?*

Answer: It is powering all appliances (air conditioning, microwave, etc.) and all outlets/receptacles. Your inverter is actually an inverter/charger, and it performs multiple functions; [see Inverter/Charger on page 5-11](#).

7. *I have an alarm going off at my sliding door.*

Answer: Make sure your step and awnings are completely closed. If either of these are not properly closed, and the engine is running, it will cause the alarm to sound.

Plumbing

1. *Do I need a water regulator?*

Answer: No, your Airstream is equipped with a built in regulator rated for 50 psi.

2. *How do I get fresh water into my Atlas?*

Answer: You can use the on board fresh water tank and 12-volt pump for your water supply when camping in a remote area, or hook to an external water source via potable water hose to the exterior city water inlet when parked at a campground; [see City Water Hookup on page 6-7](#).

3. *What is the difference between the gray water tank and the waste water tank?*

Answer: The gray water tank holds water from shower and sink drains. The waste water tank holds sewer water from the toilet.

4. *Can I run the macerator pump if there is no water going through it?*

Answer: No, it will burn the macerator up if it is run dry for more the 10-30 seconds. Also, you should not run it more than 15 minutes continuously.

5. *How do I use the waste tank flush?*

Answer: For information on how to use the tank flush, [see Waste Tank Flush on page 9-8](#).

6. *The gray water tank valve will not open while I have the waste water tank valve open.*

Answer: Only one valve can be open at a time.

Audio-Video

1. *My TV reception is poor. What can I check?*

Answer: Verify if your antenna booster is set to proper selection (On- for antenna and Off- for cable satellite). You should also make sure connections are tight on your TV; [see Entertainment Systems on page 5-18](#).

2. *Will my TV and Blu-Ray/DVD player (user provided) operate while traveling down the highway?*

Answer: Yes, if you turn on the battery disconnect switch at the entry, and turn on the Inverter; [see Inverter/Charger on page 5-11](#).

3. *Does the TV play through the dash stereo?*

Answer: No, the TV's audio is not connected to the dash radio; [see Entertainment Systems on page 5-18](#).

Chassis

1. *Where is my spare tire located?*

Answer: A spare tire is not supplied with the touring coach.

2. *How do I jack the touring coach up to change a tire?*

Answer: Please refer to the Mercedes owner's manual.

3. *Where can I find my Atlas' serial number?*

Answer: A label is attached on the driver's side B-pillar or the passenger's door. This label will also provide the inflation pressure of the tires and weight specifications.

Appliances

1. *I am planning for a trip in my Airstream. How should I get the refrigerator cooled down?*

Answer: Turn the power on and set the thermostat midrange. You can make further adjustments to suit your personal requirements after the box has cooled down. Allow the refrigerator to come down to temperature before loading with product. Setting the thermostat to a higher setting will not decrease the time required for the unit to cool down to its normal operating temperature. Normal refrigerator operating temperatures are 34°F to 40°F.

2. *If I'm driving to my destination, will my refrigerator stay on?*

Answer: Yes, if you turn on the battery disconnect switch at the entry.

3. *My air conditioner freezes up. What is the problem?*

Answer: In high humidity conditions, the AC manufacturer recommends you operate your AC (manual mode) on the high fan setting and all vents should be open to have maximum air flow over the coils; this helps reduce icing. Also, dirty AC filters can restrict air flow and cause the AC to ice up.

Maintenance

1. *Can I have my awning out with heavy winds?*

Answer: No this may cause damage if it is too windy. However, the awning does have a built in sensor that will automatically retract the awning.

2. *I want to clean the exterior of my Airstream. What do you suggest?*

Answer: Airstream recommends washing the exterior using a mild, auto detergent, safe for clear coated surfaces. Airstream recommends washing based on operating conditions, and waxing a minimum of twice a year. Any automotive wax designed specifically for clear coated surfaces will provides good wax protection; [see Exterior Care on page 6-2](#)

NOTES

[illegible]

Index

A

Air Conditioner 5-20
Air Ride Suspension 7-10
Airstream Academy ii
Airstream Supply Company 5-6
Alternator 5-15
Antennas
 TV Antenna 5-18
Appliances 5-20
 Cooktop 5-20
Awning 6-11

B

Battery Disconnect Switch 5-10
Battery Heaters 5-13
Battery Life 5-14
Battery Management System
 (BMS) 5-12
Battery Monitoring/State of Charge
 (SOC) 5-14
Battery Pack 5-12
Beds 5-6
Brake Controller 8-7
Breaker Test 5-8

C

Camping 3-6
 Effects of Prolonged Occupancy
 3-8
 Overnight Stop 3-7
Carbon Monoxide Alarm (Detector)
 2-6
Carbon Monoxide Hazards 2-4
Carbon Monoxide Levels 2-5
Carbon Monoxide Poisoning 2-4
Charger 5-11
Chemical Sensitivity 2-8
Circuit Breakers 5-7
 GFCI 5-7
City Power 5-8
City Water Hookup 6-7
Cleaning
 Interior 5-3
Coach-Net 3-5
Cooktop 5-20

D

DC-DC Charger 5-15
Detectors 2-6
Door
 Entry Door 6-10
 Lubrication and Adjustment 9-11
 Screen Door 6-10
Doormat and Rug Selection 5-4
Drain and Waste System 9-6
Drain System 3-10

E

Electrical Diagrams 9-12
Electrical System Operation 5-10
Electrical System Overview 5-7
Elwell Timberline 5-17
Emergency Exits 2-3
EMS 5-10
Energy Management System 5-10
Exhaust 2-5
Exhaust Gases 2-5
Exterior Care 6-2
Exterior Features 6-6

F

Fan 5-21
FAQs and Answers 9-24
Faucet Care 5-5
Fire and Carbon Monoxide Haz-
 ards 2-4
Fire Extinguisher 2-3
Floor 5-4
Floor Plans 4-2
Formaldehyde 2-8
Fresh Water Layout 9-23
Fuel and Operating Fluids 7-2
Fuse Locations 5-8

G

GFCI 5-7
Gross Axle Weight Rating (GAWR)
 4-4
Gross Combined Vehicle Weight
 Rating (GCWR) 4-4
Gross Vehicular Weight Rating
 (GVWR) 4-4

H

Heating 5-22
Heat Pump 5-20
Hitch 8-4
 Hitch Cover 6-12
Hydraulic Leveling System 6-9
Hydronic Heating and Hot Water
 System 5-22

I

Inverter 5-11
inverter/charger 5-17
Inverter/Charger 5-11

J

Jack 7-7
Jump-Start, RedArc 5-15

L

Labels 4-4
Leveling System 6-9
Loading 8-2
Lug Nut Tightening 7-8

M

Macerator Pump 9-6
 Winterizing 9-10
Maintenance Schedule 9-2
Manufacturer's Certification Label
 4-4
Mercedes me Connect App 7-2
Microwave 5-22
Mold 2-2, 3-9
Multiplex System 5-16

O

Occupant and Cargo Carrying
 Capacity Label 4-4
Outlets 2-2, 5-8

P

Parts 9-3
Plumbing 9-4
Power Center 5-7

Index

R

REDARC Alpha 5-15
Refrigerator/Freezer 5-22
Roadside Assistance 3-5
Rug Selection 5-4

S

Safety 2-2, 8-4
Sanitizing 9-5
Screen Door 6-10
Seat belts 8-4
Seat Belts 2-2, 8-4
SeeLevel 5-17
Service 3-5, 9-3
Shoreline Connection 5-14
Shoreline Power Inlet and Cordset 6-8
Shower, Exterior 6-6
Showerhead 5-5
Shower, Interior 5-5
Sink and Faucet Care 5-5
Smoke and Carbon Monoxide Alarms (Detectors) 2-6
Solar Ports 6-9
Solar System 5-9, 5-15
Specifications 4-3
 Specification Tags 4-4
Starlink Internet/WiFi 5-19
State of Charge (SOC) 5-14
Step 6-7
Storage 9-10
Strainer 9-4

T

Tables 5-6
Tank Heaters 3-10
Temperature Limits 5-13
Timberline 5-17
Tire and Loading Placard 4-4
Tire Care
 Inflation Pressure 4-3
 Tire Size 4-3
Tires 7-5
 Care 9-3
 Changing 7-6
 Inflation 7-4
 Rotation 7-9
Toilet 5-5
 Winterizing 9-11
Torque Value 4-3
Towing
 Backing Up 8-8
 Hitch 8-4
 Towing a Boat 8-6
 Trailer 8-4
 Your Touring Coach 8-10

U

Unloaded Vehicle Weight (UVW) 4-4
User Guide Videos ii
Utility Compartment Doors 6-10

V

Vehicle Storage 9-10
Vent Fan 5-21
Ventilation 2-8
Videos ii
Vinyl Floor 5-4

W

Waste Tank Flush 9-8
Wastewater System 3-9
Water Heater
 Winterizing 9-10
Water Pump 9-5
Water Pump and Strainer 9-4
Water System 9-4
Weighing 8-2
Weight Distribution 8-3
Wheel Bolt/Lug Nut Tightening 7-8
WiFi 5-19
Windows 6-6
Winterizing and Storage 9-8
Winter Traveling 3-10

X

Xantrex inverter/charger 5-17

AIRSTREAM®

Resource Guide

Welcome to Airstream

We have developed a Welcome Book to help get you up to speed quickly and learn the ins and outs of Airstream life. Inside this guide you will find all the resources below and much more.

- A Timeline of Airstream History
- A Guide to Getting Started
- Benefits and Support
- Meet Your People
- Plan a Trip
- Document your Journey

Get Your Welcome Book



Travel Trailer



Touring Coach

Airstream Resources

Owner's Hub



Owner's Manuals



Name Your Airstream



AIRSTREAM SUPPLY COMPANY



Welcome to the Family



Airstream Club International

www.airstreamclub.org

Engage with the longest-rolling, single branded RV club in the world. Your first year "Explorer Membership" is paid for by Airstream.



Visit the Mothership

www.airstream.com/heritage-center

Make plans to visit Airstream in Jackson Center, Ohio to take a factory tour and visit the Heritage Center to experience the history of our iconic brand.

My Airstream

Model Information

Model Year _____

Purchase Date _____

Model Name _____

VIN Number

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Airstream Serial Number

Airstream Dealer

Name: _____

Contact: _____

Phone: _____

Email: _____

Website: _____

AIRSTREAM®

1001 West Pike Street

P.O. Box 629

Jackson Center, OH. 45334-0629

Phone: (937) 596-6111 Fax: (937) 596-7939

www.airstream.com